


# Radifocus® Guide wire M

## Stiff type

Guide wires

87 per.

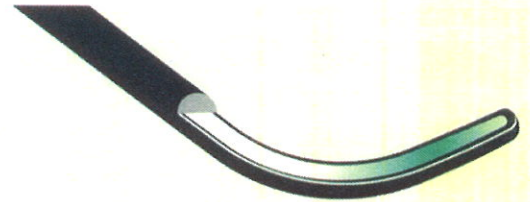

Stiff Nitinol hydrophilic guide wires with excellent torque control and shape memory as well as higher stiffness and resistance.

- Excellent torque control and superior stiffness with reinforced super elastic metallic core
- Superior smoothness and safety with "M" coating and one-piece construction
- Easy to insert due to its round and flexible tip
- Smooth surface to prevent thrombus formation
- Internal radiopaque structure

### Specifications

Code number	Type	Diameter	Length	Flexible length	Distal curve
RF-PA18153M	Stiff	0.020" / 0.51 mm	150 cm	30 mm	Angled
RF-PA18263M	Stiff	0.020" / 0.51 mm	260 cm	30 mm	Angled
RF-PS25153M	Stiff	0.025" / 0.64 mm	150 cm	30 mm	Straight
RF-PA25153M	Stiff	0.025" / 0.64 mm	150 cm	30 mm	Angled
RF-PA25183M	Stiff	0.025" / 0.64 mm	180 cm	30 mm	Angled
RF-PS25263M	Stiff	0.025" / 0.64 mm	260 cm	30 mm	Straight
RF-PA25263M	Stiff	0.025" / 0.64 mm	260 cm	30 mm	Angled
RF-PS35083M	Stiff	0.035" / 0.89 mm	80 cm	30 mm	Straight
RF-PA35083M	Stiff	0.035" / 0.89 mm	80 cm	30 mm	Angled
RF-PS35153M	Stiff	0.035" / 0.89 mm	150 cm	30 mm	Straight
RF-PA35151M	Stiff	0.035" / 0.89 mm	150 cm	10 mm	Angled
RF*PA35153M	Stiff	0.035" / 0.89 mm	150 cm	30 mm	Angled
RF-PS35183M	Stiff	0.035" / 0.89 mm	180 cm	30 mm	Straight
RF*PA35183M	Stiff	0.035" / 0.89 mm	180 cm	30 mm	Angled
RF*PA35188M	Stiff	0.035" / 0.89 mm	180 cm	80 mm	Angled
RF*HR35183M	Half stiff	0.035" / 0.89 mm	180 cm	30 mm	J Angled (1.5 mm)
RF*HR35303M	Half stiff	0.035" / 0.89 mm	300 cm	30 mm	J Angled (1.5 mm)
RF*HN35183M	Half stiff	0.035" / 0.89 mm	180 cm	30 mm	J curve
RF-PS35263M	Stiff	0.035" / 0.89 mm	260 cm	30 mm	Straight
RF-PA35263M	Stiff	0.035" / 0.89 mm	260 cm	30 mm	Angled
RF-PS38083M	Stiff	0.038" / 0.97 mm	80 cm	30 mm	Straight
RF-PS38153M	Stiff	0.038" / 0.97 mm	150 cm	30 mm	Straight
RF-PA38153M	Stiff	0.038" / 0.97 mm	150 cm	30 mm	Angled
RF-PS38183M	Stiff	0.038" / 0.97 mm	180 cm	30 mm	Straight
RF-PA38183M	Stiff	0.038" / 0.97 mm	180 cm	30 mm	Angled
RF-PA38263M	Stiff	0.038" / 0.97 mm	260 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 5