



MXA920

Specifications

Specifications for Shure MXA920-S and MXA920-R ceiling array microphones.
Version: 0.1 (2022-D)

Table of Contents

MXA920 Specifications	3	MXA920 Frequency Response	4
		Dimensions	5

MXA920

Specifications

General

Coverage Type

Automatic or steerable

Power Requirements

Power over Ethernet (PoE), Class 0

Power Consumption

10.1 W maximum

Control Software

Designer or web application

Plenum Rating

MXA920-S	UL2043 (Suitable for Air Handling Spaces)
MXA920-R	Not rated

Dust Protection

IEC 60529 IP5X Dust Protected

Operating Temperature Range

−6.7°C (20°F) to 40°C (104°F)

Storage Temperature Range

−29°C (−20°F) to 74°C (165°F)

Networking

Cable Requirements

Cat5e or higher (shielded cable recommended)

Connector Type

RJ45

Audio

AES67 or Dante Digital Output

Channel Count	Automatic coverage on	2 total channels (1 output, 1 AEC reference in channel)
----------------------	-----------------------	---

	Automatic coverage off	10 total channels (8 independent transmit channels, 1 automix output, 1 AEC reference in channel)
Sampling Rate		48 kHz
Bit Depth		24

Sensitivity*at 1 kHz*

-1.74 dBFS/Pa

Maximum SPL*Relative to 0 dBFS overload*

95.74 dB SPL

Signal-to-Noise Ratio*Ref. 94 dB SPL at 1 kHz*

75.76 dB A-weighted

Latency*Does not include Dante latency*

Direct outputs (Automatic coverage off)	15.9 ms
Automix output (Includes IntelliMix processing)	26.6 ms

Self Noise

18.24 dB SPL-A

Dynamic Range

77.5 dB

Digital Signal Processing

Automatic mixing, acoustic echo cancellation (AEC), noise reduction, automatic gain control, compressor, delay, equalizer (4-band parametric), mute, gain (140 dB range)

Acoustic Echo Cancellation Tail Length


Up to 250 ms

Frequency Response

125 Hz to 20,000 Hz

MXA920 Frequency Response

Frequency response measured directly on-axis from a distance of 6 feet (1.83 m).

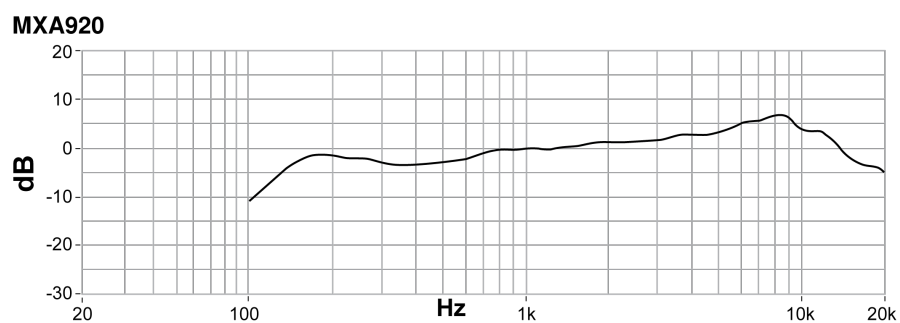

Dimensions

Weight


- MXA920-S: 11.8 lbs (5.4 kg)
- MXA920-R: 12.7 lbs (5.8 kg)

MXA920-S




- A (Microphone flange): 0.41 in. (10.5 mm)
- B (Edge to edge): 23.77 in. (603.8 mm)
- C (Height): 2.15 in. (54.69 mm)

MXA920-S-60CM

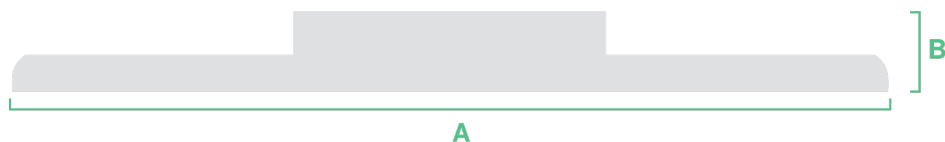

- A (Edge to edge): 23.38 in. (593.8 mm)
- B (Height): 2.15 in. (54.69 mm)

MXA920-R

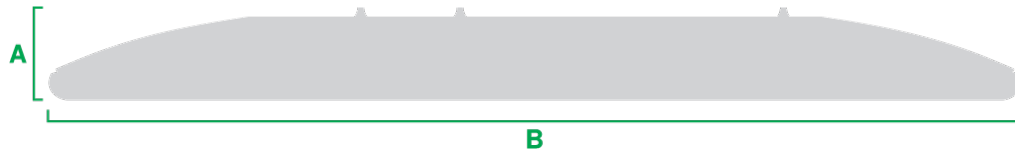

- A (Height to top of eyelets): 2.4 in. (61.3 mm)
- B (Outer diameter): 25 in. (635.4 mm)