


31. Stentas remodeliuojantis srovę

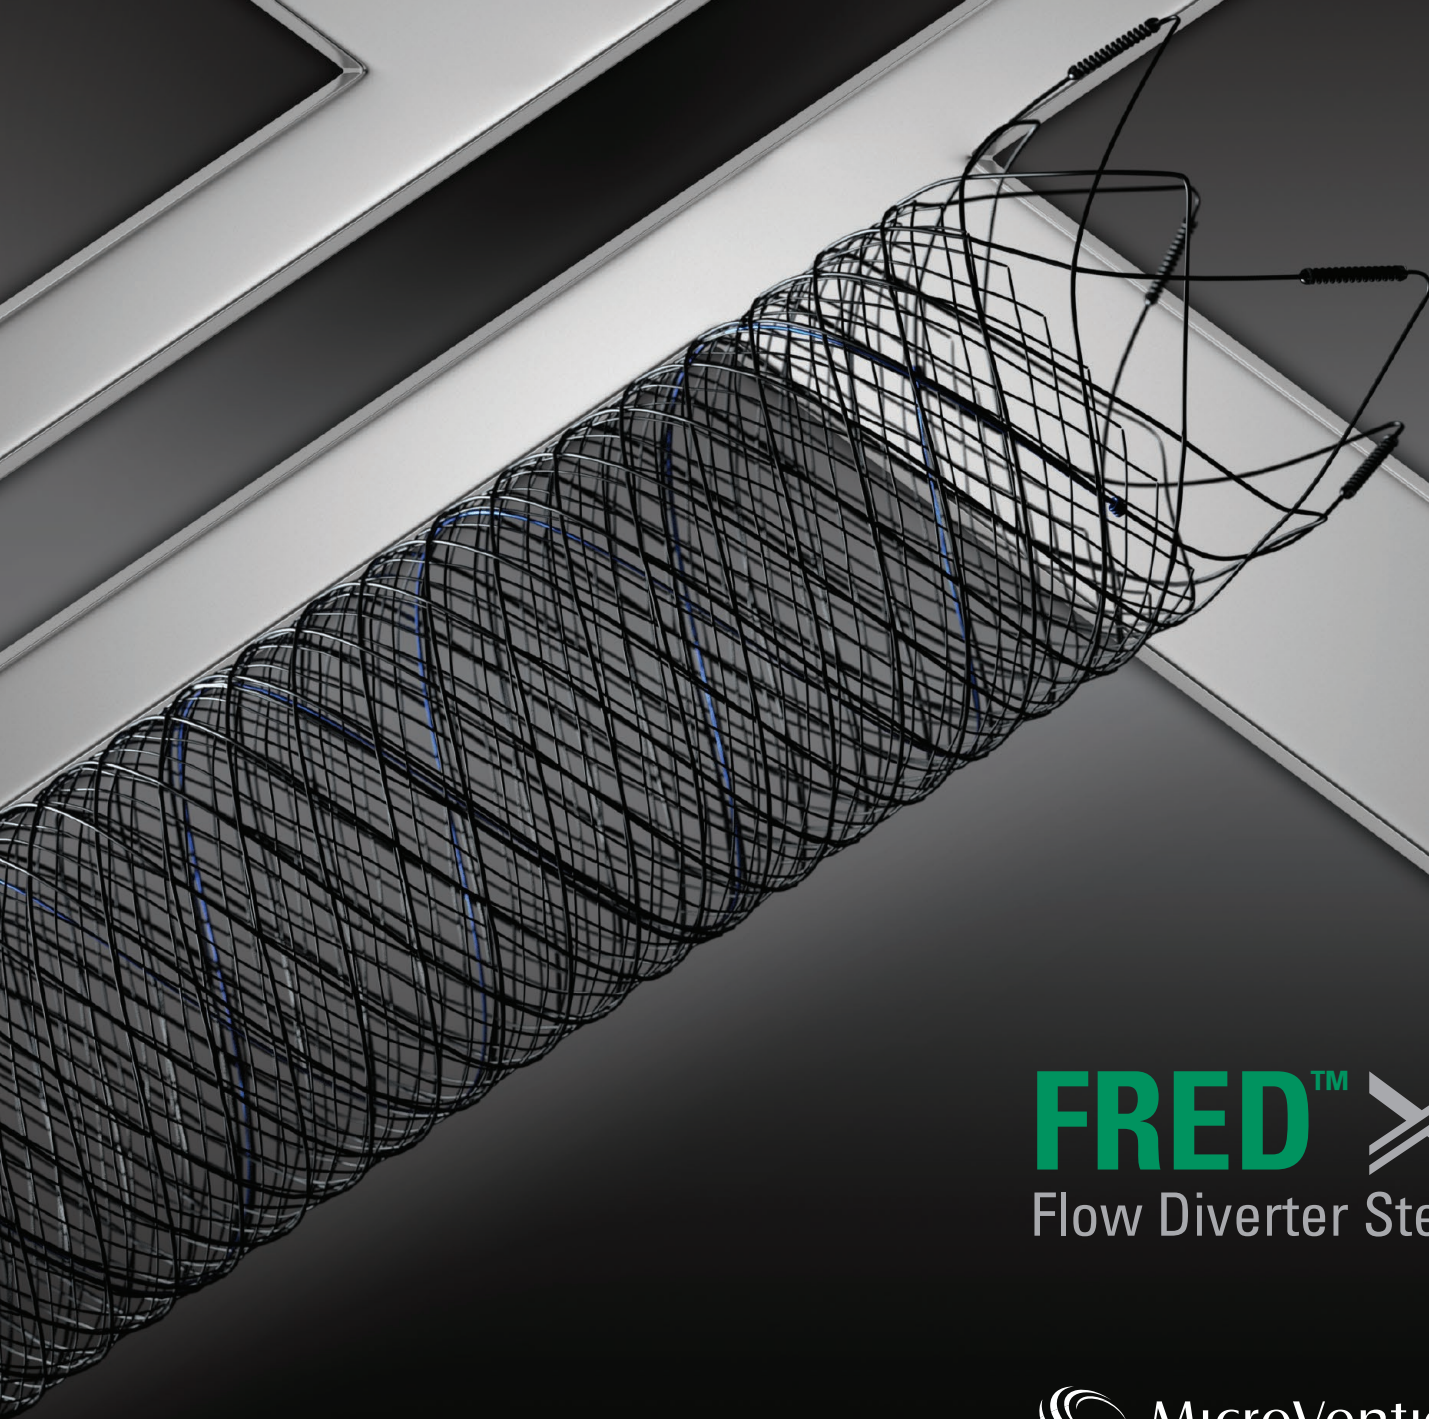


FRED™ ™
Flow Diverter Stent

 **MicroVention®**
TERUMO

31. Stentas remodeliuojantis srovę

FRED™ X™

Flow Diverter Stent

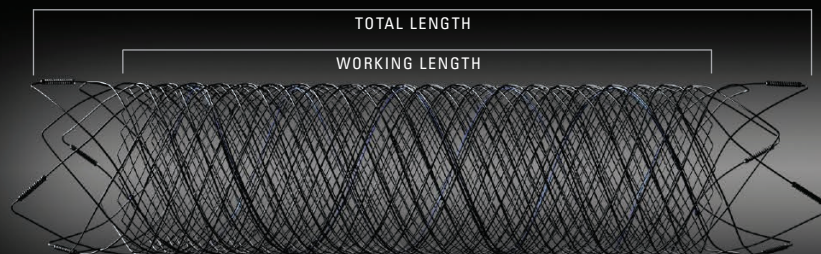

DEVICE	PRODUCT CODE	DEVICE SIZE (mm)			WORKING LENGTH / TOTAL LENGTH IN DIFFERENT VESSEL DIAMETERS (mm)									
		Unconstrained Diameter x Total Length			2.0mm	2.5mm	3.0mm	3.5mm	4.0mm	4.5mm	5.0mm	5.5mm		
FRED X 21	XFRED2508	2.5	X	13	11 / 15	8 / 13								
	XFRED2513	2.5	X	18	17 / 21	13 / 18	Stento diametras - 2,5mm - 5,5mm							
	XFRED2520	2.5	X	25	28 / 32	20 / 25	Stento ilgis - darbinis ilgis 7 mm - 56 mm, bendras ilgis - 13 mm - 62 mm,							
	XFRED2526	2.5	X	30	35 / 38	26 / 30								
	XFRED3009	3.0	X	13		12 / 16	9 / 13							
	XFRED3014	3.0	X	19		19 / 23	14 / 19							
	XFRED3021	3.0	X	27		29 / 34	21 / 27							
	XFRED3027	3.0	X	32		37 / 41	27 / 32							
FRED X 27	XFRED3507	3.5	X	13			10 / 16	7 / 13						
	XFRED3511	3.5	X	17			17 / 22	11 / 17						
	XFRED3516	3.5	X	22			24 / 30	16 / 22						
	XFRED3524	3.5	X	31			34 / 40	24 / 31						
	XFRED3536	3.5	X	40			49 / 54	36 / 40						
	XFRED4007	4.0	X	13				10 / 16	7 / 13					
	XFRED4012	4.0	X	18				18 / 24	12 / 18					
	XFRED4017	4.0	X	23				26 / 31	17 / 23					
	XFRED4026	4.0	X	32				37 / 43	26 / 32					
	XFRED4038	4.0	X	44				53 / 58	38 / 44					
	XFRED4508	4.5	X	15					11 / 18	8 / 15				
	XFRED4513	4.5	X	20					19 / 26	13 / 20				
	XFRED4518	4.5	X	25					27 / 34	18 / 25				
	XFRED4528	4.5	X	34					39 / 45	28 / 34				
	XFRED4539	4.5	X	45					56 / 62	39 / 45				
	XFRED5009	5.0	X	15						12 / 18	9 / 15			
	XFRED5014	5.0	X	21						20 / 26	14 / 21			
	XFRED5019	5.0	X	26						28 / 35	19 / 26			
	XFRED5029	5.0	X	36						41 / 48	29 / 36			
	XFRED5514	5.5	X	22	Stento suderinamumas - stentai iki 3 mm suderinami su visų modelių mikrokateteriais, kurių vidinis skersmuo ID 0,021” ir stentai nuo 3,5 mm suderinami su visų modelių mikrokateteriais, ID 0,027”							22 / 28	14 / 22	
	XFRED5526	5.5	X	32								38 / 46	26 / 32	

DEVICE	PRODUCT CODE	DISTAL ID (in)	PROXIMAL ID (in)	DISTAL OD (Fr/in)	PROXIMAL OD (Fr/in)	LENGTH (cm)
HEADWAY™ 21 and 27 Microcatheters	MC212156S	0.021	0.021	2.1 / 0.026	2.5 / 0.033	156
	MC272156S	0.027	0.027	2.6 / 0.034	3.1 / 0.041	156
SOPIA™ EX Intracranial Support Catheter	ISC5105ST	0.058	0.058	5.2 / 0.068	5.4 / 0.071	105
	ISC5115ST	0.058	0.058	5.2 / 0.068	5.4 / 0.071	115
SOPIA™ Distal Access Catheter	DA5115ST	0.055	0.055	5.1 / 0.067	5.2 / 0.068	115
	DA5125ST	0.055	0.055	5.1 / 0.067	5.2 / 0.068	125
	DA6115ST	0.070	0.070	6.2 / 0.0815	6.3 / 0.0825	115

FRED X Indications for Use: The FRED X System is intended for endovascular embolization of intracranial neurovascular aneurysms. The FRED X System may also be used with embolic coils for the treatment of intracranial neurovascular lesions.

HEADWAY Microcatheter Indications for Use: The HEADWAY Microcatheter is intended for general intravascular use, including the peripheral, coronary and neuro vasculature for the infusion of diagnostic agents, such as contrast media, and therapeutic agents, such as occlusion coils.

SOPIA EX Catheter Indications for Use: The SOPIA EX Catheter is indicated for general intravascular use, including the neuro and peripheral vasculature. The SOPIA EX Catheter can be used to facilitate introduction of diagnostic agents or therapeutic devices. The SOPIA EX Catheter is not intended for use in coronary arteries.

SOPIA Catheter Indications for Use: The SOPIA Catheter is indicated for general intravascular use, including the neuro and peripheral vasculature. The SOPIA Catheter can be used to facilitate introduction of diagnostic or therapeutic agents. The SOPIA Catheter is not intended for use in coronary arteries. Moreover, the SOPIA Catheter is intended for use in removal/aspiration of emboli and thrombi from selected blood vessels in the arterial system, including the peripheral and neuro vasculatures.

For Healthcare professional use only.



microvention.com

MicroVention Worldwide
Innovation Center
35 Enterprise
Aliso Viejo, CA 92656
PH +1.714.247.8000
PH +1.800.990.8368

MicroVention UK Limited
Suite 3, The Barracks Building
10 Cliffords Fort, North Shields
Tyne and Wear, NE30 1JE
United Kingdom
PH +44 (0) 191 258 6777
F +44 (0) 191 258 5999

MicroVention Europe, SARL
30 bis, rue du Vieil Abreuvoir
78100 Saint-Germain-en-Laye
France
PH +33 (1) 39 21 77 46
F +33 (1) 39 21 16 01

MicroVention Deutschland GmbH
Hildebrandtstr. 4 F
D-40215 Düsseldorf
Germany
PH +49 211 210 798-0
F +49 211 210 798-29

