


Alpari

Destination®

Guiding Sheath

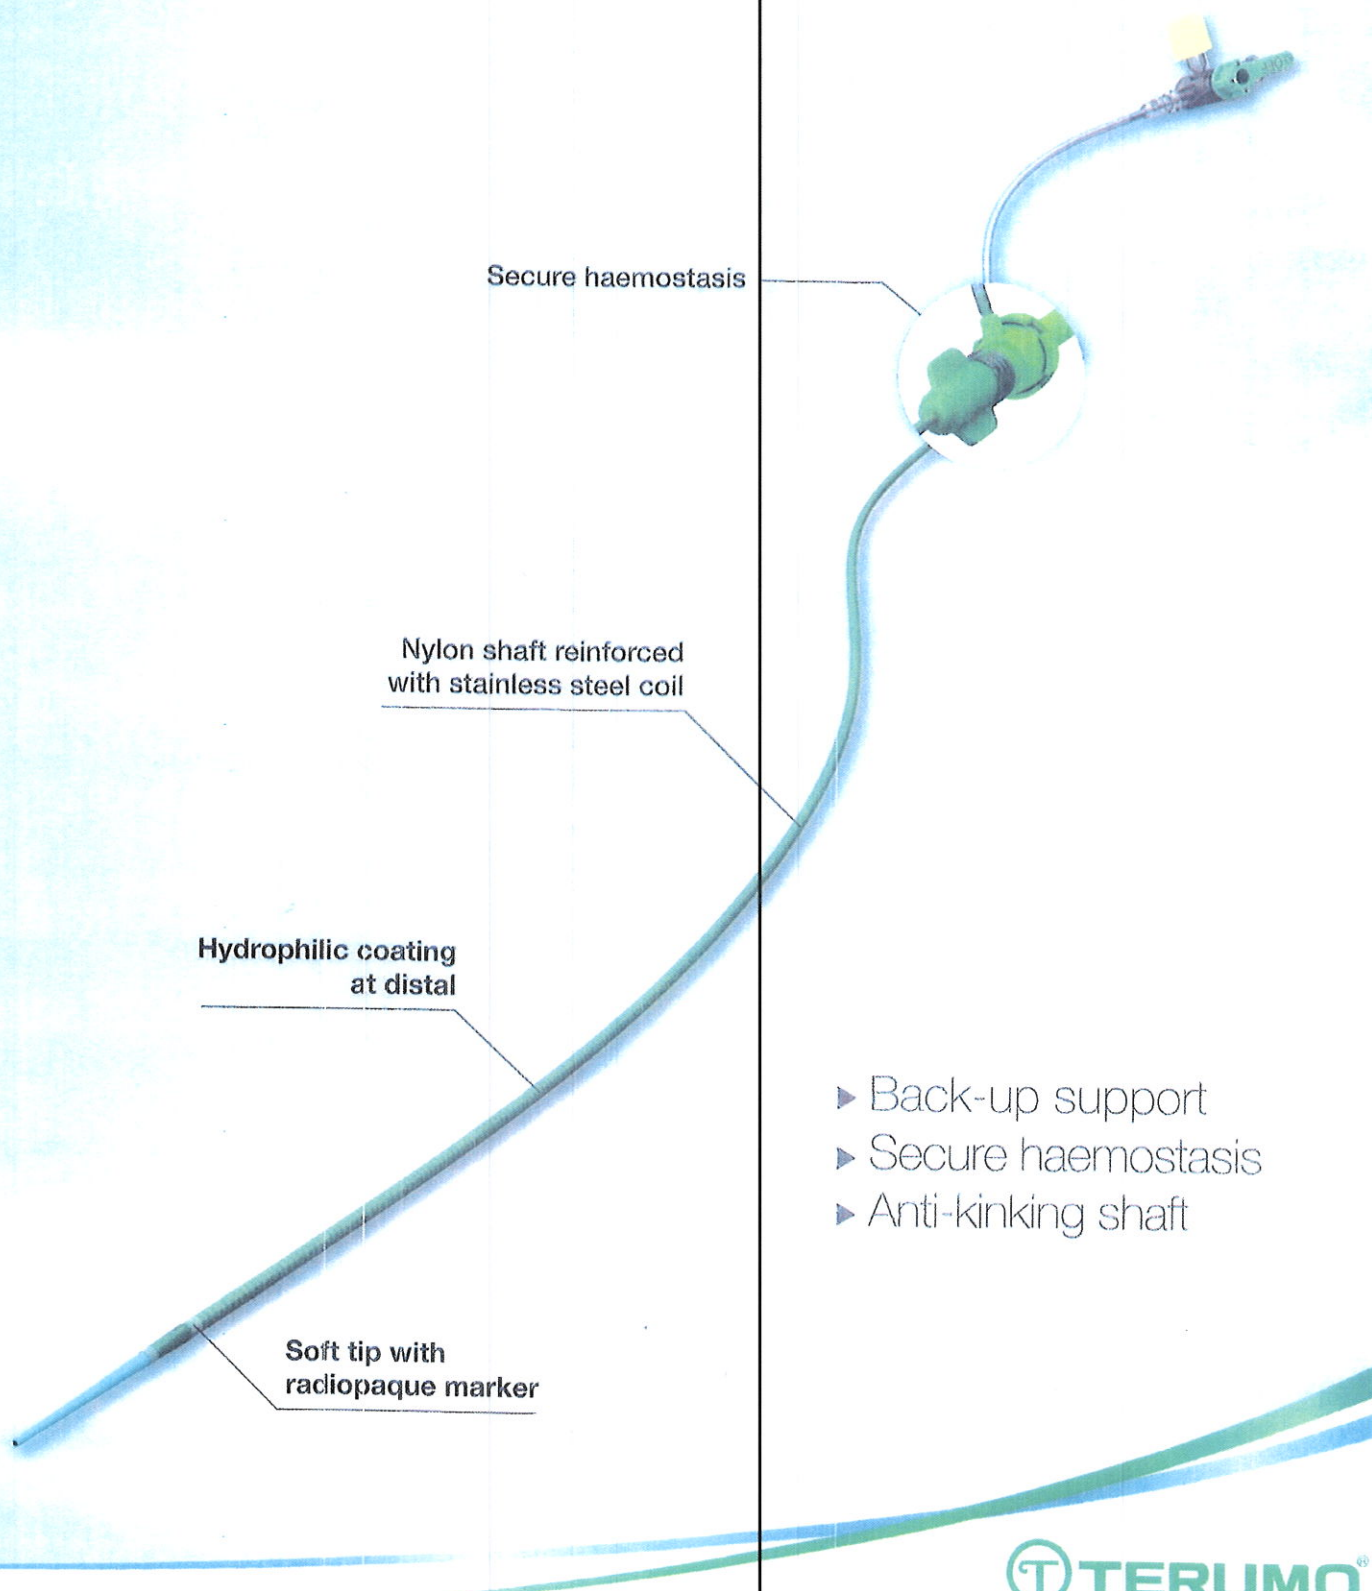

TERUMO®

Destination®


Large lumen, trackability
and kink resistance

- **Optimal flexibility** while maintaining a high level of kink resistance and back-up support
- **Coil reinforced** tubing with PTFE inner liner minimizes friction, promotes smooth passage of devices
- Specially designed **atraumatic tip** minimizes vessel damage without sacrificing smooth transitions and easy penetration

Cross Cut™ haemostatic valve




Tuohy-Borst valve




Inner diameter


5Fr



6Fr



7Fr




Specifications

Curve type	Inner diameter	Length
	5 Fr / 0.076" / 1.9 mm	45 cm
	5 Fr / 0.076" / 1.9 mm	45 cm
	5 Fr / 0.076" / 1.9 mm	45 cm
	5 Fr / 0.076" / 1.9 mm	45 cm
	5 Fr / 0.076" / 1.9 mm	45 cm
	5 Fr / 0.076" / 1.9 mm	45 cm
	5 Fr / 0.076" / 1.9 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	7 Fr / 0.100" / 2.5 mm	45 cm
	8 Fr / 0.114" / 2.9 mm	45 cm
	6 Fr / 0.087" / 2.2 mm	65 cm
	7 Fr / 0.100" / 2.5 mm	65 cm
	8 Fr / 0.114" / 2.9 mm	65 cm
	5 Fr / 0.076" / 1.9 mm	90 cm
	5 Fr / 0.076" / 1.9 mm	90 cm
	5 Fr / 0.076" / 1.9 mm	90 cm
	5 Fr / 0.076" / 1.9 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	6 Fr / 0.087" / 2.2 mm	90 cm
	7 Fr / 0.100" / 2.5 mm	90 cm
	7 Fr / 0.100" / 2.5 mm	90 cm
	7 Fr / 0.100" / 2.5 mm	90 cm
	7 Fr / 0.100" / 2.5 mm	90 cm
	7 Fr / 0.100" / 2.5 mm	90 cm
	7 Fr / 0.100" / 2.5 mm	90 cm
	8 Fr / 0.114" / 2.9 mm	90 cm
	8 Fr / 0.114" / 2.9 mm	90 cm

All dilators are 0.038" (0.96 mm) wire compatible

Inner diameter

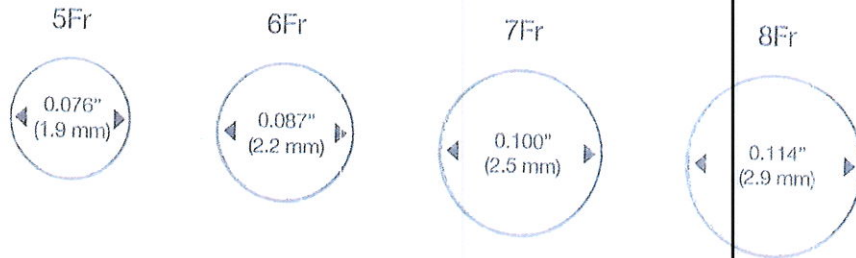

Specifications

Curve type	Inner diameter	Length	Hydrophilic coating length	Distal curve	Valve	Item reference
	5 Fr / 0.076" / 1.9 mm	45 cm	5 cm	Straight	CCV*	GS*F5ST1C45
	5 Fr / 0.076" / 1.9 mm	45 cm	5 cm	Hockey Stick	CCV	GS*F5HS1C45
	5 Fr / 0.076" / 1.9 mm	45 cm	5 cm	Multipurpose	CCV	GS*F5MP1C45
	5 Fr / 0.076" / 1.9 mm	45 cm	5 cm	RDC	CCV	GS*F5RDCC45
	5 Fr / 0.076" / 1.9 mm	45 cm	5 cm	LIMA	CCV	GS*F5LIMC45
	6 Fr / 0.087" / 2.2 mm	45 cm	5 cm	Straight	CCV	RSR01
	6 Fr / 0.087" / 2.2 mm	45 cm	5 cm	Hockey Stick	CCV	RSR02
	6 Fr / 0.087" / 2.2 mm	45 cm	5 cm	Multipurpose	CCV	RSR03
	6 Fr / 0.087" / 2.2 mm	45 cm	5 cm	RDC	CCV	RSR13
	6 Fr / 0.087" / 2.2 mm	45 cm	5 cm	LIMA	CCV	RSR14
	7 Fr / 0.100" / 2.5 mm	45 cm	5 cm	Straight	CCV	RSR04
	7 Fr / 0.100" / 2.5 mm	45 cm	5 cm	Hockey Stick	CCV	RSR05
	7 Fr / 0.100" / 2.5 mm	45 cm	5 cm	Multipurpose	CCV	RSR06
	7 Fr / 0.100" / 2.5 mm	45 cm	5 cm	RDC	CCV	RSR15
	7 Fr / 0.100" / 2.5 mm	45 cm	5 cm	LIMA	CCV	RSR16
	8 Fr / 0.114" / 2.9 mm	45 cm	35 cm	Straight	CCV	54-84501
	6 Fr / 0.087" / 2.2 mm	65 cm	35 cm	Straight	CCV	RSP01
	7 Fr / 0.100" / 2.5 mm	65 cm	35 cm	Straight	CCV	RSP02
	8 Fr / 0.114" / 2.9 mm	65 cm	35 cm	Straight	CCV	54-86501
	5 Fr / 0.076" / 1.9 mm	90 cm	15 cm	Straight	TBV**	GS*K5ST1T90B
	5 Fr / 0.076" / 1.9 mm	90 cm	15 cm	Multipurpose	TBV	GS*K5MP1T90B
	5 Fr / 0.076" / 1.9 mm	90 cm	15 cm	Straight	CCV	GS*K5ST1C90B
	5 Fr / 0.076" / 1.9 mm	90 cm	15 cm	Multipurpose	CCV	GS*K5MP1C90B
	6 Fr / 0.087" / 2.2 mm	90 cm	15 cm	Straight	TBV	RSC01
	6 Fr / 0.087" / 2.2 mm	90 cm	15 cm	Multipurpose	TBV	RSC03
	6 Fr / 0.087" / 2.2 mm	90 cm	15 cm	Straight	CCV	RSC05
	6 Fr / 0.087" / 2.2 mm	90 cm	15 cm	Multipurpose	CCV	RSC07
	7 Fr / 0.100" / 2.5 mm	90 cm	15 cm	Straight	TBV	RSC02
	7 Fr / 0.100" / 2.5 mm	90 cm	15 cm	Multipurpose	TBV	RSC04
	7 Fr / 0.100" / 2.5 mm	90 cm	15 cm	Straight	CCV	RSC06
	7 Fr / 0.100" / 2.5 mm	90 cm	15 cm	Multipurpose	CCV	RSC08
	8 Fr / 0.114" / 2.9 mm	90 cm	60 cm	Straight	CCV	54-89001
	8 Fr / 0.114" / 2.9 mm	90 cm	60 cm	Straight	TBV	54-89006

All dilators are 0.038" (0.96 mm) wire compatible

* Cross Cut Valve (Tosuno's standard sheath valve). ** Tuohy-Borst Valve (Y-shape rotating valve)