



Textilní zkušební ústav, s.p.

TESTING LABORATORY
Cejl 480/12, 602 00 Brno, Czech Republic

TESTING LABORATORY 1001

accredited according to ČSN EN ISO/IEC 17025:2018 by the Czech Accreditation Institute

TEST REPORT

AZL 24/0608

CUSTOMER: UAB TEKSNIJA
J. Dobkevičiaus g. 8a
021 89 Vilnius
Lithuania

SAMPLE: Knitted fabric: Art. 3962
(according to the customer order) Fibre composition: 100 % polyester
Colour: black



Textilní zkušební ústav
Cejl 480/12
602 00 Brno



The laboratory is not responsible for information supplied by the customer that may affect the validity of test results.

CONDITIONS OF APPLICATION OF THE TEST REPORT:

Test Report contains results of the tests related to the submitted sample only. Sampling has been done by the customer. The Report may not be reproduced in any way other than as a complete set. Reproduction of certain parts of the Report is subject to approval of the test laboratory, which has issued it. All information about subcontracted tests results or unaccredited test methods is presented in text part of the test report. Unless otherwise stated, all tests were performed at the address, listed in the header.

PREPARED BY:
CHECKED BY:
NUMBER OF PAGES:

I. Tichá
A. Uhrová
9

DATE OF ACCEPTANCE:
27.5.2024

DATE OF EXAMINATION:
28.05.-18.06.2024

DATE OF ISSUE:
19.06.2024



+420 543 426 730
www.tzu.cz
azl@tzu.cz



Determination of textile fibres composition in mixtures by gravimetry

was performed according to the Regulation No. 1007/2011 of the European Parliament and of the Council. Before the analysis all fibres in the sample were examined and identified microscopically and/or using ATR-FTIR spectrometry.

- Test method: No. 14 with sulphuric acid (conc.) - content of polyester fibres

Result: Content of analysed fibres as a percentage (%) corrected using agreed allowances (annex IX)

Results (%)	
polyester	100

Weave

was determined according to ČSN 80 0018:1993

- testing and conditioning atmosphere: temperature (20±2) °C; RH (65±4) %

Result: verbal description of the weave

This test is outside of the accreditation scope.

Results
interlock weave

Determination of mass indicators - mass per unit area using small samples

was performed according to ČSN EN 12127:1998

- conditions of testing: ČSN EN ISO 139:2005; temperature (20±2) °C; RH (65±4) %
- treatment/relaxation procedure before testing: any procedure applied
- specimens tested: 5
- specimen dimensions: 10 x 10 cm

Results	
Mean mass per unit area (g.m ⁻²)	210
coefficient of variation (%)	0,2





Dimensional change after wet treatment

was evaluated according to ČSN EN ISO 5077:2008. The samples for evaluation were prepared according to ČSN EN ISO 3759:2012. Washing was carried out according to ČSN EN ISO 6330:2022

- conditioning: ČSN EN ISO 139:2005; temperature (20±2) °C, RH (65±4) %
- washing machine: type A (FOM-71MP, Electrolux-Wascator)
- specimens tested: 1
- procedure: 4N (40±3) °C
- detergent: standard 3 ECE
- ballast used: type III (ČSN EN ISO 6330:2022)
- total ballast load: 2 kg
- number of washing cycles: 1
- drying procedure: procedure A – Line dry
- measuring positions number: three pairs of markers
- specimen type: flat textile

The combined measurement uncertainty is approximately 0.1%

Results	warp / weft direction
Dimensional change (%)	0 / 0

Determination of the permeability of fabrics to air

was performed according to ČSN EN ISO 9237:1995

- testing and conditioning atmosphere: temperature (20±2) °C; RH (65±4) %
- direction of the air flow: from inner to face side
- test surface area used: 20 cm²
- specimens tested: 10
- pressure drop used: 100 Pa

Results	
Mean air permeability R (mm.s⁻¹)	538
coefficient of variation (%)	1,3






Textilní zkušební ústav, s.p.

Overall Moisture Management Capability (OMMC)

was performed according to AATCC 195:2011

- conditioning: temperature (20±2) °C, RH (65±4) %
- number of specimens tested: 5
- dimension: 80 x 80 mm
- machine: MMT
- wetting time: 120 s

Results*	
One – way transport index (index)	3,5
Overall moisture management (index)	3,5
Max wetted radius (ratio top/bottom)	1,0

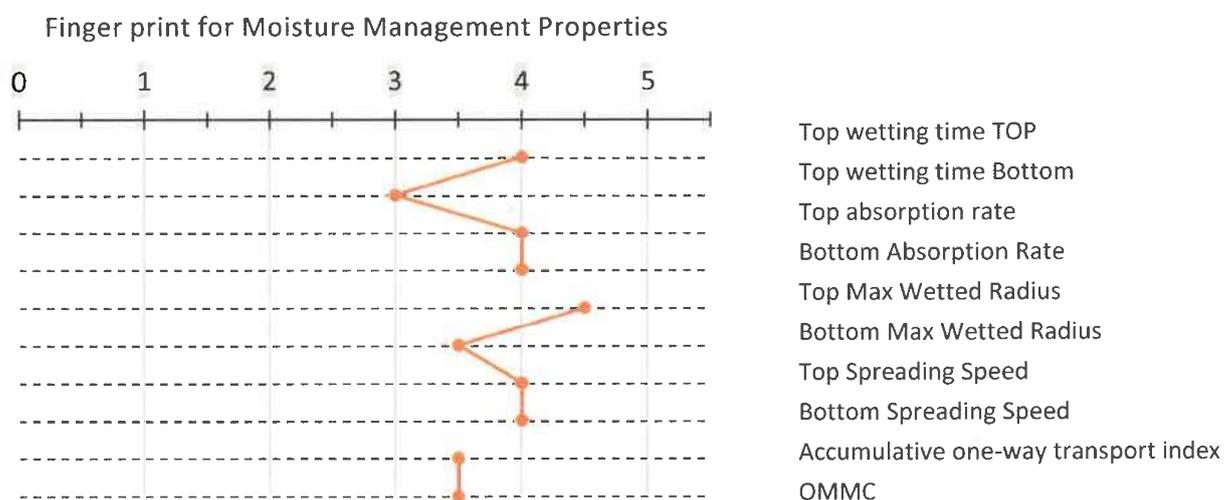

* Test result was taken from the Test Report No. AZL 24/0282 issued 03.04.2024 delivered by customer.





Testing the resistance to pilling and matting of textile fabrics. Modified Martindale method and assessment of pilling, fuzzing and matting by visual analysis

was performed according to ČSN EN ISO 12945-2:2021 – modified Martindale method

- conditioning: temperature (20±2) °C; RH (65±4) %
- specimens' treatment before testing: tested in original state
- loading mass and nominal pressure used:(155±1) g
- number of specimens tested / evaluators: 3 / 3
- abrasant: wool

Results: Evaluation of surface change in grades according to ČSN EN ISO 12945-4:2021

Results:												
Pilling rubs	Pilling				Fuzzing				Matting			
	sp.1	sp.2	sp.3	average	sp.1	sp.2	sp.3	average	sp.1	sp.2	sp.3	average
125	5	5	5	5	5	5	5	5	-	-	-	-
500	5	5	5	5	5	5	5	5	-	-	-	-
1000	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	-	-	-	-
2000	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	-	-	-	-
5000	4	4	4	4	4	4	4	4	-	-	-	-
7000	4	4	4	4	4	4	4	4	-	-	-	-

Determination of the abrasion resistance of fabrics using a Martindale abrasion testing apparatus

was performed according to ČSN EN ISO 12947-2:2017

- conditioning: temperature (20±2) °C; RH (65±4) %
- mass and nominal pressure used: (595±7) g/ 9 kPa
- specimen treatment before testing: tested in original state
- specimens tested: 3
- foam backing: used
- specimen fabric type/end-point assessment: knitted fabric (without pile) / 1 thread broken

Result: The lowest individual result of all test specimens expressed by the number of rubs, prior to the end-point being reached.

Results	
Abrasion resistance	90 000
specimen 1	90 000
specimen 2	90 000
specimen 3	90 000





Determination of colour fastness to rubbing

was tested according to ČSN EN ISO 105-X12:2016

- rubbing conditions: dry / wet (wetting of rubbing cloth: 100 %)
- rubbing finger: for textiles [diameter (16±0,1) mm; downward force (9±0,2) N]
- climatic conditions during testing: temperature (20±2) °C, RH (65±2) %
- time of air-conditioning of samples: 4 hours

Result: grade of grey scale (staining to cotton rubbing cloth according to ČSN EN ISO 105-A03:2020)

Results	
staining in warp / weft direction	
dry conditions	5 / 5
wet conditions	5 / 5

Determination of colour fastness to washing

was tested according to ČSN EN ISO 105-C06:2010

- test conditions: A1S (40 °C)
- steel balls number: 10
- washing detergent: ECE
- souring treatment: not used
- adjacent fabrics: polyester/cotton
- treatment before testing: 5x washing according to ČSN EN ISO 6330:2022 (4N, A)

Result: grade of grey scale (colour change according to ČSN EN 20105-A02:1995, staining according to ČSN EN ISO 105-A03:2020)

Results	
colour change / staining	
5 / 5 / 5	

Determination of colour fastness to perspiration

was tested according to ČSN EN ISO 105-E04:2013

- adjacent fabrics: polyester/cotton
- the option used: samples tested horizontally

Result: grade of grey scale (colour change according to ČSN EN 20105-A02:1995, staining according to ČSN EN ISO 105-A03:2020)

Results	
colour change / staining	
alkaline solution	5 / 4-5 / 4-5
acid solution	5 / 4-5 / 4-5





Textilní zkušební ústav, s.p.

Determination of colour fastness to artificial light: Xenon arc fading lamp test

was tested according to ČSN EN ISO 105-B02:2015

- instrument: QSUN-Xe2, model B02, air cooled Xe lamp
- lighting procedure: method 2
- sample's rotation: not used
- exposure conditions: A1 - normal, adequate to mild zone (RH 40 %, BST (45±3) °C)
- approximate radiation energy: (300-400 nm): 20,1 MJ/m²

Result: grade of blue scale

Results
colour change
5

Determination of free, hydrolysable and releasable formaldehyde (water extraction method) by spectrophotometry

was performed according to ČSN EN ISO 14184-1:2012 (ISO 14184:2011)

- sample delivery: by regular postal service, wrapped in plastic bag
- sample storage before testing: in original plastic bag, prior analysis stored in glass bottles
- specimen weight: ca 1g
- range of calibration graph: 4 - 600 mg.kg⁻¹

Results ¹⁾	
Content of Formaldehyde (mg.kg ⁻¹)	not detectable

¹⁾ Results below 16 mg.kg⁻¹ are reported as "not detectable"





Determination of certain aromatic amines derived from azo colorants by GC/MS method

was performed according to ČSN EN ISO 14362-1:2017 and ČSN EN ISO 14362-3:2017. Determination was carried out using gas chromatography with mass spectrometry (GC-MS).

Arylamine	CAS Number	Value obtained ¹⁾ (mg.kg ⁻¹)	Limit REACH (mg.kg ⁻¹)
4-aminobiphenyl	92-67-1	< 0,5	< 30
benzidine	92-87-5	< 0,5	< 30
4-chlor-o-toluidine	95-69-2	< 0,5	< 30
2-naftylamine	91-59-8	< 0,5	< 30
o-aminoazotoluene	97-56-3	< 0,5	< 30
5-nitro-o-toluidine	99-55-8	< 0,5	< 30
4-chloraniline	106-47-8	< 0,5	< 30
4-methoxy-m-fenylendiamine	615-05-4	< 0,5	< 30
4,4'-methylendianiline	101-77-9	< 0,5	< 30
3,3'-dichlorbenzidine	91-94-1	< 0,5	< 30
3,3'-dimetoxybenzidine	119-90-4	< 0,5	< 30
3,3'-dimethylbenzidine	119-93-7	< 0,5	< 30
4,4'-methylen-di-o-toluidine	838-88-0	< 0,5	< 30
6-methoxy-m-toluidine	120-71-8	< 0,5	< 30
4,4'-methylen-bis(2-chloraniline)	101-14-4	< 0,5	< 30
4,4'-oxydianiline	101-80-4	< 0,5	< 30
4,4'-thiodianiline	139-65-1	< 0,5	< 30
o-toluidine	95-53-4	< 0,5	< 30
4-methyl-m-fenylenediamine	95-80-7	< 0,5	< 30
2,4,5-trimethylaniline	137-17-7	< 0,5	< 30
o-anisidine	90-04-0	< 0,5	< 30
4-aminoazobenzene ²⁾	60-09-3	< 0,5	< 30
aniline	62-53-3	< 0,5 ³⁾	

¹⁾ Symbol "<" means bellow LOD (limit of detection) of analytical method.

²⁾ Azo colorants, which are able to form 4-aminoazobenzene, generate aniline (CAS 62-53-3) and 1,4-phenylenediamine (CAS 1056-50-3) at conditions of ČSN EN ISO 14362-1:2017. If aniline is detected above 5 mg.kg⁻¹ then the presence of 4-aminoazobenzene should be additionally tested according to ČSN EN ISO 14362-3:2017 (unaccredited test method). The obtained value of 4-aminoazobenzene is valid for total content.

³⁾ The value obtained meets the limit valid for 4-aminoazobenzene.





Content of nonylphenol, octylphenol, nonylphenol ethoxylates, octylphenol ethoxylates was determined according to DIN EN ISO 18254-1:2016 and DIN EN ISO 18254-2:2019. Determination was subcontracted in STFI, Test Report No. P20241123 issued 11.06.2024.
Result: Content in mg.kg⁻¹.

	Results (mg.kg⁻¹)
Octylphenol ¹⁾	< 2,0
Nonylphenol ¹⁾	< 2,0
Octylphenoethoxylates	< 2,0
Nonylphenoethoxylates	< 2,0
DIN EN ISO 18254-1	< 2,0
Octylphenol ¹⁾	< 2,0
Nonylphenol ¹⁾	< 2,0
Octylphenoethoxylates	< 2,0
Nonylphenoethoxylates	< 2,0
DIN EN ISO 18254-2	< 2,0

¹⁾ DIN 18254 is not explicit for these substances, but these substances can be determined according to this standard.

Content of phthalates

was determined according to ČSN EN ISO 14389:2023. Determination was subcontracted in VÚTCH s.r.o., Test Report No. 61/2024 issued 06.06.2024.

Results: Content in wt (%).

Individual phthalate	Results (wt %)
DEHP	< 0,01
BBP	< 0,01
DBP	< 0,01
DMEP	< 0,01
DIBP	< 0,01
DIHP	< 0,01
DHNUP	< 0,01
DHP	< 0,01

Approved by:

Markéta Hrubanová
Head of Testing Laboratories

End of report

