

1 Beakers, Borosilicate glass 3.3, low form

DIN 12 331. ISO 3819. With approximate graduations and spout.


Capacity ml	Ext. diam. mm	Height mm	PK	Cat. No.
5	22	30	10	9.013 905
10	26	35	10	9.013 906
25	34	50	10	9.013 900
50	42	60	10	9.013 901
100	50	70	10	9.013 902
150	60	80	10	9.013 903
250	70	95	10	9.013 904
400	80	110	10	9.013 910
600	90	125	10	9.013 911
800	100	135	10	9.013 912
1000	105	145	10	9.013 913
2000	130	185	4	9.013 914
3000	150	210	4	9.013 915
5000	170	270	2	9.013 916



2 Beakers, Borosilicate glass 3.3, tall form

DIN 12 331. ISO 3819. With approximate graduations and spout.

Capacity ml	Ext. diam. mm	Height mm	PK	Cat. No.
25	30	55	10	9.013 924
50	38	70	10	9.013 925
100	48	80	10	9.013 920
150	54	95	10	9.013 921
250	60	120	10	9.013 922
400	70	130	10	9.013 923
600	80	150	10	9.013 930
800	90	175	10	9.013 931
1000	95	180	10	9.013 932
2000	120	240	6	9.013 933
3000	135	280	6	9.013 934

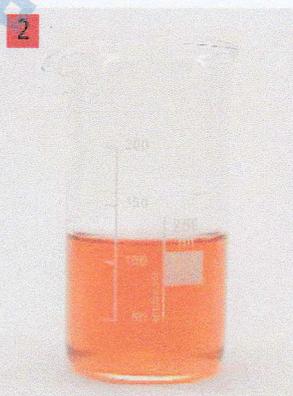

3 Beakers, DURAN®, low form

With approximate graduations and spout. DIN 12331. ISO 3819. With easy-to-read scale and large labelling field for easy marking. In fired-on, highly durable white ceramic. Due to the uniformly wall thickness, it is suitable for use as a heating vessel. Glass Type I/neutral as per USP, EP and JP. With retrace code (Batch Identification, for all) except 5ml, 10ml and 25ml. Certificate available via the Internet. Autoclavable.

DURAN Group

Capacity ml	Diam. mm	Height mm	PK	Cat. No.
5*	22	30	1	9.013 007
10*	26	35	1	9.013 008
25	34	50	1	9.013 014
50	42	60	1	9.013 017
100	50	70	1	9.013 024
150	60	80	1	9.013 029
250	70	95	1	9.013 036
400	80	110	1	9.013 041
600	90	125	1	9.013 048
800	100	135	1	9.013 053
1000	105	145	1	9.013 054
2000	132	185	1	9.013 063
3000	152	210	1	9.013 068
5000	170	270	1	9.013 073
10000**/**	217	350	1	9.013 086

* Without graduations.

** Not to DIN and ISO.



4 Beakers Super Duty, DURAN®, low form

With approximate graduations and spout. Reinforced, sturdy rim and increased mechanical strength for heavy duty. Glass Type I/neutral glass as per USP, EP and JP. With retrace code (Batch Identification). Certificate available via the Internet. Autoclavable.

DURAN Group

Capacity ml	Diam. mm	Height mm	PK	Cat. No.
150	60	80	1	9.051 150
250	70	95	1	9.051 151
400	80	110	1	9.051 152
600	90	125	1	9.051 153
1000	105	145	1	9.051 154
2000	132	185	1	9.051 155
5000	170	270	1	9.051 156



27.2
27.1