
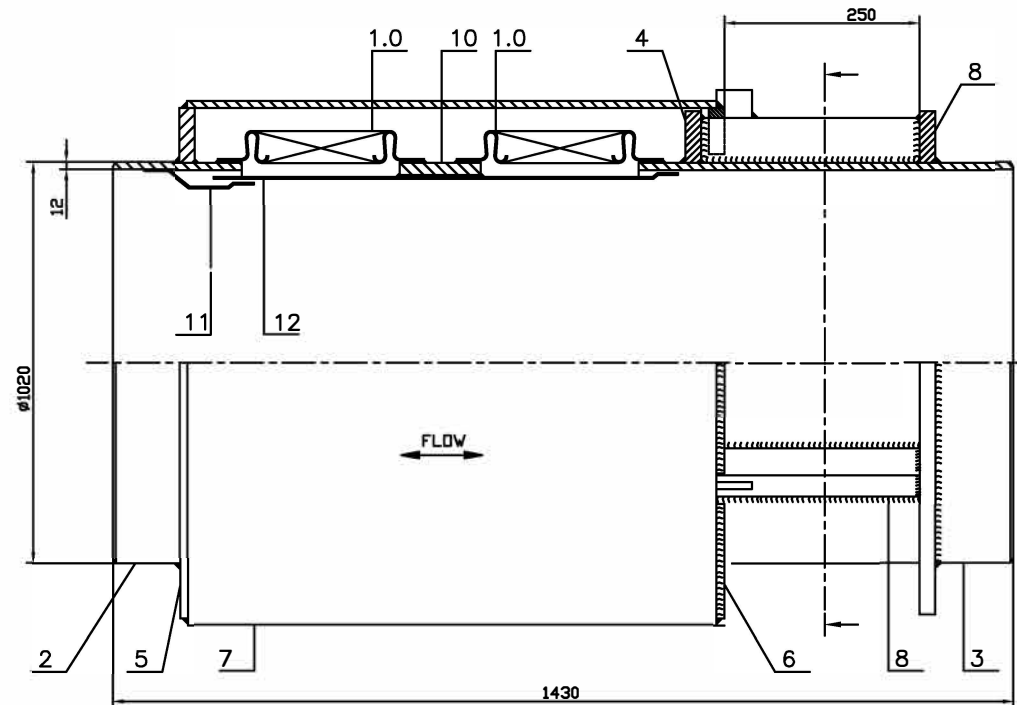


SYMBOL	DESCRIPTION	COMMISSION	DATE	PERFORMED	PROVED
CHANGES					

IF IN DOUBT ASK

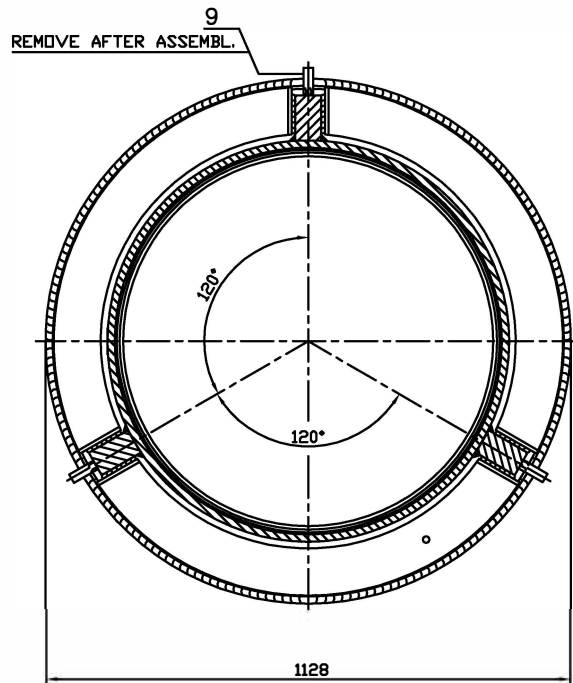


PED2014/68/EU - SEP  
MINIMAL TEMPERATURE: 263 K  
FLUID GROUP: 2  
COEFFICIENT OF WELDING JOINT: 0,7

#### NOTES:

DESIGN PRESSURE 1,6 MPa  
DESIGN TEMPERATURE 423 K  
TEST PRESSURE 2,5 MPa  
TEST TEMPERATURE 293 K  
AXIAL MOVEMENT -250 mm  
AXIAL SPRING RATE 207 N/mm  
EFFECTIVE AREA: 8626 cm<sup>2</sup>  
SURFACE PROTECTION: INSIDE - WURTH-ANTICORROSION PROTECTION  
OUTSIDE - PRIMER COATING (REZISTOL E-ZP MIX 60µm)  
MARKING IN ACCORDANCE WITH: T.U.200-1  
FREE DIMENSIONS TOLERANCES IN ACCORDANCE WITH EN ISO 2768-c

1	SLEEVE	12	1.0425			
1	SLEEVE	11	1.4541			
1	MIDDLE PIPE	10	1.0345			
3	STIFFENER	9	CS			
3	GUIDE	8	1.0038			
1	PROTECTION PIPE	7	1.0038			
3	SEGMENTED LIMITER	6	1.0038			
2	RING-2	5	1.0038			
1	RING-1	4	1.0038			
1	PIPE END-2	3	1.0345			
1	PIPE END-1	2	1.0345			
1	BELLOWS SET	1.0	1.4541			
QTY	DESCRIPTION	ITEM	DRAWING NO.	MATERIAL	MATERIAL MEASURE	STANDARD m(kg)

QTY	IT	PROJ. ENGR.	DATE	NAME	SIGN	 <b>DURO ĐAKOVIĆ</b> KOMPENZATORI d.o.o. PROIZVODNJA I USLUGE 35000 Slavonski Brod, Ulica 106. brigade ZNG 62, HRVATSKA	DWG NUMBER:	
		CONSTR.	5.12.2024.					
		DRAW						
		CHECKED						
		PROVED						
QTY	IT	SCALE:	NAME:				IR-854-2	
		%	AR16/1000/250/UR/3					
		FORMAT A3						