



**Poseidon URO Guide Wire**

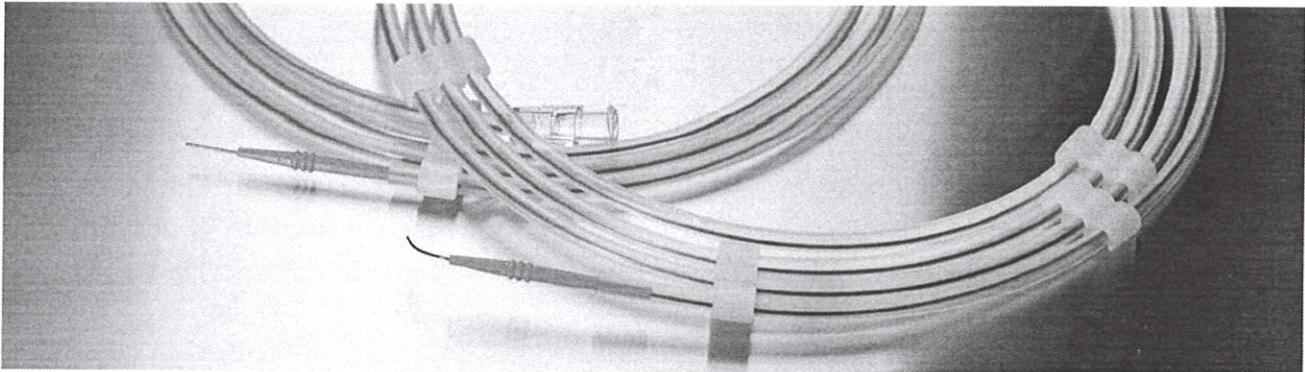

*7poz*



**Dimensions**

- Ø 0.018" / 0.46 mm
- Ø 0.025" / 0.64 mm
- Ø 0.032" / 0.82 mm
- Ø 0.035" / 0.89 mm
- Ø 0.038" / 0.97 mm

**Length**

30 – 260 cm

**Surface**

Hydrophilic coated - Black

*Hydrofilinis padengimas*

**Distal tip form**

- Straight
- Reshapable
- Angled

**Shaft stiffness**

- Standard
- Stiff
- (Stiff not available in dim: 0.018")*

**Tip stiffness**

- Floppy
- Soft
- Standard

**Speciality Guide Wire:**

**Double Ended Flexible Tip**

One end angled standard tip,  
other end straight soft tip.  
Stiff shaft stiffness.  
Available dimension 0.035",  
length 150 and 180 cm.

**Customised products on request**

**Description of item code**

URO-HY-N-S/R/A-ST/SO/F-0xx-D/H-L  
(Example: URO-HY-N-A-ST-035-D-150)

URO	Poseidon URO Guide Wire
DE	Double ended
HY	Hydrophilic coating
N	Nitinol core
S	Straight tip
R	Reshapable tip
A	Angled tip
F	Floppy tip stiffness
SO	Soft tip stiffness
ST	Standard tip stiffness
0xx	Diameter of the guide wire <b>018:</b> 0.018" (0.46 mm) <b>025:</b> 0.025" (0.64 mm) <b>032:</b> 0.032" (0.82 mm) <b>035:</b> 0.035" (0.89 mm) <b>038:</b> 0.038" (0.97 mm)
D	Standard shaft
H	Stiff shaft
L	Length of the guide wire ■ 30 - 260 cm

**KOPIJA TIKRA**      **VERTIMAS TIKRAS**  
 Direktorė  
 Vestina Strakšytė


*Polipektominė kalpa*  
**Polypectomy snares**

Tissue-conserving removal of polyps



**HF ablation**

- Easy capturing of polyps that are difficult to reach
- Controlled and continuously variable incision thanks to dimensionally stable and bending-resistant multifilament snare wire
- Integrated ergonomic handle for comfortable use
- Olympus HF connection
- Individually sterile packed

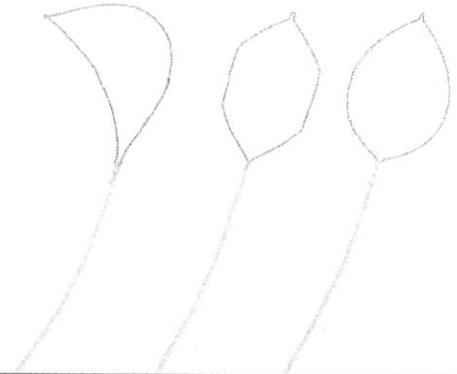

Catheter outer diameter	Working length <i>Ilgis</i>	<i>Atsidarymas</i>		Pieces per box	Product code		
		Open size	Cutting wire diameter		Sickle	Hexagonal	Oval <i>Ovali</i>
For gastroscopes and colonoscopes with working channels from 2.6 mm							
2.4 mm	230 cm	10 mm	0.4 mm	10	CRE-DS-23-10-230	HEX-DS-23-10-230	OVA-DS-23-10-230
2.4 mm	230 cm	15 mm	0.4 mm	10	CRE-DS-23-15-230	HEX-DS-23-15-230	OVA-DS-23-15-230
2.4 mm	230 cm	20 mm	0.4 mm	10	CRE-DS-23-20-230	HEX-DS-23-20-230	OVA-DS-23-20-230
<u>2.4 mm</u>	<u>230 cm</u>	<u>25 mm</u>	0.4 mm	10	CRE-DS-23-25-230	HEXDS-23-25-230	<u>OVA-DS-23-25-230</u> <i>29.</i>
2.4 mm	230 cm	30 mm	0.4 mm	10	CRE-DS-23-30-230	HEX-DS-23-30-230	OVA-DS-23-30-230
2.4 mm	230 cm	35 mm	0.4 mm	10	CRE-DS-23-35-230	HEX-DS-23-35-230	OVA-DS-23-35-230
2.4 mm	230 cm	50 mm	0.4 mm	10	-	-	OVA-DS-23-50-230

*Tinka 2.8 mm kanalui*

**VERTIMAS TIKRAS**

**KOPIJA TIKRA**

Direktorė  
**Vestina Strakšytė**