



BLUSODA

	BLUSODA 30 FIZZ	BLUSODA 45 FIZZ
Cooling capacity (l/h)	30	45
Max continuous supply (l)	6	12
Cold water temperature*	5 - 12 °C	
Pump	Professional membrane carbonation pump	
Cooling technology	Aluminum fusion block - stainless steel coil	
Condensation	Forced ventilation	
Refrigerant gas	R290	
Adjustable thermostat	Yes	
Supply	230 V - 50 Hz	
Compressor power	1/8 HP	1/5 HP
Absorbed power	230 W - 1 A	300 W - 1,3 A
Working room temperature	Min 5°C - Max 35°C	
Inlet water pipe	Ø5/16" (8 mm)	
Inlet CO ₂ pipe	Ø5/16" (8 mm)	
Dispensing area height (mm)	276	329
Typology	Countertop	
Net weight (kg)	28	31
Gross weight (kg)	31	35
Dimensions W x D x H (mm)	261 x 499 x 418	318 x 499 x 470
Packaging dimensions (mm)	310 x 540 x 470	390 x 590 x 540
Dispensing options	Cold still water, cold sparkling water and room temperature water	
Materials	Parts in robust stainless steel	
Push buttons	Stainless steel push buttons	

OTHER CHARACTERISTICS

Safety inlet valve included.

OPTIONAL

Water pressure reducer


CO₂ pressure reducer

CO₂ cylinder inside the machine

Filters Activated carbon filter (inside) + UVC OUT (inside)

Cabinet BLUSODA CABINET in stainless steel

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C

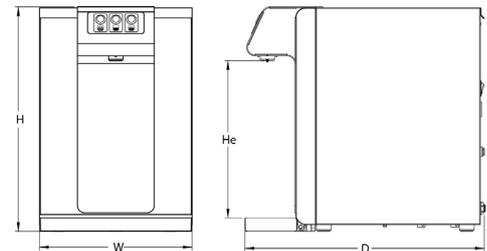

CERTIFICATIONS

30
l/h45
l/hstainless
STEEL

I.T.

DRY
COOLINGGAS
R290

fizz