


## without trocar

### Redon drains (PVC) without trocar

Redon drains are suitable for use with high-vacuum systems and low-vacuum systems for postoperative wound drainage.

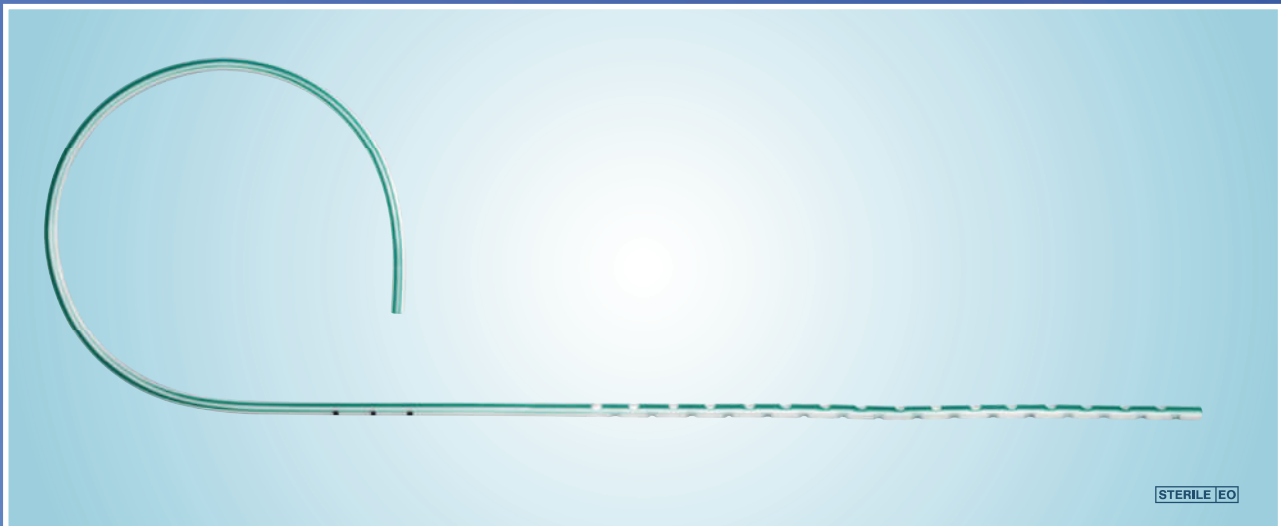

#### Product features:

- Made of soft, flexible polyvinyl chloride (PVC)
- With radiopaque stripe
- Implant tested in accordance with USP XXIII
- Alternating perforation to avoid ingrowth of tissue
- Rounded drainage openings for removal of secretion
- Length markings allow simple repositioning


Ch.	Length	PU/SU	REF
6	500 mm	100/300	21860
8	500 mm	100/300	21861
10	500 mm	100/300	21862
12	500 mm	100/300	21863
14	500 mm	100/300	21864
16	500 mm	100/300	21865
18	500 mm	100/300	21866

Ch.	Length	PU/SU	REF
6	800 mm	100/300	21880
8	800 mm	100/300	21881
10	800 mm	100/300	21882
12	800 mm	100/300	21883
14	800 mm	100/300	21884
16	800 mm	100/300	21885
18	800 mm	100/300	21886

Primed Halberstadt Medizintechnik GmbH  
 Straße des 20. Juli 1  
 38820 Halberstadt - Germany



### Redon drenas (PVC) be trokaro

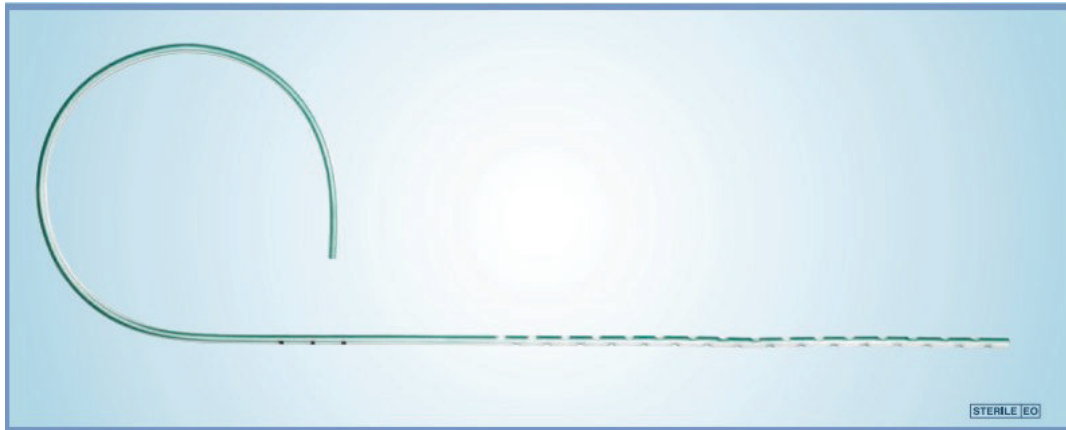

Redon drenai tinkami naudoti su aukšto vakuumo ir žemo vakuumo sistemomis pooperaciniam, žaizdų drenažui

- Pagaminti iš minkšto, lankstaus polivinilchlorido (PVC)
- Su rentgeno-kontrastine juosta
- Implantai išbandyti pagal USP XXIII
- Pakaitinės **perforacijos** leidžia išvengti audinių įaugimo.
- Ovalios drenavimo angos sekrecijų pašalinimui
- Ilgio atžymos leidžia lengvai keisti poziciją
- Sterilizuotas EO

CH	Ilgis	PU/SU	REF
6	500 mm	100/300	24850/ 21860
8	500 mm	100/300	24851/ 21861
10	500 mm	100/300	24852/ 21862
12	500 mm	100/300	24853/ 21863
<b>14</b>	<b>500 mm</b>	<b>100/300</b>	<b>24854/ 21864</b>
<b>16</b>	<b>500 mm</b>	<b>100/300</b>	<b>24855/ 21865</b>
<b>18</b>	<b>500 mm</b>	<b>100/300</b>	<b>24856/ 21866</b>

CH	Ilgis	PU/SU	REF
6	800 mm	100/300	24860/ 21880
8	800 mm	100/300	24861/ 21881
10	800 mm	100/300	24862/ 21882
12	800 mm	100/300	24863/ 21883
14	800 mm	100/300	24864/ 21884
16	800 mm	100/300	24865/ 21885
18	800 mm	100/300	24866/ 21886



### PRI-LOW-VAC® 500 ml complete set

- Redon bellows with connecting tube, Redon drain (PVC) with trocar

Ch.	Drain length	PU/SU	REF
10	800 mm	35/ 35	<b>21605</b>
12	800 mm	35/ 35	<b>21601</b>
14	800 mm	35/ 35	<b>21599</b>



### PRI-LOW-VAC® 500 ml OR system P.d. 20

- Redon bellows with connecting tube

PU/SU	REF
35/ 35	<b>21631</b>

vakuuminis plastikinis

gofruotas indas



### PRI-LOW-VAC® 500 ml ward system (replacement bellows)

- Redon bellows with closed lid attachment

PU/SU	REF
35/ 35	<b>21621</b>

## **Žemo vakuumo Redon, operacinio lauko sistema su universalium konektoriumi, CH 6-18**



### **Žemo vakuumo sistema kasdieniam naudojimui operacinėse**

Produkto savybės:

- pradedant 120 mbar vakuumu;
- talpa: 20, 50, 200, 250, 500 ml;
- jungiamasis vamzdelis, ilgis: 125 cm;
- universalus pakopinis konektorius saugiam sujungimui, CH 6-18;
- rinkinys su drene ir pagrindine adata;
- atskirai supakuoti, sterilūs;
- galimi specialūs modeliai;