







STRUCTURE AND ORDERING INFORMATION

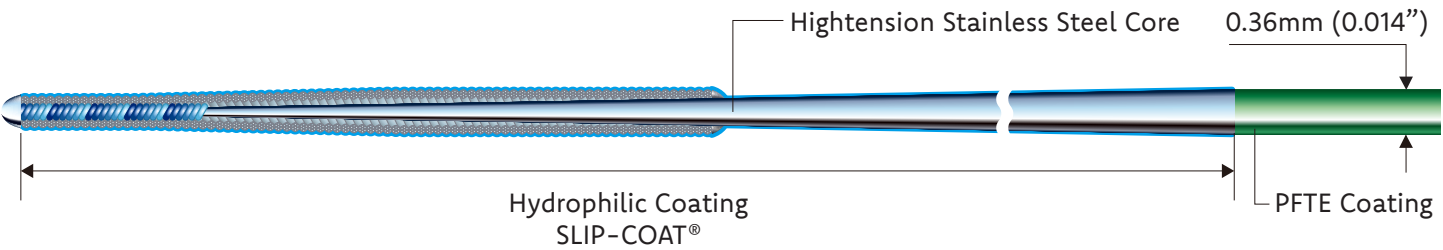

ne mažiau 15 cm lankstus galas galiukas 3-15 cm rentgenokontrastiškas

ORDERING INFO									
PRODUCT	CATALOG NO.	DIAMETER	COATING	USABLE LENGTH	COIL LENGTH	RADIOPAQUE LENGTH	TIP SHAPE	LABEL COLOR	CLIP COLOR
	AH14R019P	0.36/0.27 mm (0.014/0.011 inch)	Hydrophilic Coating (SLIP-COAT®) 40cm	190cm	15cm	15cm	1mm Pre-shape		
	AH14R020P	0.36/0.30 mm (0.014/0.012 inch)	Hydrophilic Coating (SLIP-COAT®) 40cm	190cm	15cm	15cm	1mm Pre-shape		
	AH14R021P	0.36/0.30 mm (0.014/0.012 inch)	Hydrophilic Coating (SLIP-COAT®) 40cm	190cm	15cm	15cm	1mm Pre-shape		

turi būti 1 mm J užlenkimo modelis

ASAHI Gaia Next®
PTCA GUIDE WIRE

LEADING TO THE NEXT






ASAHI Gaia Next[®]


PTCA GUIDE WIRE

NEW EVOLUTION IN CTO PCI



ACT ONE[®]


By introducing ACT ONE, ASAHI Gaia Next brings tip durability, flexibility and torque response to a new level



Micro-cone Tip


Fine tip for easy engagement with the lesion while maintaining tip flexibility

turi būti nusmailinto ir suldytų apvijų galiuko modelis



1mm Pre-shape



Pre-shaping during production designed for navigation and precise control



XTRAND Coil

Evolution of spring coil for increased anti-trapping power and improved maneuverability inside complex lesions

galiuko kietumas turi apimti šį intervalą: nuo 0,3 g iki 6,0 g

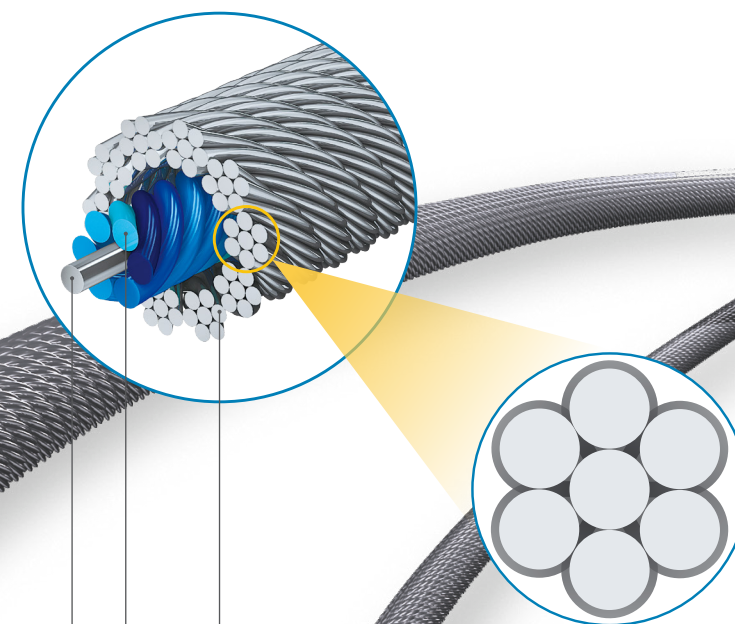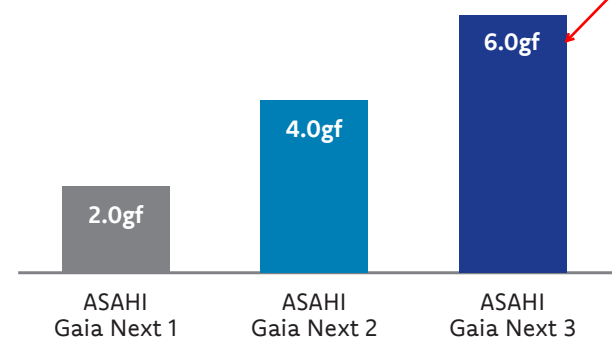

Core Wire

ACT ONE



XTRAND Coil

vielos galiukas supintas iš ne mažiau, nei 90 vnt. mikro vielų ypatingam lankstumui ir patvarumui suderinti (XTRAND analogiška technologija);

XTRAND Coil – innovative ASAHI[®] technology

XTRAND Coil is a hollow outer coil made from several ropes of wire designed for:

- Flexibility for better maneuverability inside severe and complex lesions
- Significantly higher tensile strength than conventional coils made using a single wire
- Mitigation of coil stretching and damage to improve overall safety

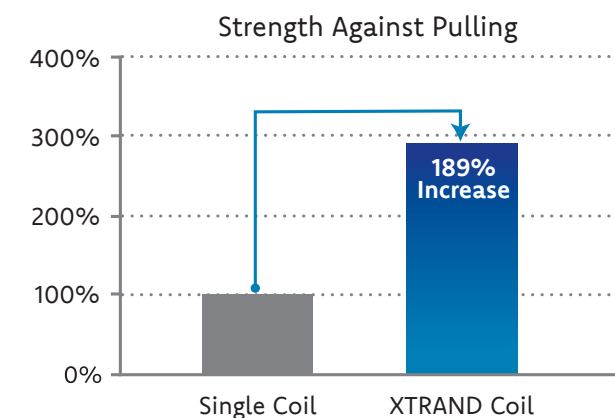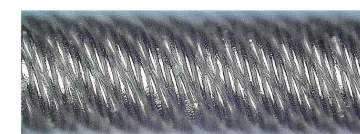

*All the data were obtained by company standardized test, which may differ from industry standardized tests.

*All the data do not guarantee that all devices have exactly the same performance with the samples used for tests.