

DC Power Supply

Key features



- Wide temp range -25 to +71°C
- DIN rail mounting
- Screw terminals
- AC input 100 to 240 V
- DC out 15V or 24V

Description

The TDK Lambda PSU is a AC/DC PSU series recommended for SMW RF over Fiber products and available from stock. As standard it's made for mounting indoors on a DIN rail.

Full technical details available on request.

For outdoor rated (IP 67) PSU, please contact us.

- Recommended for use with:
- Dual DC inserter (for Fiber LNB)
 - Bias Tee with pigtail DC insertion
 - 10 MHz ref. oscillator with pigtail for DC
 - 10 MHz Recovery osc. with pigtail for DC
 - Fiber LNB
 - VersaLink (RF over Fiber) Transmitter and Receiver
 - LNBLink (RF over fiber) Transmitter
 - Quattro Fiber Receiver
 - Quadlink (RF over Fiber) Transmitter and Receiver


DC Power Supply

Technical specifications

	MODEL	DSP 60-15	DSP 60-24
GENERAL	Ripple and noise (20 MHz BW)	50 mV	
	Mounting	DIN rail	
	Connections	Screw terminals (AC and DC)	
	Dimensions	71 x 91 x 56 mm	
	Weight	250 g	
	Operating Temperature	-25 to +71°C, -13 to 160° F	
	Storage Temperature	-25 to +85° C, -13 to 185° F	
	Insulation class	Class II Double insulation	
INPUT	Input voltage	100 - 240 VAC	
	Input frequency	47 - 63 Hz	
	Input connection	Screw terminal	
OUTPUT	Output voltage	+15 VDC	24 VDC, Note that DSP 60-24 is NOT for use with SMW C-Band or Multiband Ku-band LNBs
	Output power	60 W nom., derating 50% min., 30 W max. continuously	
	Output connection	Screw terminal	

DC Power Supply

Technical Drawing

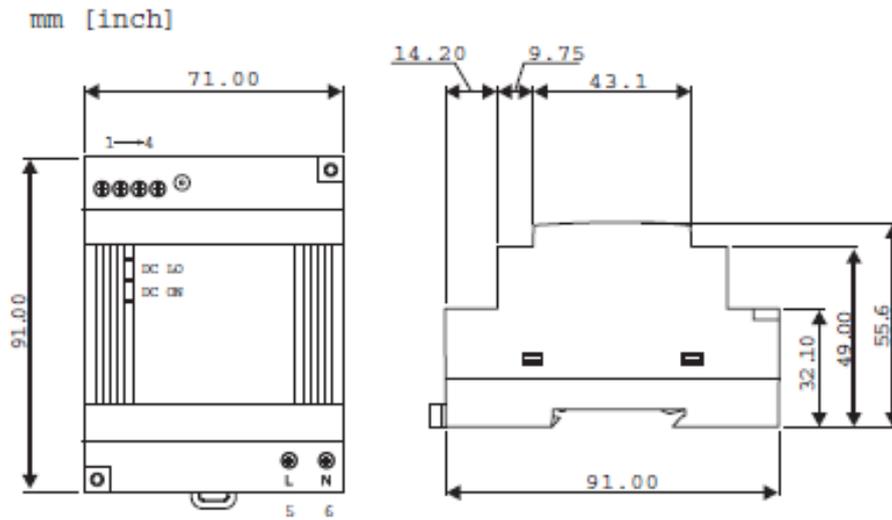

Professional Satcom Frequency Converters & Components. All products are fully CE and RoHS compliant and every unit includes full documentation of performance tests and quality control. Please contact sales@smw.se to configure or customize the unit to your needs. Visit smw.se or scan QR code to see our full product range and request a quote.

