


901XC

The **Komatsu 901XC** is a thinning harvester with extreme stability and good reach. Its eight wheels reduce ground damage on soft forest floors and deliver excellent manoeuvrability in steep terrain.

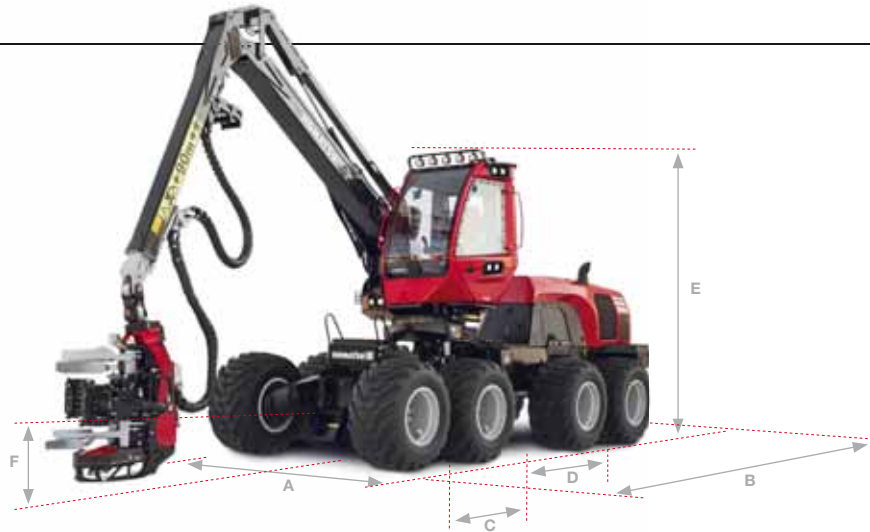

Dimensions (eight-wheeler with 600 mm tyres)

A. Width	2,776 mm
B. Length, total	7,705 mm
C. Length, front axle to articulated joint	1,850 mm
D. Length, articulated joint to rear axle	2,100 mm
E. Transport height, with tire compression	3,810 mm
F. Ground clearance	650 mm

NOTE: Stated dimensions are nominal and may vary slightly depending on production tolerances and choice of equipment.

Weight

Approximate weight:	20,210 kg
---------------------	-----------

Engine

Engine type:	AGCO POWER, 6-cylinder diesel engine with turbo and intercooler. Conforms to the requirements of EU Stage V (Europe), Tier 4F (North America) and Stage II (other countries). Stage V: 66 LFTN-D5, Tier 4F: 66 LFTN-D4, Stage II: 66 LFEN-A2
Engine displacement:	6.6 l
Power, max.:	Stage V and Tier 4F: 170 kW DIN at 1,900 rpm, Stage II: 165 kW DIN at 1,900 rpm
Torque:	Stage V, Tier 4F and Stage II: 950 Nm at 1,500 rpm
AdBlue® tank:	42 l
Fuel tank:	approx. 415 l

Power transmission

	Hydrostatic-mechanical, controlled via MaxiXT. Transfer gearbox with 2 positions. Disengageable front-wheel drive.
Differential locks:	Front and rear axle. Mechanical electro-hydraulic control.
Driving speed:	0–approx. 22 km/h
Tractive force:	184 kN

Hydraulic system

	Dual-circuit load-sensing system with variable piston pumps.
Flow:	400 l/min at 1,600 rpm
System pressure:	255–280 bar
Hydraulic oil tank:	approx. 220 l
Other:	Pressure filter for hydrostatic circuit. Return oil filter for hydrostatic and working hydraulics. Hydraulic oil level alarm.

Frame/Axles

Axle, front:	Geared bogie, "hi clearance" type with portal gears housed in the rims. Differential with mechanical differential lock.
Axle, rear:	Suspended geared bogie, "hi clearance" type with portal gears housed in the rims. Differential with mechanical differential lock. Hydraulic stabiliser.

Brake system

	Fully-hydraulic multi-disc brakes. Brake pressure accumulators charged via automatic hydraulic accumulator charging valve.
Driving brake:	Four multi-disc brakes in oil bath acting on front and rear axles.
Working brake:	Same as driving brake. Automatically engaged when working.
Parking brake:	Spring-action brake with electro-hydraulic control. Emergency brake.
Braking performance:	Conforms to ISO 11169 and VVFS 2003:27

Crane

Crane:	200H
Reach:	10 m/11 m
Lifting torque, gross:	198 kNm
Slewing torque, gross:	43 kNm
Head:	S82/S92/C93/C124

Steering

	Hydraulic articulated joint with two dual-acting hydraulic cylinders.
Joystick steering:	Load-sensing (LS) proportional steering from crane controls/rocker.
Electric steering:	Finger-controlled miniature steering wheel on right-hand panel.
Steering angle:	±40°
Ex. of other equipment:	Electrical limit damping.

901XC

Head	Komatsu S82	Komatsu S92	Komatsu C93	Komatsu C124	
Weight, from:	829 kg	951 kg	970 kg	1,210 kg	
Felling/cutting diameter:	580 mm	630 mm	600 mm	650 mm	
Feed speed:	0-5 m/s	0-5 m/s	0-5 m/s	0-5 m/s	
Feed force, gross:	20.3 kN	26.1 kN	20.1/25.3 kN*	23.7/28.3 kN*	
Forward knives, max. opening:	517 mm	535 mm	600 mm	625 mm	
Feed rollers, max. opening:	460 mm	519 mm	550 mm	670 mm	*depends on engine

Electrical system

Voltage:	24 V
Battery capacity:	2 x 180 Ah
Alternator:	2 x 100 A

Lighting

Working lights:	13 lights on cab, 2 lights on crane, 3 lights on crane base, all halogen, and 2 lights on the engine hood grille, LED
Service lighting:	LED lights in service compartments
Ex. of other equipment:	Working lights (LED). 9 lights on cab, 2 lights on crane, 3 lights on crane base and 2 lights on engine hood grille. Variations of extra working lights (LED). 2 roof-mounted lights on cab (halogen)

Ergonomics

	Levelling for good posture. Cab coupled to swing axle. Crane and cab on horizontal, rotating platform. Hydraulic stabilisation when manoeuvring.
Horizontal levelling:	Longitudinal 22°/20° and lateral 17°
Rotation:	±180°
Ex. of other equipment:	Autolev – fully-automatic cab and crane levelling. Crane damping. Cab suspension. Slewing damping.

Cab

	Tested in accordance with applicable ISO standard. Levelling. Thermal and acoustic insulation.
Seat:	Several alternative seat options. Ergonomically designed with headrest, armrests, hand controllers and waist safety belt. Depending on seat selection, different options are available for individual adjustment of the seat cushion, backrest and lumbar support. Also available as a rotating seat.
Windows:	Polycarbonate windows throughout.
Heating/ventilation:	Combined heating and cooling unit or climate control. Filtered intake air via allergy filter.
Noise level:	As per ISO standard
Vibrations:	As per ISO standard
Other:	Manual tilt. Windscreen wipers and washers on windscreen.
Ex. of other equipment:	- Swivel seat - Smart radio/DAB radio - MediaZone - Electrically-controlled platform under cab

MaxiXT control and information system

- Fully integrated machine control system, CAN-based with head, crane, engine and transmission intelligence for optimum performance and fuel consumption. Eco-driving function.
- Effective head control system. Features include multi-tree handling, sequence control, anti-slip function, bar rescue, automatic tilt at tree end, diameter-dependent clamping pressure and more.
- Value-optimised or length-optimised bucking with high timber value optimisation.
- Easy-to-use operator interface. High-performance PC with Windows operating system, SSD hard drive, touchscreen selection and data backup function. Antivirus software.
- Comfort Controls. Ergonomic joysticks of various types with extensive functionality.

Examples of other equipment

- Sprinkler system. Fully automatic water-based fire extinguishing. Conforms to SBF 127.
- Hand-held dry powder fire extinguishers 2 x 6 kg (ABE-3), fitted externally.
- Hand-held dry powder fire extinguisher 2 kg (F2GM), fitted in cab.
- Hand-held dry powder fire extinguishers 2 x 9 kg, fitted externally.
- Diesel heater 9.1 kW incl. timer and hydraulic oil heater.
- Extra water separator, diesel.
- Stump treatment equipment.
- Biodegradable hydraulic oil.
- Mini joysticks with sequence control.
- Tracks, chains.
- Service ladders.
- Toolbox with tools.
- Reversing camera as standard (in EEA countries in compliance with applicable EU Directive).
- Platform at side of cab and ladder on left side of rear frame as standard (in EEA countries in compliance with applicable EU Directive).
- Central lubrication.
- Electric diesel and oil filling.

Notes

The specifications describe possible equipment, not which equipment is standard or optional. Standard and optional equipment varies between countries. Your sales representative has an up-to-date list of what is included. Weights are based on the equipment specified in the basic specification. Specifications and designs are subject to alteration without prior notice.