

# HI-TORQUE PROGRESS™

Guide Wires

A CTO INDICATED GUIDE WIRE

FIVE UNIQUE WIRES DESIGNED  
FOR A VARIETY OF CHRONIC  
OCCLUSION TECHNIQUES

## PARABOLIC CORE GRIND

for vessel tracking and steering

## HYDROPHILIC COATED INTERMEDIATE POLYMER SLEEVE

for lubricity

## EXPOSED TIP COIL

for tactile feel

## TAPERED TIP (FOR 140T AND 200T MODELS)


for high penetration power

Data on file at Abbott.

**Information contained herein for DISTRIBUTION outside the U.S. ONLY.  
Check the regulatory status of the device in areas where CE marking is not the regulation in force.**

©2021 Abbott. All rights reserved. MAT-2102006 v1.0

LEADING THE WAY IN GUIDE WIRE TECHNOLOGY

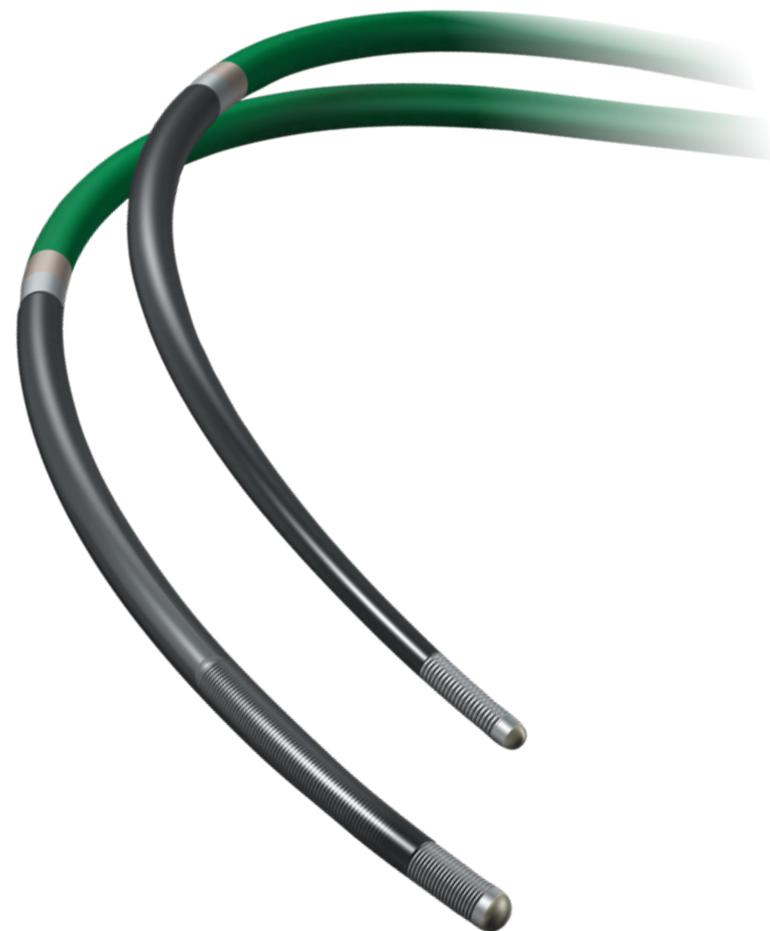

# HI-TORQUE PROGRESS™ GUIDE WIRE ORDERING INFORMATION



## HI-TORQUE PROGRESS™ 40

PRODUCT DESCRIPTION	PART NUMBER	WIRE LENGTH (cm)	TIP SHAPE	RADIOPAQUE TIP LENGTH (cm)	TIP LOAD* (g)	TIP DIAMETER (in)	PENETRATION POWER* (kg/in <sup>2</sup> )
HI-TORQUE PROGRESS™ 40	1011836	190	Straight	3	5.0	0.012	44
HI-TORQUE PROGRESS™ 40	1011837	300	Straight	3	5.0	0.012	44

## HI-TORQUE PROGRESS™ 80

PRODUCT DESCRIPTION	PART NUMBER	WIRE LENGTH (cm)	TIP SHAPE	RADIOPAQUE TIP LENGTH (cm)	TIP LOAD* (g)	TIP DIAMETER (in)	PENETRATION POWER* (kg/in <sup>2</sup> )
HI-TORQUE PROGRESS™ 80	1011838	190	Straight	3	11.5	0.012	102
HI-TORQUE PROGRESS™ 80	1011839	300	Straight	3	11.5	0.012	102

## HI-TORQUE PROGRESS™ 120

PRODUCT DESCRIPTION	PART NUMBER	WIRE LENGTH (cm)	TIP SHAPE	RADIOPAQUE TIP LENGTH (cm)	TIP LOAD* (g)	TIP DIAMETER (in)	PENETRATION POWER* (kg/in <sup>2</sup> )
HI-TORQUE PROGRESS™ 120	1011844	190	Straight	3	17.5	0.012	154
HI-TORQUE PROGRESS™ 120	1011845	300	Straight	3	17.5	0.012	154

## HI-TORQUE PROGRESS™ 140T

PRODUCT DESCRIPTION	PART NUMBER	WIRE LENGTH (cm)	TIP SHAPE	RADIOPAQUE TIP LENGTH (cm)	TIP LOAD* (g)	TIP DIAMETER (in)	PENETRATION POWER* (kg/in <sup>2</sup> )
HI-TORQUE PROGRESS™ 140T	1011840	190	Straight	3	15.5	0.0105	178
HI-TORQUE PROGRESS™ 140T	1011841	300	Straight	3	15.5	0.0105	178

## HI-TORQUE PROGRESS™ 200T

PRODUCT DESCRIPTION	PART NUMBER	WIRE LENGTH (cm)	TIP SHAPE	RADIOPAQUE TIP LENGTH (cm)	TIP LOAD* (g)	TIP DIAMETER (in)	PENETRATION POWER* (kg/in <sup>2</sup> )
HI-TORQUE PROGRESS™ 200T	1011842	190	Straight	3	13.5	0.009	212
HI-TORQUE PROGRESS™ 200T	1011843	300	Straight	3	13.5	0.009	212

\*Tests performed by and data on file at Abbott.

CAUTION: This product is intended for use by or under the direction of a physician. Prior to use, reference the Instructions for Use, inside the product carton (when available) or at [vascular.eifu.abbott](http://vascular.eifu.abbott) or at [medical.abbott/manuals](http://medical.abbott/manuals) for more detailed information on Indications, Contraindications, Warnings, Precautions and Adverse Events. This material is intended for use with healthcare professionals only.

**Information contained herein for DISTRIBUTION outside the U.S. ONLY. Check the regulatory status of the device in areas where CE marking is not the regulation in force.**

Illustrations are artist's representations only and should not be considered as engineering drawings or photographs.

Data on file at Abbott.

### Abbott International BVBA

Park Lane, Culliganlaan 2B, 1831 Diegem, Belgium, Tel: 32.2.714.14.11

™ Indicates a trademark of the Abbott Group of Companies.

[www.cardiovascular.abbott](http://www.cardiovascular.abbott)

©2021 Abbott. All rights reserved. MAT-2102006 v1.0