


Pocket Filter KIS



Filter Properties

Industrial and domestic conditioning and ventilation applications. Pre-filtration and separation of coarse, medium and fine particulates.

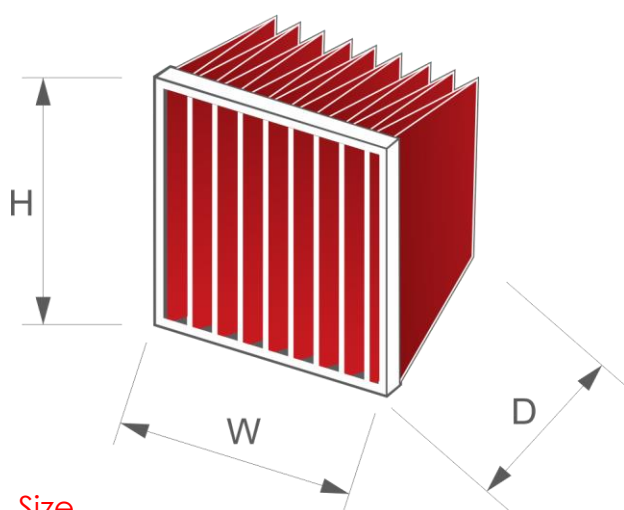

Size

Dimension W*H*D/pocket number 592*287*360/6 mm

Technical data

Filter medium composition	Synthetic non-woven	
Frame material	ZN coated metal	
Pocket separators	ultrasonic welted nonwoven	
Pocket fastening	welded wire inner frame	
Gasket	Optional	
Regeneration	No	
Max. Operating temperature	70	°C
Max. Relative humidity	90	%

Performance data

Nominal flow	1650	m³/h
Initial pressure drop	35	Pa
Final recommended pressure drop	250	Pa
Classification (ISO 16890)	ePM Coarse	60%
Classification (EN 779:2012)	G4	

The data sheet is based on relative performance calculations data
We reserve the right to make changes without prior notice

TG filter is a product of "UAB Technogaja"
Address: Sėmėnos g.52A,
LT-46164 Patamulšėlis, Kauno raj., Lithuania
www.tgfilter.eu; info@technogaja.lt



Need something custom made?
Don't hesitate - contact us let us know what you need