

1, 24, 30 perigos

RyujiTM Plus


PTCA Semi compliant balloon catheter



Rapid exchange (Rx)

RyujiTM Plus is a high performance semi compliant balloon catheter utilizing the latest technology developed by Terumo.

It combines innovative shaft construction, new balloon design, with low profile for improved crossability while maintaining the trackability.

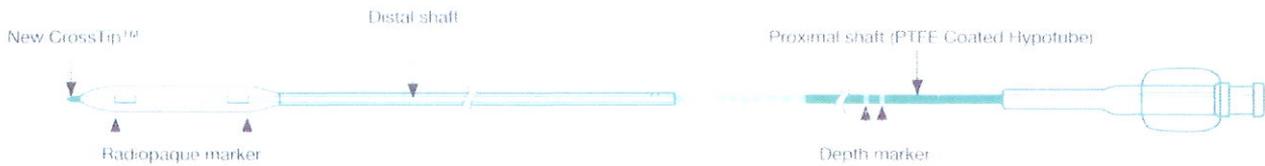

Specifications

| Order Number | Balloon Diameter | Balloon Length (mm) | Shaft outer diameter / Intershaft | PSI |
|--------------|------------------|---------------------|-----------------------------------|-------------------|
| DC-RH1210EH | 1.25 mm | 10 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH1215EH | 1.25 mm | 15 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH1515EH | 1.50 mm | 15 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH1520EH | 1.50 mm | 20 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2015EHW | 2.00 mm | 15 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2020EHW | 2.00 mm | 20 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2030EHW | 2.00 mm | 30 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2040EHW | 2.00 mm | 40 mm | 2.4 / 2.0 Fr (0.80 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2210EHW | 2.25 mm | 10 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2215EHW | 2.25 mm | 15 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2220EHW | 2.25 mm | 20 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2230EHW | 2.25 mm | 30 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2240EHW | 2.25 mm | 40 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2510EHW | 2.50 mm | 10 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2515EHW | 2.50 mm | 15 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2520EHW | 2.50 mm | 20 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2530EHW | 2.50 mm | 30 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2540EHW | 2.50 mm | 40 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2710EHW | 2.75 mm | 10 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2715EHW | 2.75 mm | 15 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2720EHW | 2.75 mm | 20 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2730EHW | 2.75 mm | 30 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH2740EHW | 2.75 mm | 40 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH3010EHW | 3.00 mm | 10 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH3015EHW | 3.00 mm | 15 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH3020EHW | 3.00 mm | 20 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH3030EHW | 3.00 mm | 30 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH3040EHW | 3.00 mm | 40 mm | 2.5 / 2.0 Fr (0.84 / 0.67 mm) | 14 atm / 1419 kPa |
| DC-RH3510EHW | 3.50 mm | 10 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH3515EHW | 3.50 mm | 15 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH3520EHW | 3.50 mm | 20 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH3530EHW | 3.50 mm | 30 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH3540EHW | 3.50 mm | 40 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH4010EHW | 4.00 mm | 10 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH4015EHW | 4.00 mm | 15 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH4020EHW | 4.00 mm | 20 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH4030EHW | 4.00 mm | 30 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |
| DC-RH4040EHW | 4.00 mm | 40 mm | 2.6 / 2.0 Fr (0.87 / 0.67 mm) | 12 atm / 1216 kPa |

Unit per box: 1

Usable length: 145 cm
 Entry profile: 0.42 mm & 0.46 mm for 1.25 mm x 10 mm
 Nominal pressure: 6 atm / 608 kPa


RyujiTM Plus

PTCA Semi compliant balloon catheter



Over The Wire (OTW)

RyujiTM Plus is a high performance semi compliant balloon catheter utilizing the latest technology developed by Terumo.
 RyujiTM Plus is also available in OTW platform and includes broad selection of lengths, diameters and two different shaft lengths

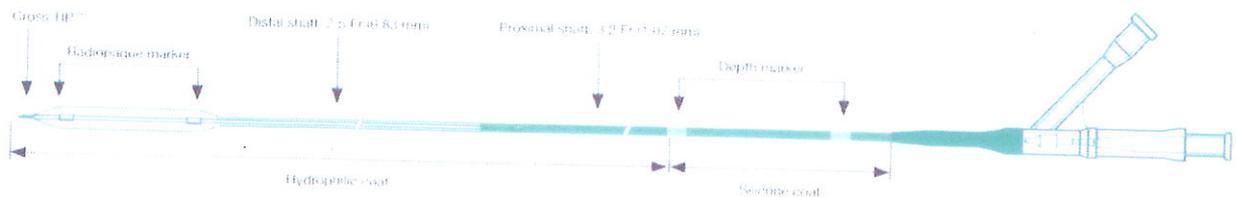

Specifications

| Code product | Balloon diameter | Balloon length | Shaft length |
|--------------|------------------|----------------|--------------|
| DC-PH1210PH | 1.25 mm | 10 mm | 135 cm |
| DC-PH1515PH | 1.50 mm | 15 mm | 135 cm |
| DC-PH2020PHW | 2.00 mm | 20 mm | 135 cm |
| DC-PH2520PHW | 2.50 mm | 20 mm | 135 cm |
| DC-PH1210LH | 1.25 mm | 10 mm | 148 cm |
| DC-PH2020LHW | 2.00 mm | 20 mm | 148 cm |
| DC-PH2520LHW | 2.50 mm | 20 mm | 148 cm |

Unit per box: 1

RRP: 14 atm / 1419 kPa
 Entry profile: 0.42 mm
 Nominal pressure: 6 atm / 608 kPa