




| Position | Qty. | Description   | Single Price     |
|----------|------|---|------------------|
|          | 1    | <p><b>Unilift CC 9</b><br/>Product No.: 96280969</p> <p>Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.<br/>The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul style="list-style-type: none"> <li>• washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level</li> <li>• cellars or buildings prone to flooding</li> <li>• draining wells</li> <li>• wells for surface water with inlets from roof gutters, pits, tunnels, etc.</li> <li>• swimming pools, ponds or fountains.</li> </ul> <p>The pumps are suitable for both stationary and portable use.<br/>They are for manual operation.<br/>The pumps allow free passage of particles up to ø10 mm.</p> <p>The motor incorporates automatic overload protection cutting out the motor in case of overload.<br/>When cooled to normal temperature, the motor restarts automatically.</p> <p><b>Technical:</b><br/>Maximum particle size: 10 mm<br/>Curve tolerance: ISO 9906 Annex A</p> <p><b>Materials:</b><br/>Pump housing: PP 15 GF<br/>Impeller: PPOm 20 GF</p> <p><b>Installation:</b><br/>Pump outlet: G 1 1/4<br/>Maximum installation depth: 10 m</p> <p><b>Liquid:</b><br/>Liquid temperature range: 0 .. 40 °C<br/>Liquid temp: 20 °C<br/>Density: 998.2 kg/m<sup>3</sup></p> <p><b>Electrical data:</b><br/>Mains frequency: 50 Hz<br/>Rated voltage: 1 x 220-240 V<br/>Rated current: 3.5 A<br/>Capacitor size - run: 8 µF/450 V<br/>Enclosure class (IEC 34-5): 68<br/>Insulation class (IEC 85): B<br/>Length of cable: 10M m<br/>Type of cable plug: SCHUKO</p> <p><b>Others:</b><br/>Net weight: 6.5 kg<br/>Gross weight: 7.1 kg<br/>Shipping volume: 0.017 m<sup>3</sup></p> | Price on request |

| Position | Qty. | Description  | Single Price     |
|----------|------|--|------------------|
|          | 1    | <p data-bbox="296 159 432 185"><b>Unilift CC 9</b></p> <div data-bbox="296 188 679 613" style="border: 1px solid black; padding: 5px;">  </div> <p data-bbox="683 584 1222 611"><b>Note! Product picture may differ from actual product</b></p> <p data-bbox="296 640 549 667">Product No.: 96280969</p> <p data-bbox="296 696 1254 752">Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.</p> <p data-bbox="296 754 1150 781">The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul data-bbox="296 784 1246 925" style="list-style-type: none"> <li>• washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level</li> <li>• cellars or buildings prone to flooding</li> <li>• draining wells</li> <li>• wells for surface water with inlets from roof gutters, pits, tunnels, etc.</li> <li>• swimming pools, ponds or fountains.</li> </ul> <p data-bbox="296 954 951 981">The pumps are suitable for both stationary and portable use.</p> <p data-bbox="296 983 632 1010">They are for manual operation.</p> <p data-bbox="296 1012 919 1039">The pumps allow free passage of particles up to ø10 mm.</p> <p data-bbox="296 1068 1219 1124">The motor incorporates automatic overload protection cutting out the motor in case of overload.</p> <p data-bbox="296 1126 1046 1153">When cooled to normal temperature, the motor restarts automatically.</p> <p data-bbox="296 1182 421 1209"><b>Technical:</b></p> <p data-bbox="296 1211 863 1267">Maximum particle size: 10 mm<br/>Curve tolerance: ISO 9906 Annex A</p> <p data-bbox="296 1296 416 1323"><b>Materials:</b></p> <p data-bbox="296 1326 807 1382">Pump housing: PP 15 GF<br/>Impeller: PPOm 20 GF</p> <p data-bbox="296 1411 437 1438"><b>Installation:</b></p> <p data-bbox="296 1440 743 1496">Pump outlet: G 1 1/4<br/>Maximum installation depth: 10 m</p> <p data-bbox="296 1525 384 1552"><b>Liquid:</b></p> <p data-bbox="296 1554 791 1644">Liquid temperature range: 0 .. 40 °C<br/>Liquid temp: 20 °C<br/>Density: 998.2 kg/m<sup>3</sup></p> <p data-bbox="296 1673 472 1700"><b>Electrical data:</b></p> <p data-bbox="296 1702 815 1933">Mains frequency: 50 Hz<br/>Rated voltage: 1 x 220-240 V<br/>Rated current: 3.5 A<br/>Capacitor size - run: 8 µF/450 V<br/>Enclosure class (IEC 34-5): 68<br/>Insulation class (IEC 85): B<br/>Length of cable: 10M m<br/>Type of cable plug: SCHUKO</p> <p data-bbox="296 1962 384 1989"><b>Others:</b></p> <p data-bbox="296 1991 767 2080">Net weight: 6.5 kg<br/>Gross weight: 7.1 kg<br/>Shipping volume: 0.017 m<sup>3</sup></p> | Price on request |


| Description                 | Value                   |
|-----------------------------|-------------------------|
| Product name:               | Unilift CC 9            |
| Product No:                 | 96280969                |
| EAN number:                 | 5700830761397           |
| Price:                      | On request              |
| <b>Technical:</b>           |                         |
| Max flow:                   | 3.89 l/s                |
| Head max:                   | 9 m                     |
| Maximum particle size:      | 10 mm                   |
| Curve tolerance:            | ISO 9906 Annex A        |
| <b>Materials:</b>           |                         |
| Pump housing:               | PP 15 GF                |
| Impeller:                   | PPOm 20 GF              |
| <b>Installation:</b>        |                         |
| Pump outlet:                | G 1 1/4                 |
| Maximum installation depth: | 10 m                    |
| <b>Liquid:</b>              |                         |
| Liquid temperature range:   | 0 .. 40 °C              |
| Liquid temp:                | 20 °C                   |
| Density:                    | 998.2 kg/m <sup>3</sup> |
| <b>Electrical data:</b>     |                         |
| Mains frequency:            | 50 Hz                   |
| Rated voltage:              | 1 x 220-240 V           |
| Rated current:              | 3.5 A                   |
| Capacitor size - run:       | 8 µF/450 V              |
| Enclosure class (IEC 34-5): | 68                      |
| Insulation class (IEC 85):  | B                       |
| Motor protec:               | YES                     |
| Length of cable:            | 10M m                   |
| Type of cable plug:         | SCHUKO                  |
| <b>Others:</b>              |                         |
| Net weight:                 | 6.5 kg                  |
| Gross weight:               | 7.1 kg                  |
| Shipping volume:            | 0.017 m <sup>3</sup>    |

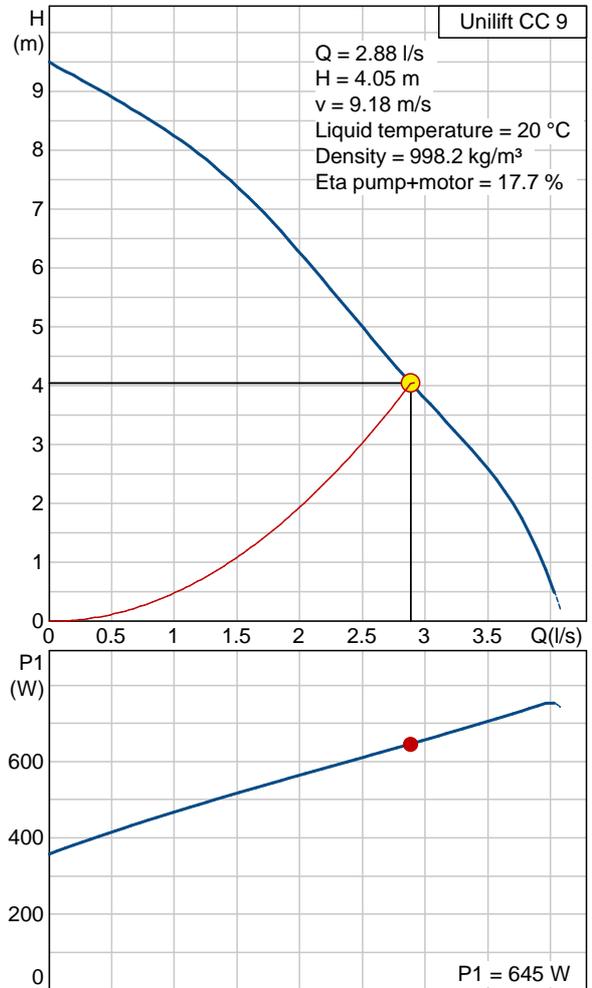


# 96280969 Unilift CC 9 50 Hz

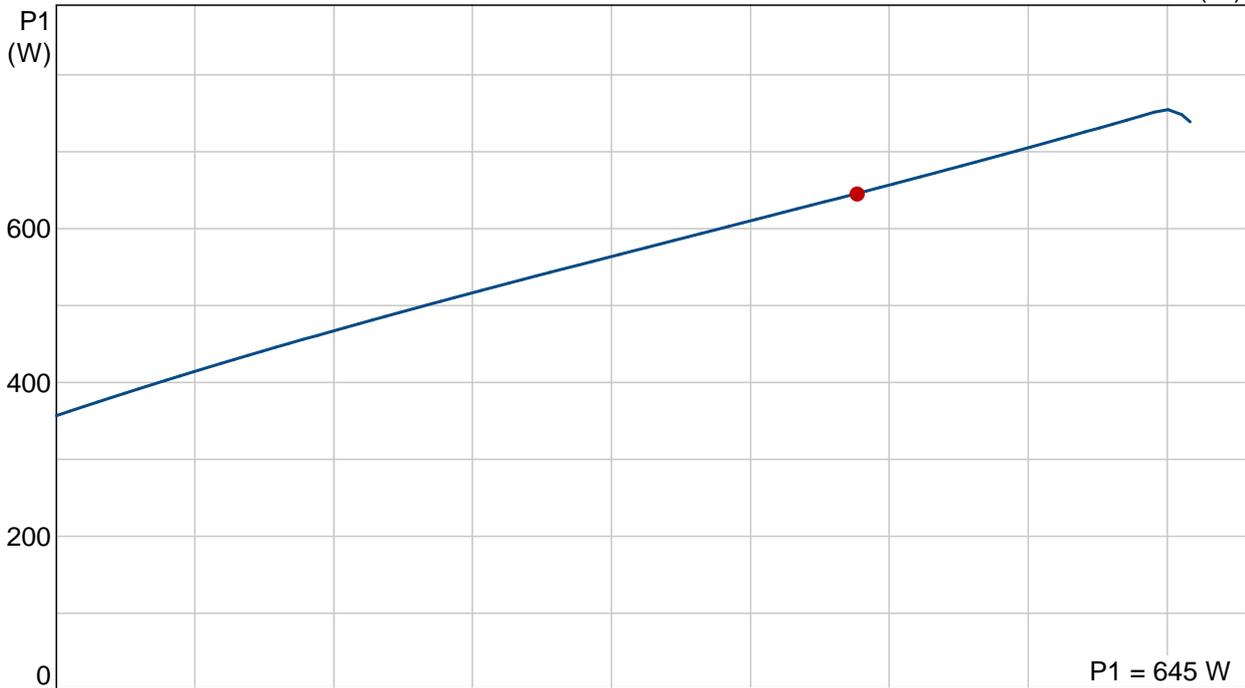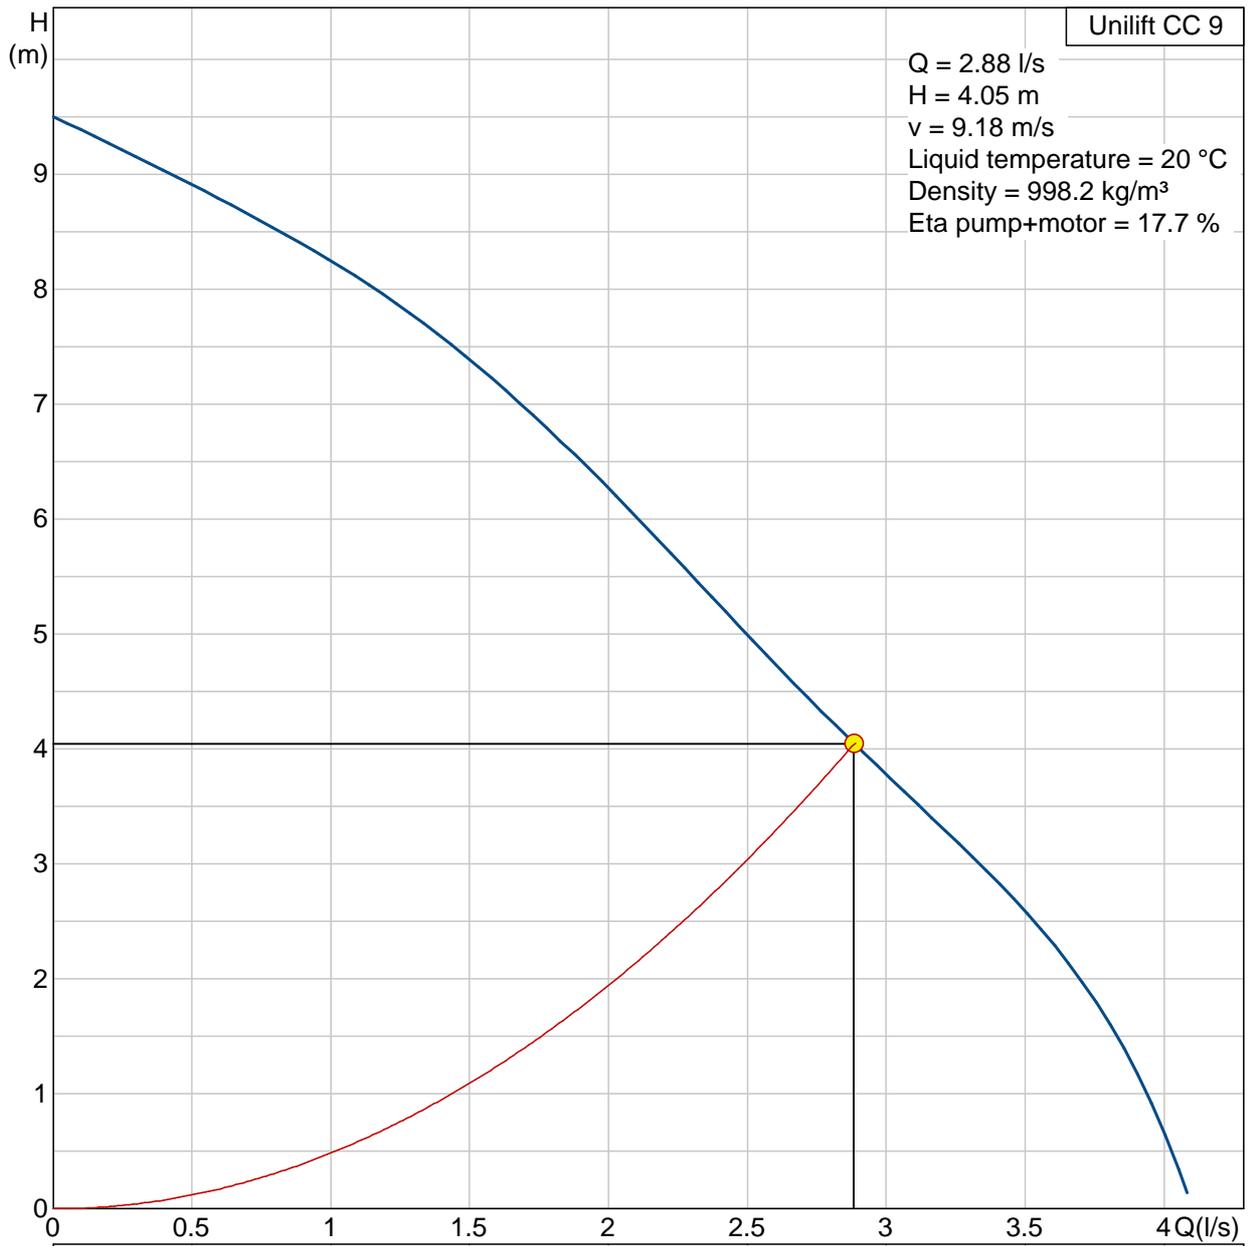

96280969 Unilift CC 9 50 Hz

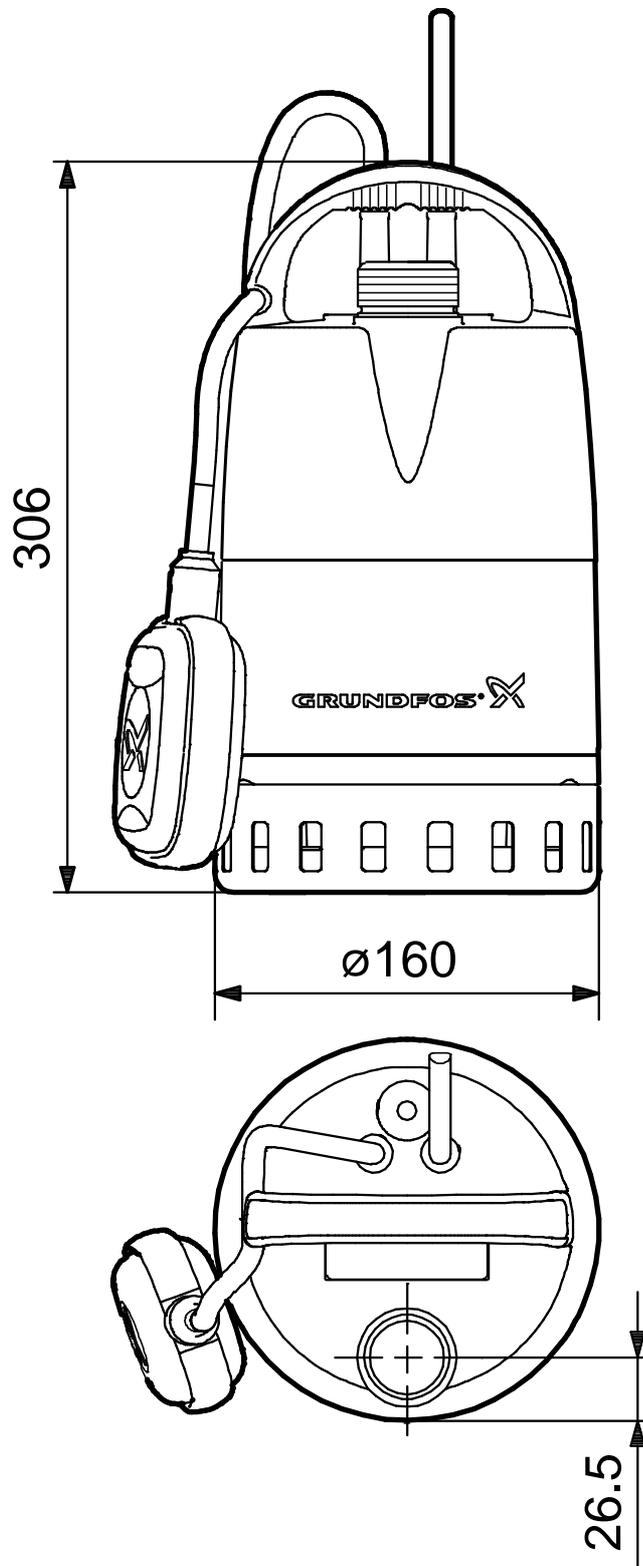

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

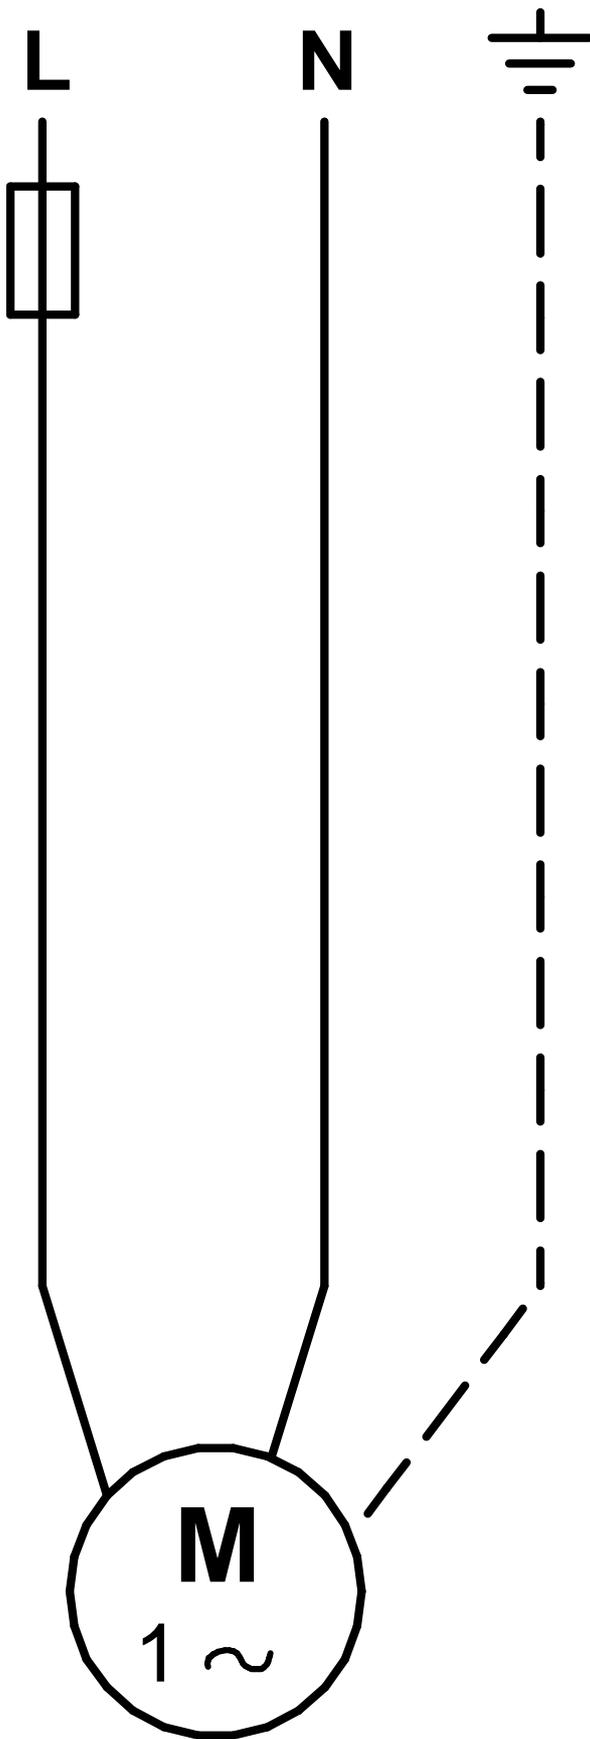

Note! All units are in [mm] unless others are stated.