

- two bench cameras located on either side of the benches instead of a central bench camera
- one or more cameras located on the reverse side, ideally in the tribune, to cover the benches. This camera(s) would be in addition to the reverse angle camera

If portable handheld cameras near the benches are used, then there is a limit to a maximum of two cameras. They must also respect the minimum distance of five metres from the substitutes' benches, be located outside the technical area, and not disturb players, coaches or match officials, who must have a clear view of all corners of the field of play.


Bench cameras may not use microphones to pick up sound from the technical area.

GOAL-LINE CAMERAS (L)

Goal-line cameras positioned in the stand or the roof, situation exactly on the goal line, if no safety or security issues are present.

ADDITIONAL LOW BEHIND-GOAL CAMERA (M)

An additional low behind-goal camera may be installed on the main camera or reverse side of the goals. In principle, the camera should be installed on the opposite side and should provide a different angle to the one installed for minimum coverage.

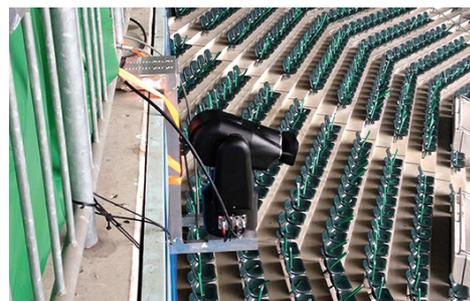

3.1.4 GUIDELINES FOR SPECIFIC CAMERA POSITIONS

The guidelines below provide additional guidelines for the use of certain host broadcaster cameras. Any questions regarding detailed operations should be addressed to UEFA.

PITCHSIDE HALFWAY CAMERA

Due to its proximity to the team benches and the fourth official, the positioning of this camera is a sensitive matter.

- it is vital that the pitchside halfway camera is in line with the halfway line
- it should be located in front of, and/or to the side of, the fourth official's bench, so that both the camera and the official have a clear view of the field of play
- the coaches and players' view of the pitch must not be blocked
- the working space for the assistant referee working the nearside touchline must not be encroached upon
- the location of the camera, if in front of any potential movement of people, must allow an unobstructed view of the pitch
- the positioning of the pitchside halfway camera should not affect the entrance of the players

STEADICAMS

The host broadcaster must use a steadicam to cover the following on-field activities:

PRE-MATCH

- One host broadcaster steadicam may be used on the field of play to cover the pre-match teams' pitch inspection