


WHITE-STAR Double-J Ureteral Stents-Set

1 pirkimo dalis - Trumpalaikio naudojimo ureteriniai stentai

SET COMPONENTS 10. Rinkinį sudaro:

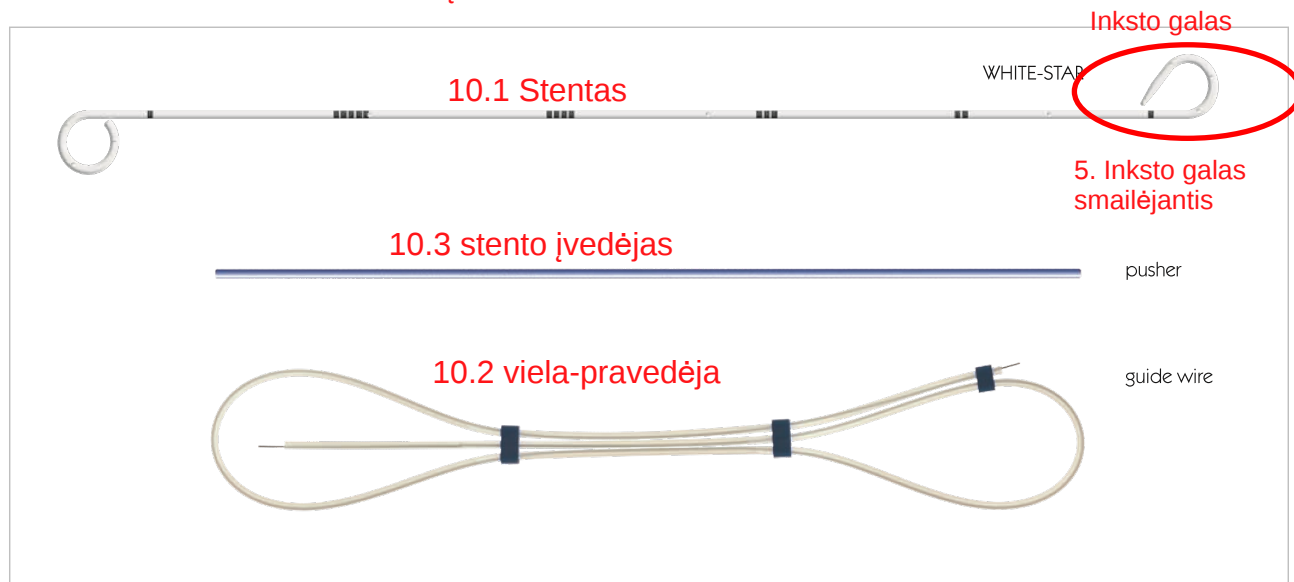

Ureteral Stent

- ♦ Polyurethane (PUR) 3. speciali poliuretano danga PUR
- ♦ Drainage openings in pigtails and shaft 4. drenavimo skylutės per visą kateterio ilgį
- ♦ Open or closed tip 7. Abu galai atviri/arba pūslės galas atviras
- ♦ Markings for exact positioning 6. Rentgenokontrastiniai žymėjimai pozicionavimui
- ♦ Radiopaque

Pusher 10.3

- ♦ Length: 40 cm - stento įvedėjas 40 cm ilgio

Guide Wire

- ♦ PTFE-coated

Clamp

- ♦ 2 clamps in sets with closed tip



WHITE-STAR Double-J Ureteral Stents-Set

Open tip				Vielos ilgis	10.2 Viela- pravedēja		
8. Dydziai	9. Ilgiai	Order Code without Guide Wire	Order Code with Guide Wire	Guide Wire Length (cm)	Guide Wire Diameter	Guide Wire Tip	Guide Wire Stiffness
4.7	24	EN-410524	EN-360524	125	0.028"	straight	standard
4.7	26	EN-410526	EN-360526	125	0.028"	straight	standard
06	24	EN-410624	EN-360624	125	0.035"	straight	standard
06	26	EN-410626	EN-360626	125	0.035"	straight	standard
06	28	EN-410628	EN-360628	125	0.035"	straight	standard
06	30	EN-410630	EN-360630	125	0.035"	straight	standard
07	24	EN-410724	EN-360724	125	0.035"	straight	standard
07	26	EN-410726	EN-360726	125	0.035"	straight	standard
07	28	EN-410728	EN-360728	125	0.035"	straight	standard
07	30	EN-410730	EN-360730	125	0.035"	straight	standard
08	24	EN-410824	EN-360824	125	0.035"	straight	standard
08	26	EN-410826	EN-360826	125	0.035"	straight	standard
08	28	EN-410828	EN-360828	125	0.035"	straight	standard
08	30	EN-410830	EN-360830	125	0.035"	straight	standard

Closed tip							
Size (FR/CH)	Length (cm)	Order Code without Guide Wire	Order Code with Guide Wire	Guide Wire Length (cm)	Guide Wire Diameter	Guide Wire Tip	Guide Wire Stiffness
4.7	24	EN-400524	EN-300524	125	0.028"	straight	standard
4.7	26	EN-400526	EN-300526	125	0.028"	straight	standard
06	24	EN-400624	EN-300624	125	0.035"	straight	standard
06	26	EN-400626	EN-300626	125	0.035"	straight	standard
06	28	EN-400628	EN-300628	125	0.035"	straight	standard
06	30	EN-400630	EN-300630	125	0.035"	straight	standard
07	24	EN-400724	EN-300724	125	0.035"	straight	standard
07	26	EN-400726	EN-300726	125	0.035"	straight	standard
07	28	EN-400728	EN-300728	125	0.035"	straight	standard
07	30	EN-400730	EN-300730	125	0.035"	straight	standard
08	24	EN-400824	EN-300824	125	0.035"	straight	standard
08	26	EN-400826	EN-300826	125	0.035"	straight	standard
08	28	EN-400828	EN-300828	125	0.035"	straight	standard
08	30	EN-400830	EN-300830	125	0.035"	straight	standard