

ASAHI

PTCA Guide Wire

PTVA vielos nukreip jos vairiems susiaur jimams
rekanalizuoti

ASAHI's unique guide wire technology with Composite Core


SION TECC 

Leading to the NEXT

ASAHI's unique guide wire technology with Composite Core

SION TECC

Leading to the NEXT

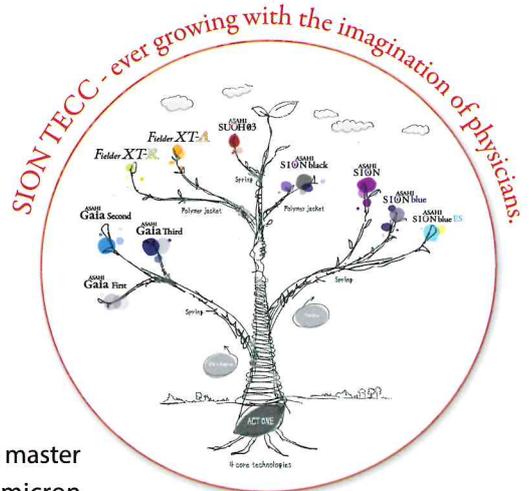


“Small changes, great possibilities”

SION TECC is at the forefront of innovation.

Listening to the needs of physicians and drawing on the skills of Japanese master craftsmen, we created ACT ONE : an ingenious enhancement of the 10 micron core wire that forms part of our guide wires' unique Composite Core design.


Technology that pushes back the boundaries of guide wire manipulation, enabling movement just as you imagine it.

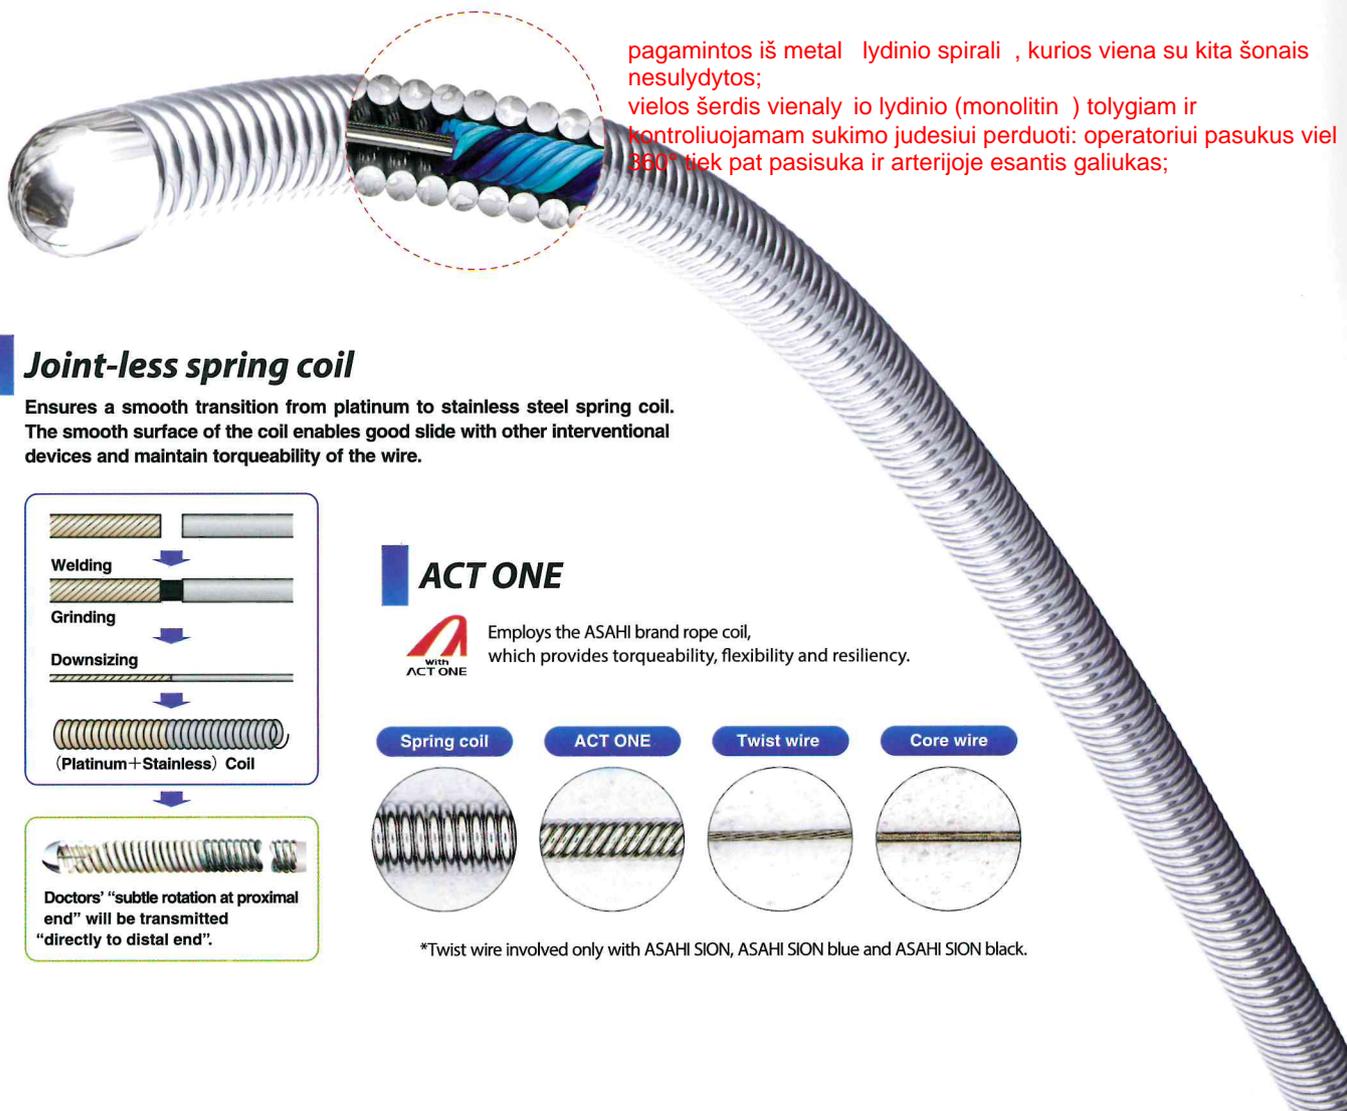

pagamintos iš metal lydinio spirali, kurios viena su kita šonais nesulydytos;
 vienos šerdies viena lydinio (monolitinis) tolygiams ir kontroliuojamam sukimo judesiui perduoti: operatoriui pasukus viel 360° tiek pat pasisuka ir arterijoje esantis galiukas;

Joint-less spring coil

Ensures a smooth transition from platinum to stainless steel spring coil. The smooth surface of the coil enables good slide with other interventional devices and maintain torqueability of the wire.




Doctors' "subtle rotation at proximal end" will be transmitted "directly to distal end".


ACT ONE



Employs the ASAHI brand rope coil, which provides torqueability, flexibility and resiliency.

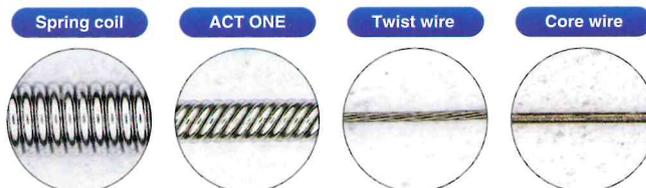


*Twist wire involved only with ASAHI SION, ASAHI SION blue and ASAHI SION black.

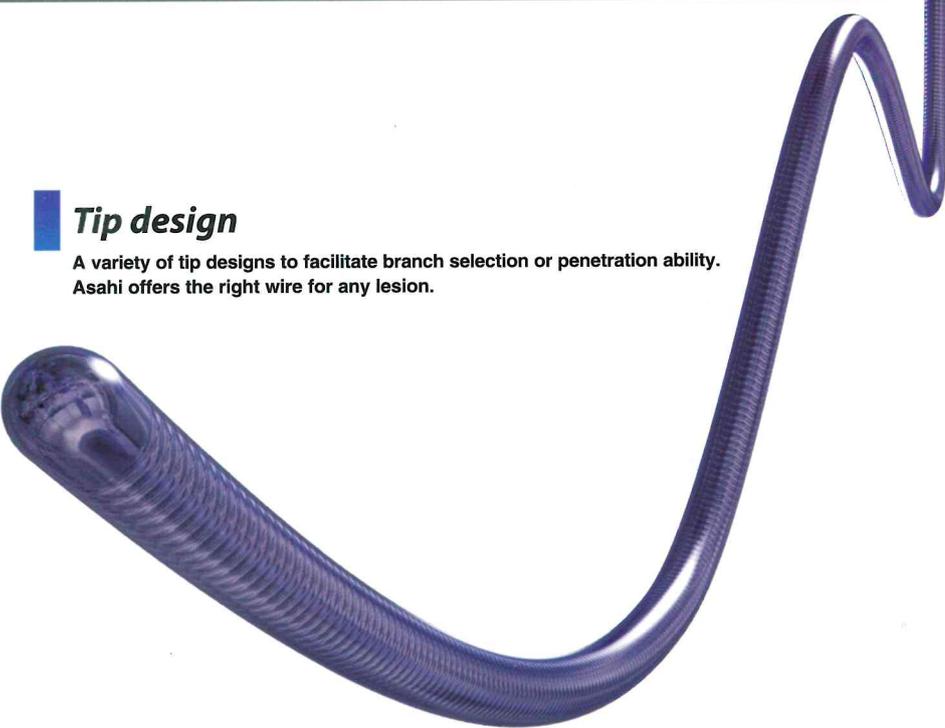

Tip design

A variety of tip designs to facilitate branch selection or penetration ability. Asahi offers the right wire for any lesion.

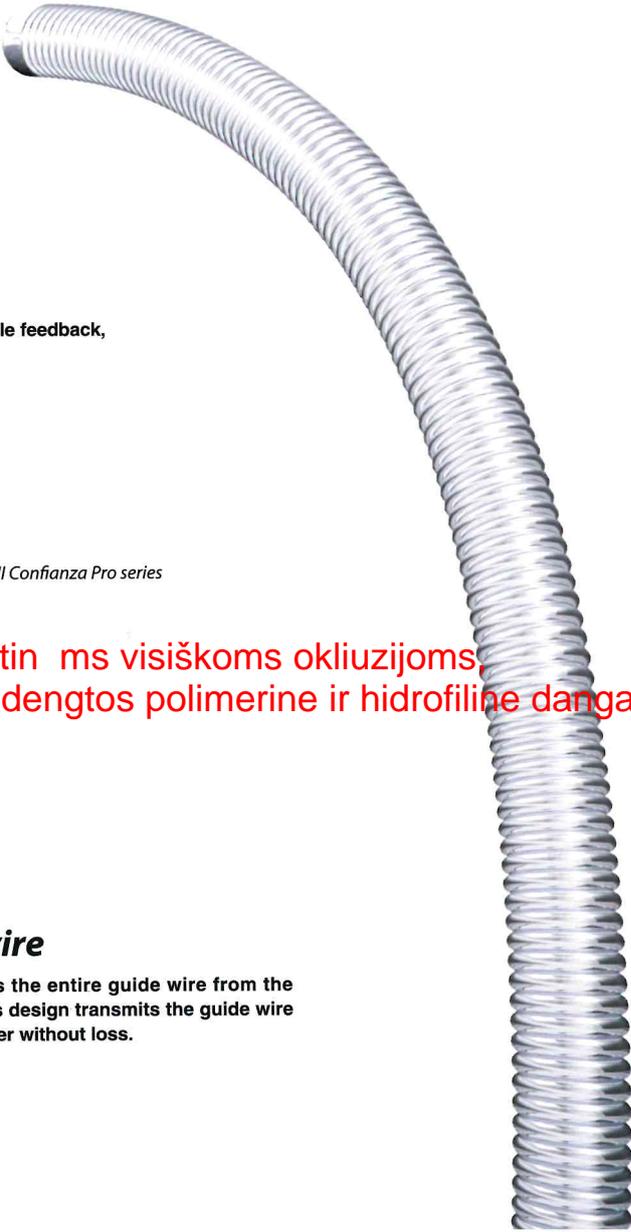

Coatings

A variety of coatings provide either superior lubricity, tactile feedback, or an optimal combination of the two.

- Choice of lubricity to suit the case at hand

Full silicone coating
Grand Slam, ASAHI Miracle 12 / ASAHI MIRACLEbros 12

Hybrid coating [Silicone + Hydrophilic coating (SLIP-COAT®)]
ASAHI SION blue, ASAHI SION blue ES

Hydrophilic coating with uncoated tip
ULTIMATEbros 3, ASAHI Gaia series, ASAHI Conquest Pro / ASAHI Confianza Pro series

Full hydrophilic coating (SLIP-COAT®)
ASAHI SION, ASAHI SUOH 03

Polymer jacket + Hydrophilic coating (SLIP-COAT®)
Fielder XT-R, Fielder XT-A, ASAHI SION black

Lubricity

Higher

I tin ms visiškoms okliuzijoms, padengtos polimerine ir hidrofilinė danga...

One-piece core wire

One-piece core wire supports the entire guide wire from the proximal to the distal end. This design transmits the guide wire torque from one end to the other without loss.

Frontline guide wires • prastiniams atvejams: nuo 0,5 g iki 0,8 g hidrofiliškas galiukas, iki 3 cm ilgio rentgenkontrastiškas;

ASAHI SION blue



- Tip load 0.5 gf
- Tip radiopacity 3 cm
- SLIP-COAT® coating over the spring coil*



First choice guide wire with proprietary Composite Core construction for greater tip flexibility and support performance. Easily-discernible shaft color for differentiation from other ASAHI wires. *Silicone coating up to 15mm from the tip for safer procedures.

ASAHI SION



- Tip load 0.7 gf
- Tip radiopacity 3 cm
- SLIP-COAT® coating over the spring coil



First choice guide wire with proprietary Composite Core construction for excellent tip durability and torque performance in tight anatomy. Flexible shaft and atraumatic tip for stress-free operation.


ASAHI SION black



- Tip load 0.8 gf
- Tip radiopacity 3 cm
- Polymer jacket length 20 cm
- SLIP-COAT® coating 40 cm



Frontline guide wire with a polymer jacket designed to retain flexibility while crossing high resistance stenosis and vessels.

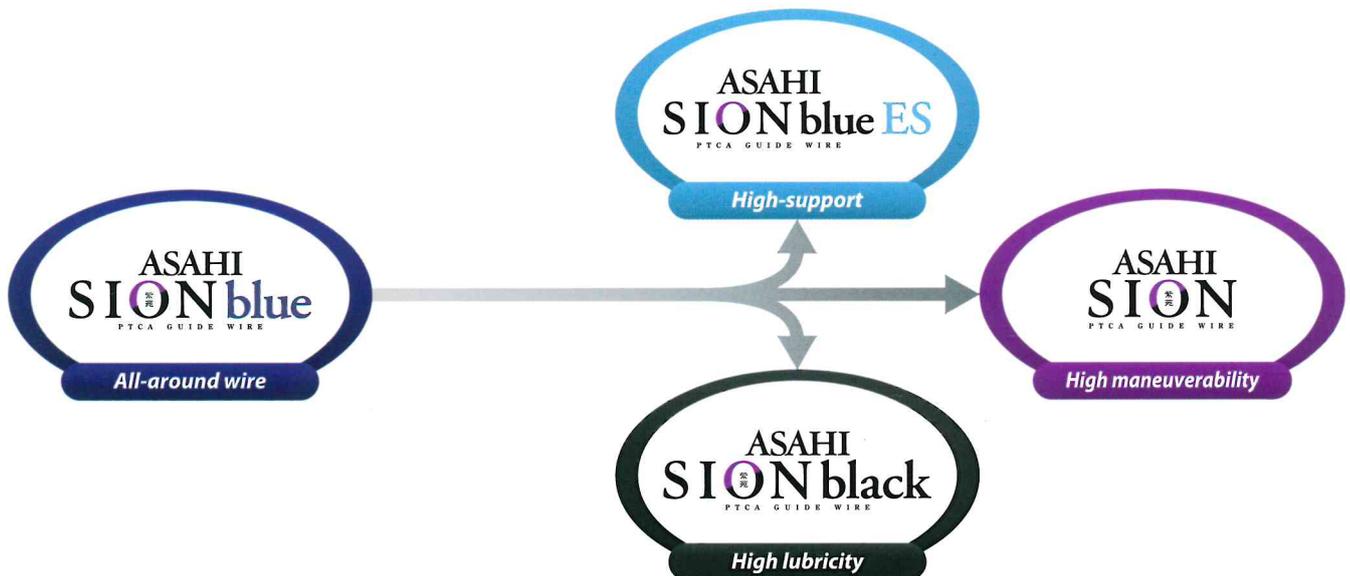

Support guide wires

- universalios: galiukas nuo 0,8 g iki 1,0 g hidrofilinis, 3 - 16 cm rentgenokontrastiškas;

ASAHI SION blue ES



- Tip load 0.5 gf
- Tip radiopacity 3 cm
- SLIP-COAT® coating 40 cm*



An extra support type wire with SION TECC.
A wire that stabilizes the guide catheter for stress-free device delivery.
*Silicone coating up to 2.5mm from the tip for safer procedures.

Grand Slam




- Tip load 0.7 gf
- Tip radiopacity 4 cm
- Silicone coating over the spring coil



Stiff wire shaft provides extra support for delivery of interventional devices in extreme cases.

Frontline wires

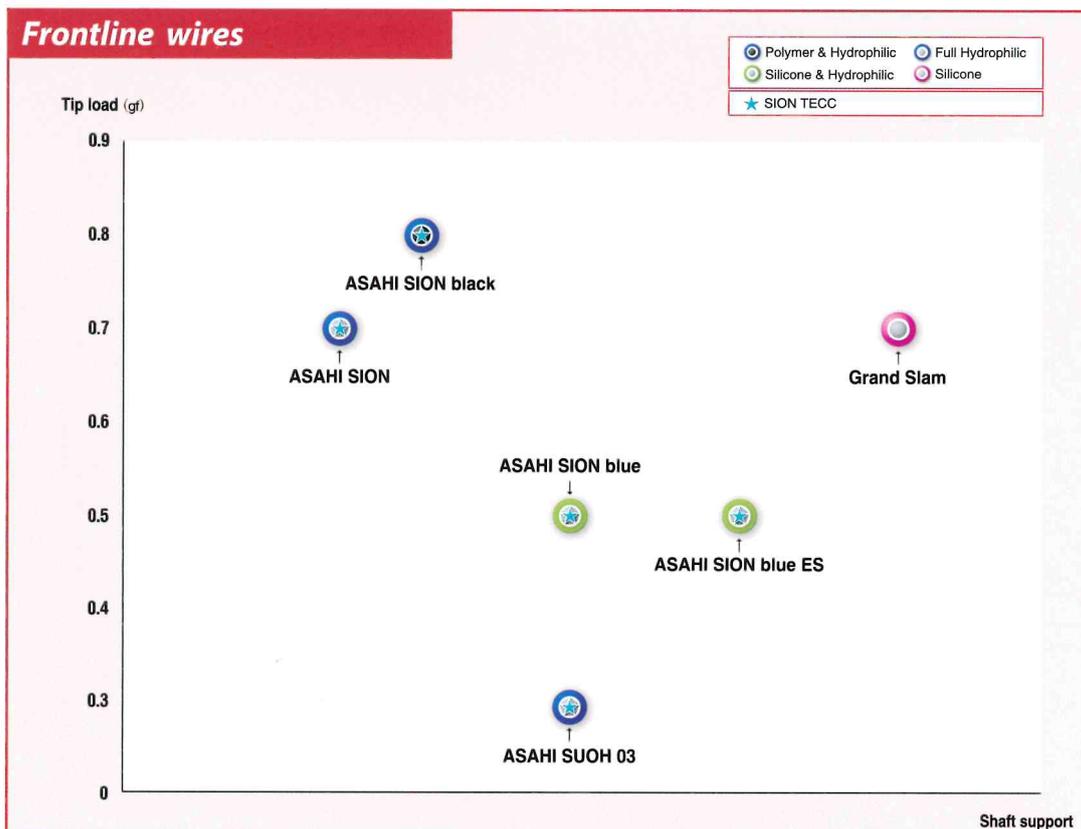

Complex and Chronic occlusion guide wires

Fielder XT-R



- Tip load 0.6 gf
- Tip radiopacity 16 cm
- Polymer jacket length 17 cm
- Tip outer diameter 0.26 mm (0.010 inch)
- SLIP-COAT® coating over the polymer jacket



Guide wire recommended for narrow channel tracking with its low profile, flexible tip, and high lubricity polymer coating.

Fielder XT-A



- Tip load 1.0 gf
- Tip radiopacity 16 cm
- Polymer jacket length 17 cm
- Tip outer diameter 0.26 mm (0.010 inch)
- SLIP-COAT® coating over the polymer jacket



Guide wire with a higher tip load than Fielder XT and XT-R, facilitating entry into the chronic occluded lesion.

• I tin ms visiškoms okliuzijoms: galiuko kietumas nuo 3,0 g iki 12,0 g; galiukas 3 - 11 cm rentgenokontrastiškas;

ULTIMATEbros 3



- Tip load 3.0 gf
- Tip radiopacity 11 cm
- SLIP-COAT® coating over the spring coil until the middle of the shaft / without tip



Long hydrophilic coating maintains high maneuverability, allowing for improved wire manipulation in heavy stenosed lesions. Fine shaping improves vessel selectivity and reduces the risk of false lumen expansion.

• I tin ms visiškoms okliuzijoms smailiu galiuku: galiuko kietumas nuo 9,0 g iki 20,0 g; galiukas 17 - 20 cm rentgenokontrastiškas; galiuko storis - ne didesnis nei 0,009";

ASAHI Gaia series (First, Second, Third)



- Tip load
 - ASAHI Gaia First 1.7 gf
 - ASAHI Gaia Second 3.5 gf
 - ASAHI Gaia Third 4.5 gf
- Tip radiopacity 15 cm
- Tip outer diameter
 - ASAHI Gaia First 0.26 mm (0.010 inch)
 - ASAHI Gaia Second 0.28 mm (0.011 inch)
 - ASAHI Gaia Third 0.30 mm (0.012 inch)
- SLIP-COAT® coating 40 cm



Guide wire with a high maneuverability in the chronic total occluded lesion, and a tip designed to improve penetrability into the lesion while remaining flexible.

Complex and Chronic occlusion guide wires

ASAHI Conquest Pro series / ASAHI Confianza Pro series

9 / 12



- Tip load 9.0 / 12.0 gf
- Tip radiopacity 20 cm
- SLIP-COAT® coating over the spring coil, excluding the tip
- Tip outer diameter 0.23 mm (0.009 inch)



Tapered guide wire for crossing complex lesion with heavy calcification or tough fibrous tissues.


ASAHI Miracle 12 / ASAHI MIRACLEbros 12



- Tip load 12.0 gf
- Tip radiopacity 11 cm
- Silicone coating over the spring coil



Guide wire with good tactile feed back which maintains torqueability through the occlusion.

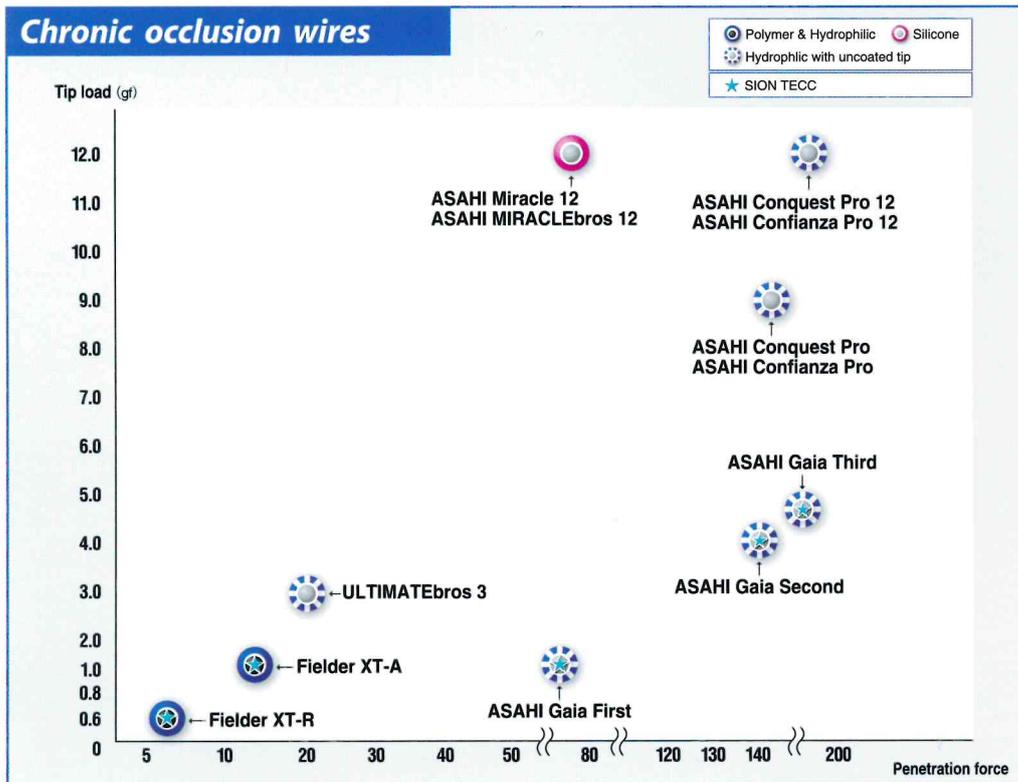

Polymer & Hydrophilic
Enhanced lubricity for better crossability of severe stenoses.

Hydrophilic with uncoated tip
Enhance lubricity for easier wire manipulation in lesions.

Silicone
Prevent slippage to gain tactile response for lesion morphology.

SION TECC

Externalization guide wire

ASAHI RG3



- Tip load 3.0 gf
- Tip radiopacity 3 cm
- SLIP-COAT® coating over the spring coil and until the middle of the shaft
- Shaft diameter 0.26 mm (0.010 inch)
- Guide wire length 330 cm



For guide wire externalization only. Optimal wire strength, hydrophilic coating and 0.26 mm (0.010 inch) shaft provide superior inside-catheter pushability. With the inner wall damage possibility reduced in tortuous vessels as well, the risk of complication is minimized.

Retrograde guide wire

ASAHI SUOH 03




- Tip load 0.3 gf
- Tip radiopacity 3 cm
- SLIP-COAT® coating 52 cm




Flexible shaft provides superb trackability and crossability in severe tortuosity. The long radiopaque segment provides good visualization.

Tip flexibility

Radiopaque distal 30 mm is the most flexible among ASAHI guide wires.

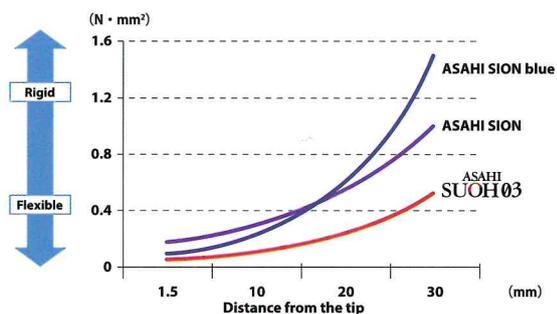


Angiogram by tip injection



SUOH 03 Wiring

Tip load (gf)

The softest tip among ASAHI guide wires – 0.3 gf.*

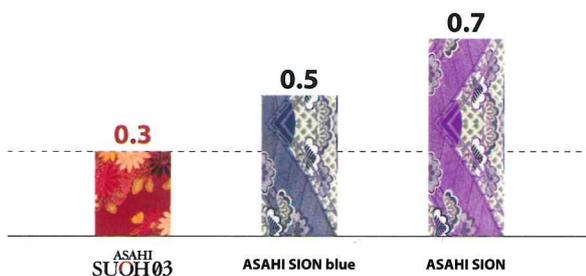

All the data were obtained by company standardized test, which may differ from industry standardized tests. All the data do not guarantee that all devices have exactly the same performance with the samples used for tests.

*Softest available tip load at 0.3 gf is as of Jan 2017.

Ordering information

ties s ar J formos galiukai:

viel storis - 0,014", ilgis - ne mažesnis nei 180 cm ir ne didesnis nei 300 cm;

Product	Catalog No.	Diameter (mm (inch))	Radiopaque segment (cm)	Spring coil length (cm)	Length (cm)	Tip shape
ASAHI SION blue SION TECC	AHW14R004S	0.36 (0.014)	3	20	180	Straight
	AHW14R304S				300	Straight
	AHW14R004J				180	J
	AHW14R304J				300	J
ASAHI SION SION TECC	AHW14R001S	0.36 (0.014)	3	28	180	Straight
	AHW14R301S				300	Straight
	AHW14R001J				180	J
	AHW14R301J				300	J
ASAHI SION black SION TECC	APW14R010S	0.36 (0.014)	3	12	180	Straight
	APW14R310S				300	Straight
	APW14R010J				180	J
	APW14R310J				300	J
ASAHI SION blue ES SION TECC	AHW14R017S	0.36 (0.014)	3	15	180	Straight
	AHW14R317S				300	Straight
	AHW14R017J				180	J
	AHW14R317J				300	J
Grand Slam	AG141302	0.36 (0.014)	4	4	180	Straight
	AG141002J				300	Straight
	AG141002J				180	J
Fielder XT-R SION TECC	APW14R005S	0.26 / 0.36 (0.010 / 0.014)	16	16	190	Straight
	APW14R305S				300	Straight
Fielder XT-A SION TECC	APW14R009S	0.26 / 0.36 (0.010 / 0.014)	16	16	190	Straight
	APW14R309S				300	Straight
ULTIMATEbro 3	AHW14S003S	0.36 (0.014)	11	11	180	Straight
ASAHI Gaia First SION TECC	AHW14R007P	0.26 / 0.36 (0.010 / 0.014)	15	15	190	Pre-shape
	AHW14R307P				300	Pre-shape
ASAHI Gaia Second SION TECC	AHW14R008P	0.28 / 0.36 (0.011 / 0.014)	15	15	190	Pre-shape
	AHW14R308P				300	Pre-shape
ASAHI Gaia Third SION TECC	AHW14R011P	0.30 / 0.36 (0.012 / 0.014)	15	15	190	Pre-shape
	AHW14R311P				300	Pre-shape
ASAHI Conquest Pro / ASAHI Confianza Pro	AGH143090	0.23 / 0.36 (0.009 / 0.014)	20	20	180	Straight
ASAHI Conquest Pro 12 / ASAHI Confianza Pro 12	AGH143091	0.23 / 0.36 (0.009 / 0.014)	20	20	180	Straight
ASAHI Miracle 12 / ASAHI MIRACLEbro 12	AG14M070	0.36 (0.014)	11	11	180	Straight
ASAHI RG3	AHW10S302S	0.26 (0.010)	3	8	330	Straight
ASAHI SUOH 03 SION TECC	AHW14R013P	0.36 (0.014)	3	19	190	Pre-shape
	AHW14R313P				300	Pre-shape
ASAHI EXTENSION 165cm	AG149001	0.36 (0.014)	-	-	165	-

I tin ms visiškoms okliuzijoms padengtos polimerine ir hidrofiline danga, galiukas rentgenokontrastiškas iki 3 cm ilgio, viel ilgiai - 200 cm ir 300 cm, vielos galiukas palenktas iki 1 mm ilgyje.

galimyb prijungti viel prat s j

CE 0344

Not all products and shapes are available in all markets. Please check availability with your sales representative.
Coated with SLIP-COAT® coating.

© 2017 ASAHI INTECC CO., LTD.
"ASAHI", "ACT ONE", "ASAHI SION", "ASAHI Gaia", "Fielder", and "SUOH" are trademarks or registered trademarks of ASAHI INTECC CO., LTD. in Japan and other countries.

Manufactured by:

Distributed by:

ASAHI INTECC

ASAHI INTECC CO.,LTD.

3-100 Akatsuki-cho, Seto, Aichi 489-0071 Japan
TEL:+81-561-48-5551 FAX:+81-561-48-5552
<http://www.asahi-intecc.com>