



# SHIELDED DRY BATH

## THERMOSTATICALLY CONTROLLED SYSTEM

1.1.

**Optimum radiation protection:** shielded **6 vials** support.

**Rapidity:** Efficient heating system (7 °C/min).

**Performance:** Wide thermostat range (up to 160 °C).

**Safety:** heat and power indicator light.

**Accuracy:** digital thermometer for the vial holder.


Digital Dry Bath Heater




Digital Dry Bath Chiller



### Effective dimensions (mm)

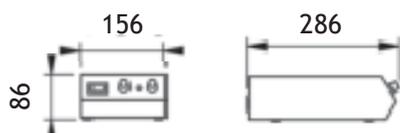

Digital Dry Bath Heater

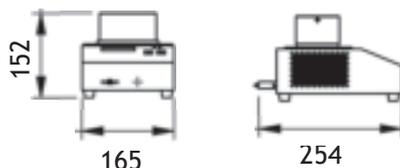

Digital Dry Bath Chiller

### Characteristics

General	Digital heater	Digital chiller
<b>Temperature range</b>	+5 to +150 °C	-10 to +100 °C
<b>Overall dimensions:</b>	L 156 x D 286 x H 86 mm	L 165 x D 254 x H 152 mm
<b>Radiation protection:</b>	5 mm lead	
<b>Weight:</b>	7.2 kg.	9.2 kg.
<b>Package dimensions:</b>	L 330 x D 280 x H 170 mm	
<b>Package weight:</b>	9 kg.	11 kg.
<b>Ref.:</b>	00014837	00005243

2.

3.

 Download the product data sheet [lemerpax.com](http://lemerpax.com)