
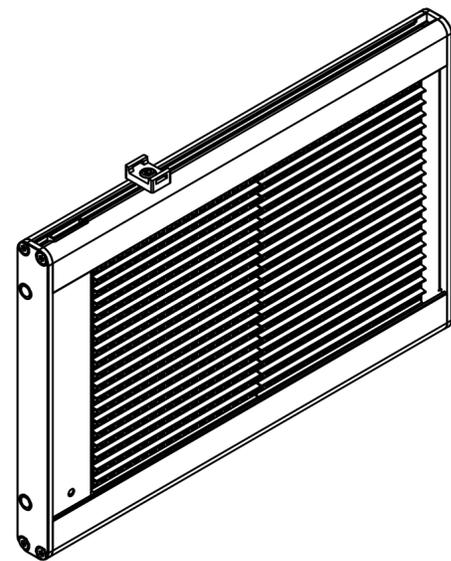


Light sensor, Do not cover

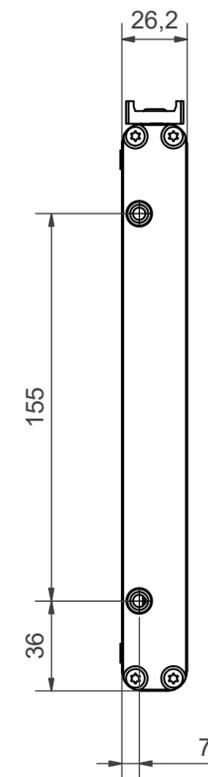



Must fulfill general appearance specifications doc.nr. 02919.

All dimensions with unspecified tolerance must conform SS-ISO 2768 Medium

Designed by MBe	Drawn by MBe	Checked by KHo	S-class S0	Affirmed	Scale 1:2	Weight 1,5 kg	Proj. Method ⊕	Art. No. LG2350000-000
Mobitec AB		19x40 8,7/7 Standard			Date 2015-05-04		Revision 0	
Page: 1							Drawing No. LG2350000-000	

Table		
Pos	Description	Material/Surface Treatment
A	Top Profile	Alu Profile EN AW 6060 Powder coated, structure black
B	Bottom Profile	Alu Profile EN AW 6060 Powder coated, structure black
C	Back cover	Alu Sheet EN AW 10 50 Dobel black
D	Side profile	Steel sheet EN 10130 powder coated RAL9005
E	Screw	M4x12 MFT-TT cromated black
F	Louver	Plastic Lexan 503 R
G	Mounting bracket	Alu sheet EN AW 5754 Powder coated, structure black
H	Blind	Alu sheet EN AW 5754 Powder coated, structure black
I	Screw	M4x8 MFT-TT cromated black

Number of diods:s = 760
 Nominal voltage = 24V DC
 Supply voltage = 9 - 36 V DC
 Max current consumption = 1,6A
 Operating temperature = -30°C to +70°C
 IP class = N.A
 Cleaning = Isopropanol

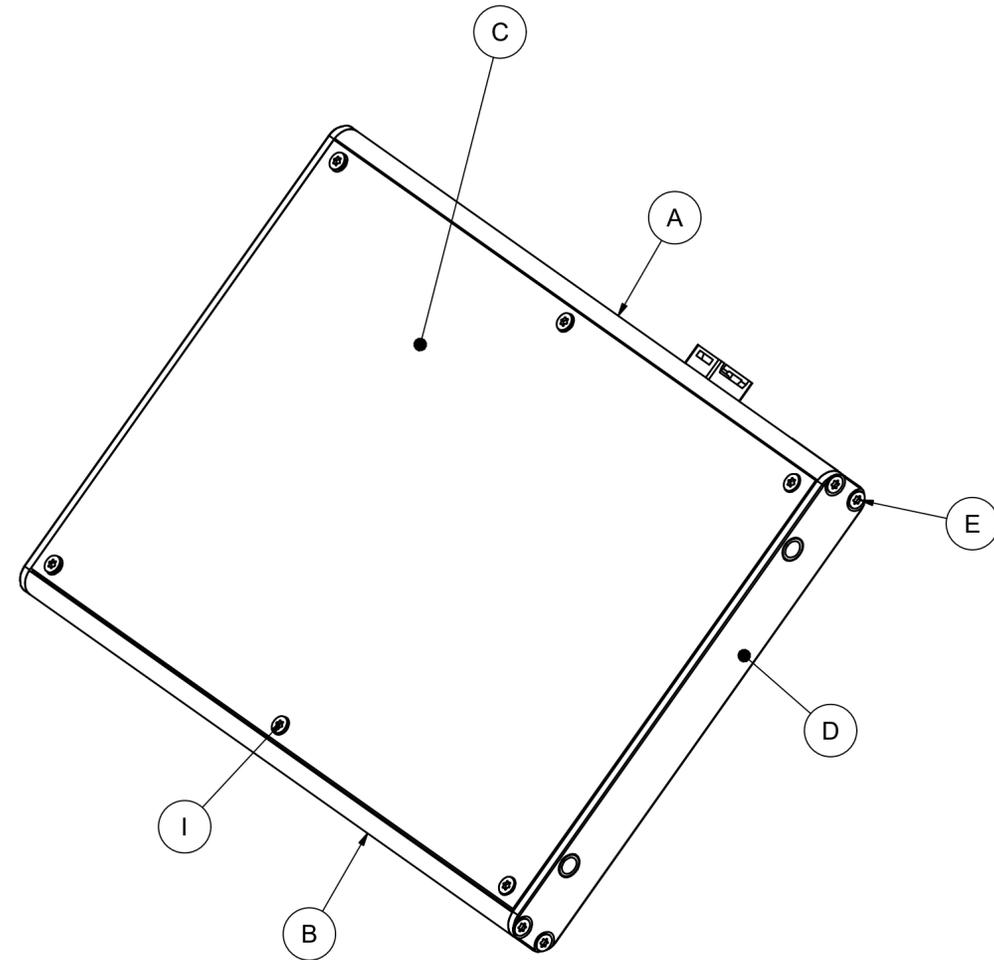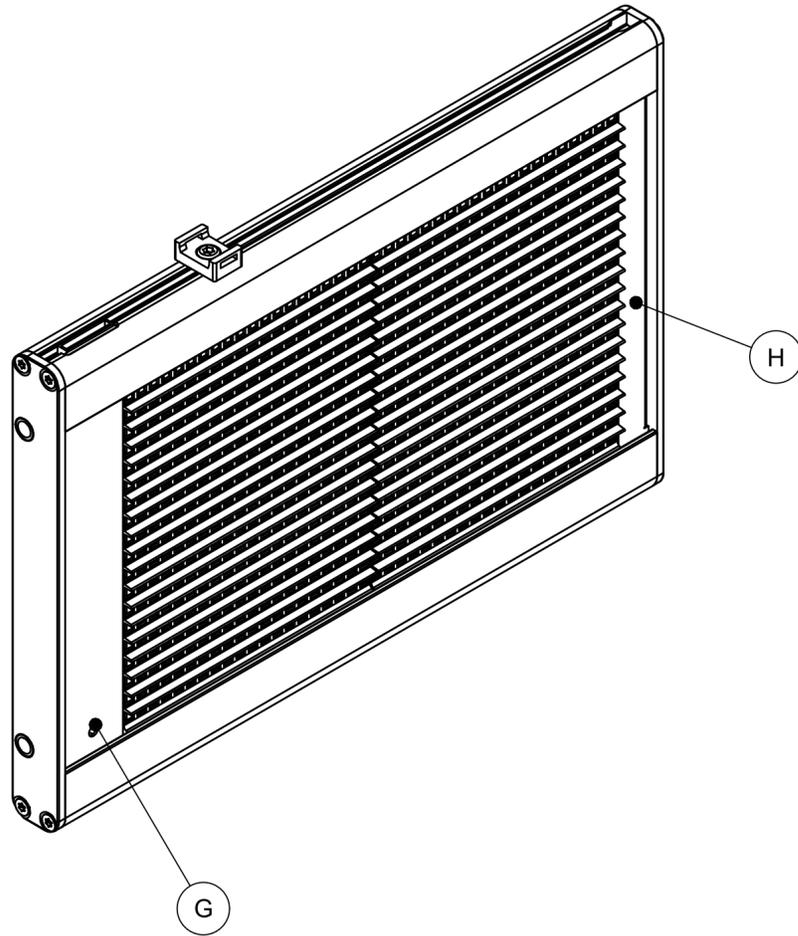

Designed by	Drawn by	Checked by	S-class	Affirmed	Scale	Weight	Proj. Method	Art. No.
MBe	MBe	KHo	S0		1:2	1,5 kg	☐	LG2350000-000
Mobitec AB 19x40 8,7/7 Standard MobilED Ultima Amber								OEM Number LG2350000-000
								Date 2015-05-04
								Drawing No. LG2350000-000
								Revision 0