Product Catalog

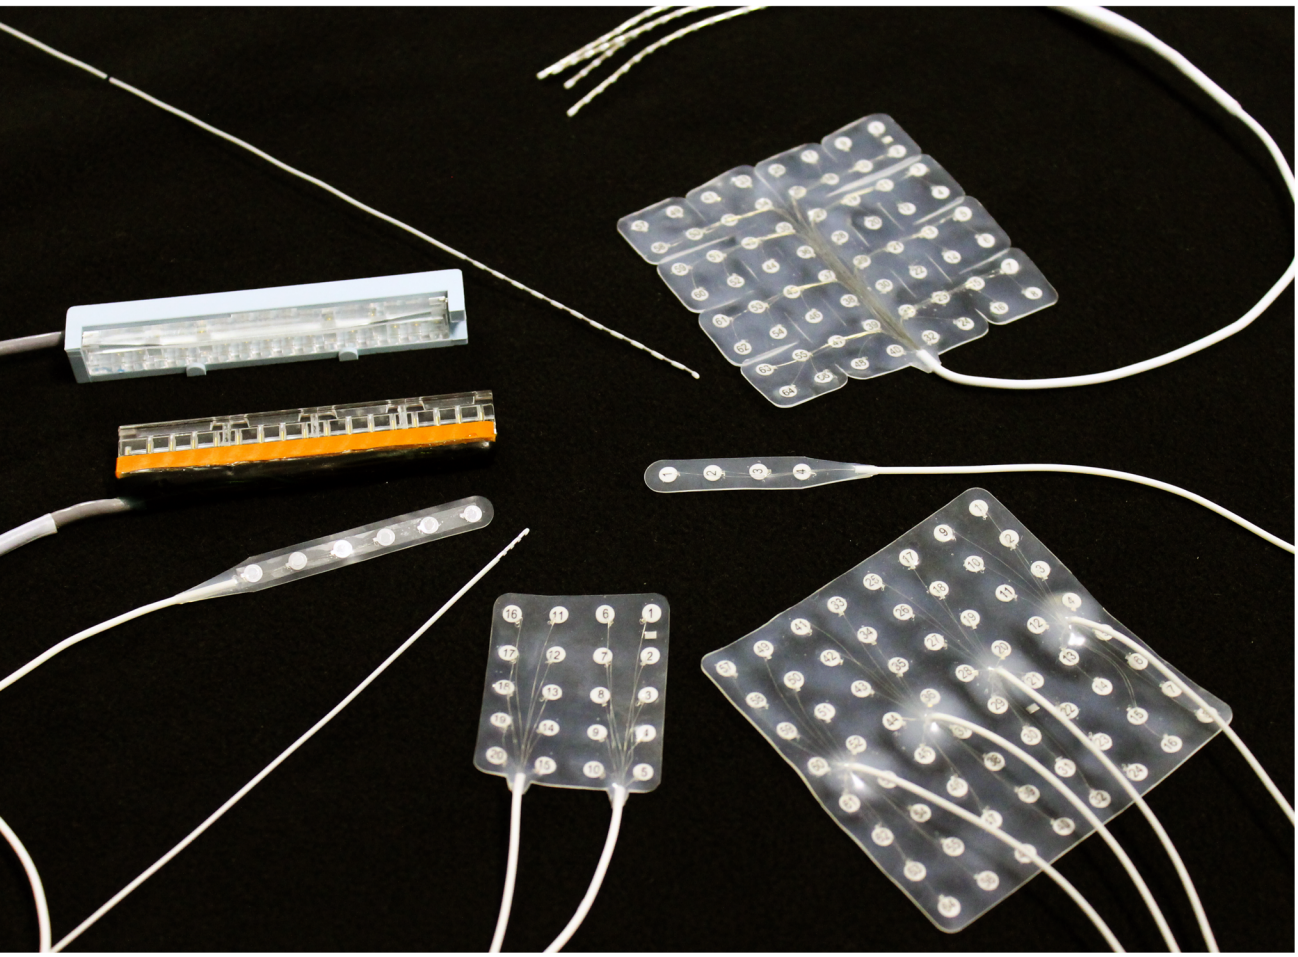

AD-TECH®

MEDICAL INSTRUMENT CORPORATION

p.d.1.1
1. Vienkartinio naudojimo, sterilus, skirtas intraoperaciniam monitoravimui;
2. Juostelinio tipo, su 4-iais sunumeruotais EEG kontaktais;
3. Kontaktų juostelės ilgis 50 mm, plotis 8,0 mm, tarpai tarp kontaktų centrų 10 mm;
4. Kontaktų metalas – platina

AD-TECH® FREQUENTLY ORDERED PRODUCTS

Strip Electrodes

Catalog #: TS04R-SP10X-000
4-contact, 1x4 LTM strip. Non-numbered. with reinforcement. Platinum, 10 mm spacing.



Catalog #: IS04R-SP10X-000 ✓
4-contact, 1x4 IOM strip. Numbered. Platinum, 10 mm spacing. ✓
p.d.1.1 Juostelinis EEG elektrodas.

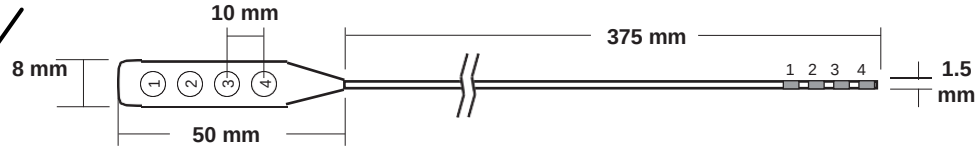

IOM Electrodes with Cables Attached

Catalog #: MS04R-IP10X-0JH
4-contact, 1x4 IOM strip, 6mm contacts. Platinum, 10 mm spacing. Attached 1.8m cable

Catalog #: MS06R-IP10X-0JH
6-contact, 1x6 IOM strip, 6mm contacts. Platinum, 10 mm spacing. Attached 1.8m cable.

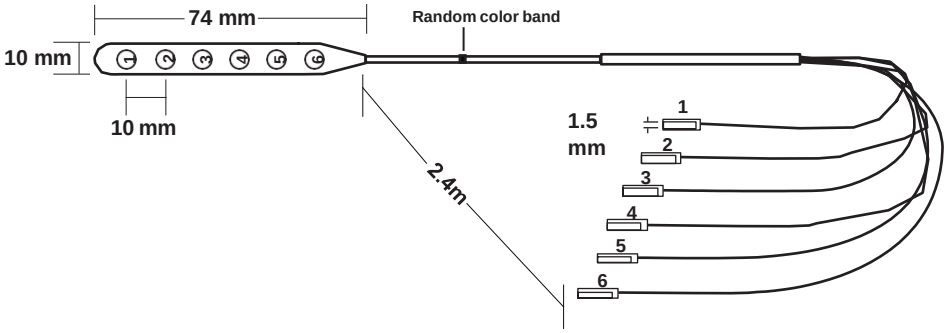

Epidural Spinal Electrodes

Catalog #: CEDL-3PDINX-100
3-contact spinal electrode with pre-attached lead and stylet. Platinum contacts.

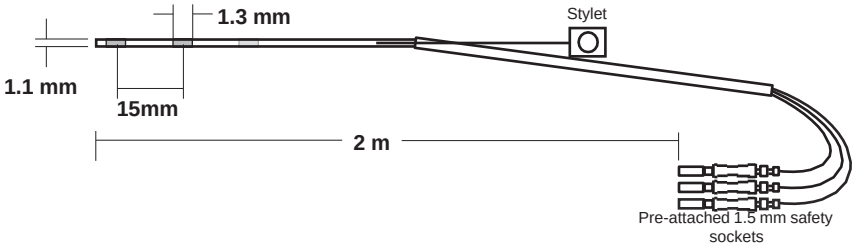

Standard and Reduced Diameter Depth Electrodes

Catalog #: SD06R-SP05X-000
6-contact depth, 5mm spacing, 27mm recording area.

Catalog #: SD08R-SP05X-000
8-contact depth, 5mm spacing, 37mm recording area.

Catalog #: SD10R-SP05X-000
10-contact depth, 5mm spacing, 47mm recording area.

Catalog #: SD12R-SP05X-000 ✓
12-contact depth, 5mm spacing, 57mm recording area.

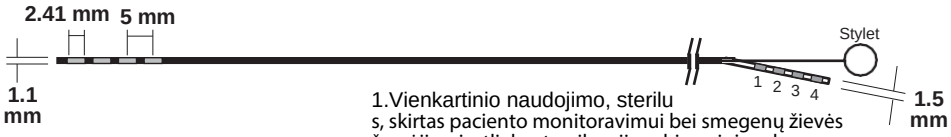

p.d.3.1. Giluminis EEG elektrodas.

1.Vienkartinio naudojimo, sterilu
s, skirtas paciento monitoravimui bei smegenų žievės žymėjimui, atliekant epilepsijos chirurginį gydymą;
2. 12-os EEG kontaktų, išdėstytų vienoje eilėje, vienodais tarpais;
3.Kontaktų grupės ilgis 57 mm, tarpai tarp kontaktų centrų 5 mm;
4. Kontaktų metalas – platina
5.EEG elektrodo skersmuo 1,1mm

Catalog #: RD10R-SP05X-000
10-contact depth, 5mm spacing, 47mm recording area.

Catalog #: RD10R-SP04X-000
10-contact depth, 4mm spacing, 38mm recording area.

Catalog #: RD10R-SP03X-000
10-contact depth, 3mm spacing, 29mm recording area.

AD-TECH® LIGHTWEIGHT ELECTRODE CONNECTION SYSTEMS

- Lightweight & flexible.
- 1.8 meter (6 feet) length - additional cable lengths available.
- Quick disconnect option available.

Lightweight *CABRIO* Connection System

CABRIO® Connection System

p.d.~~1~~.2 Juostelinio EEG elektrodo pajungimo kabelis
1. Daugkartinio naudojimo, skirtas 1~~.1~~ poz. nurodyto juostelinio elektrodo pajungimui prie elektroencefalo-grafijos aparato;
2. Su apsaugotomis, 1,5 mm vidinio diametro jungtimis (DIN standarto);
3. Kabelio su jungtimis ilgis 180 cm.

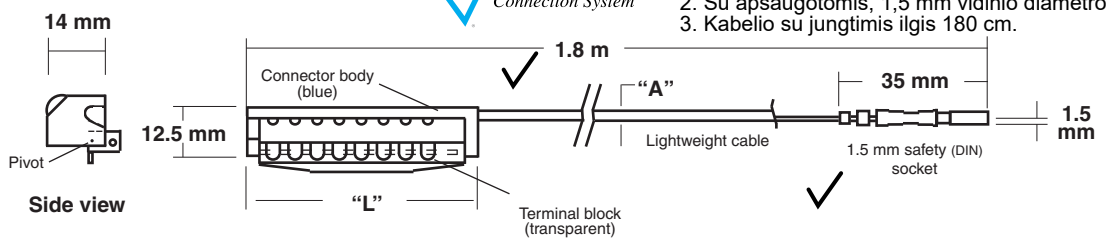

Catalog #	Description	Terminal Configuration	Dimension "L"	Cable Diameter "A"
L-SRL-4DIN	4-contact lightweight CABRIO connector/cable	1 terminal of 4	34 mm	2.21 mm
L-SRL-6DIN	6-contact lightweight CABRIO connector/cable	1 terminal of 6	44 mm	2.67 mm
L-SRL-8DIN	8-contact lightweight CABRIO connector/cable	1 terminal of 8	54 mm	2.67 mm
L-SRL-9DIN	9-contact lightweight CABRIO connector/cable	1 terminal of 9	64 mm	3.23 mm
L-SRL-10DIN	10-contact lightweight CABRIO connector/cable	1 terminal of 10	64 mm	3.23 mm
L-SRL-12BDIN	12-contact lightweight CABRIO connector/cable	1 terminal of 12	94 mm	3.76 mm
L-SRL-16BDIN	16-contact lightweight CABRIO connector/cable	1 terminal of 16	94 mm	3.76 mm
L-SRL-20DIN	20-contact lightweight CABRIO connector/cable	2 terminals of 10	64 mm	2 x 3.23 mm
L-SRL-32BDIN	32-contact lightweight CABRIO connector/cable	2 terminals of 16	94 mm	2 x 3.76 mm
L-SRL-48BDIN	48-contact lightweight CABRIO connector/cable	3 terminals of 16	94 mm	3 x 3.76 mm
L-SRL-64BDIN	64-contact lightweight CABRIO connector/cable	4 terminals of 16	94 mm	4 x 3.76 mm

Lightweight *TECH-ATTACH* Connection System

TECH ATTACH® Connection System

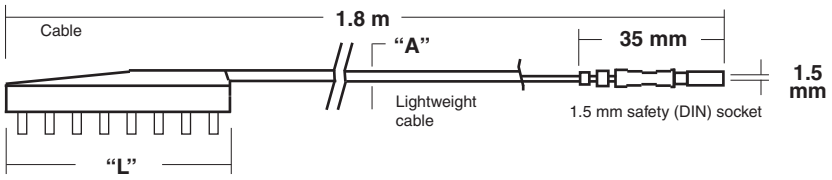

Catalog #	Description	Terminal Configuration	Dimension "L"	Cable Diameter "A"
L-DCL-4DIN	4-contact lightweight TECH-ATTACH cable	1 terminal of 4	34 mm	2.21 mm
L-DCL-6DIN	6-contact lightweight TECH-ATTACH cable	1 terminal of 6	44 mm	2.67 mm
L-DCL-8DIN	8-contact lightweight TECH-ATTACH cable	1 terminal of 8	54 mm	2.67 mm
L-DCL-9DIN	9-contact lightweight TECH-ATTACH cable	1 terminal of 9	64 mm	3.23 mm
L-DCL-10DIN	10-contact lightweight TECH-ATTACH cable	1 terminal of 10	64 mm	3.23 mm
L-DCL-12BDIN	12-contact lightweight TECH-ATTACH cable	1 terminal of 12	94 mm	3.76 mm
L-DCL-16BDIN	16-contact lightweight TECH-ATTACH cable	1 terminal of 16	94 mm	3.76 mm
L-DCL-20DIN	20-contact lightweight TECH-ATTACH cable	2 terminals of 10	64 mm	2 x 3.23 mm
L-DCL-32BDIN	32-contact lightweight TECH-ATTACH cable	2 terminals of 16	94 mm	2 x 3.76 mm
L-DCL-48BDIN	48-contact lightweight TECH-ATTACH cable	3 terminals of 16	94 mm	3 x 3.76 mm
L-DCL-64BDIN	64-contact lightweight TECH-ATTACH cable	4 terminals of 16	94 mm	4 x 3.76 mm

- Lightweight *CABRIO* and TECH-ATTACH cables are supplied with 1.5 mm safety sockets. Where not prohibited by law, alternative termination options are available upon request. Non-sterile; sterilize via EtO (EO) or Sterrad. All lightweight TECH-ATTACH cables require the use of disposable connector blocks.