


HTO PLATE


Surgical Instructions

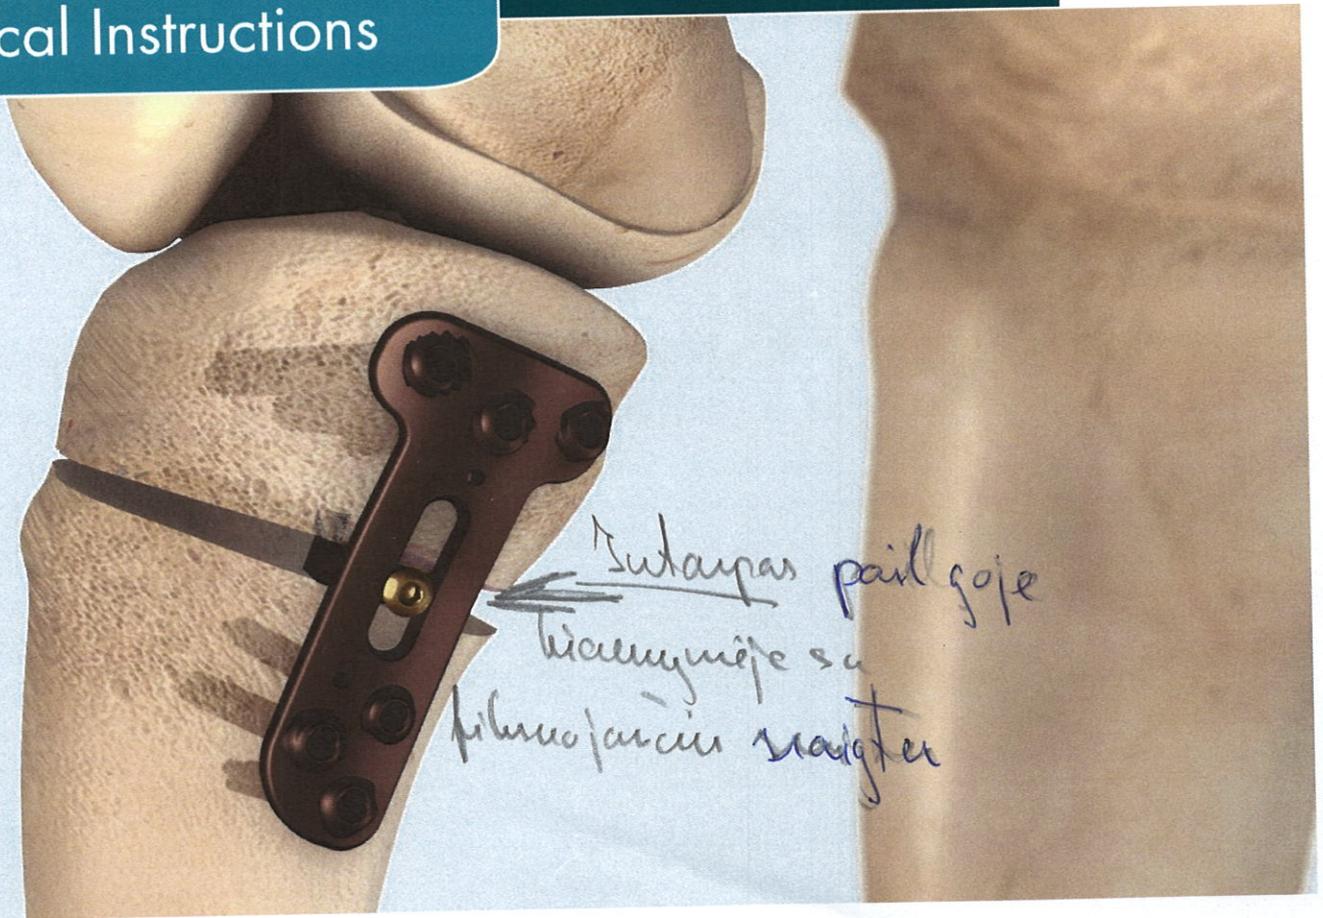

1. Angle stable HighTibialOsteotomy Plate
for screws 6.0
Atvino karygo osteotomine "T" formos uvalinama
HTO (high tibial osteotomy) plohteli

Angle stable Königsee HTO plate

for Ø 4.5/6.0 screws; large fragment; titanium; set no. 19.357.00

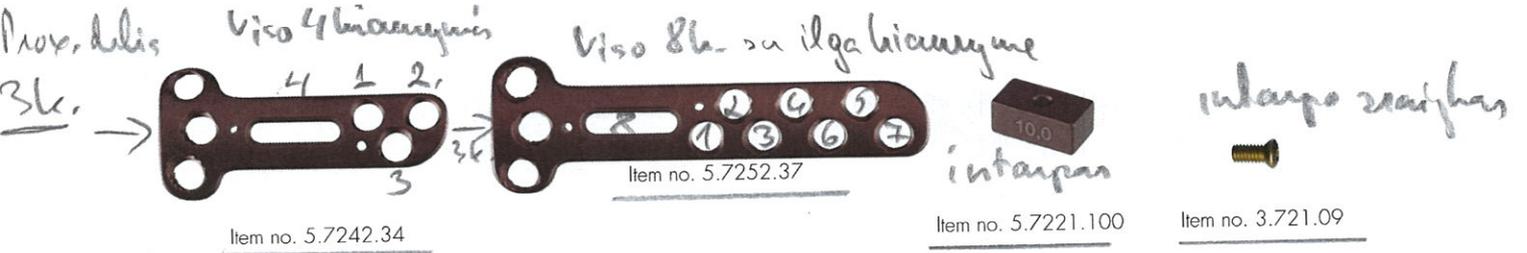

Item no. Designation

Königsee HTO plate medial with conical thread Ø 4.5 mm/6.0 mm; titanium

| Item no. | Designation | Notes |
|----------------|---------------------------------------|---------------------------|
| 1.1. 5.7242.34 | 3/4 hole; length 63 mm x 17 mm; right | 4 käänt., L 63 mm, Desine |
| 1.2. 5.7242.37 | 3/7 hole; length 93 mm x 17 mm; right | 7 käänt., L 93 mm, Desine |
| 1.1. 5.7252.34 | 3/4 hole; length 63 mm x 17 mm; left | 4 käänt., L 63 mm, Kairi |
| 1.2. 5.7252.37 | 3/7 hole; length 93 mm x 17 mm; left | 7 käänt., L 93 mm, Kairi |

| Item no. | Designation | Dimensions |
|----------------|---|------------------|
| 1.1. 5.7221.50 | Spacer for Königsee HTO plate; titanium | 8.0 mm x 5.0 mm |
| 5.7221.75 | | 8.0 mm x 7.5 mm |
| 5.7221.100 | | 8.0 mm x 10.0 mm |
| 5.7221.125 | | 8.0 mm x 12.5 mm |
| 5.7221.150 | | 8.0 mm x 15.0 mm |

| Item no. | Designation | Dimensions |
|---------------|-----------------------------------|--------------|
| 1.1. 3.721.09 | Fixing screw for spacer; titanium | M 4 x 9.0 mm |

Angle stable Königsee HTO plate set

for Ø 4.5/6.0 screws; large fragment; titanium; set no. 19.357.00



Item no. 5.7252.34




Item no. 5.7221.100



Item no. 5.7252.37



Item no. 3.721.09

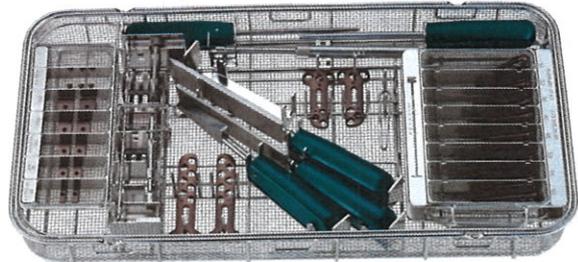

Set no. 19.357.00 Internal hexagon

| Item no. | Designation | Quantity |
|--|---------------------------------------|----------|
| Implants - plates | | |
| Königsee HTO plate medial with conical thread Ø 4.5/6.0 mm; titanium | | |
| 5.7242.34 | 3/4 hole; length 63 mm x 17 mm; right | 1 |
| 5.7252.34 | 3/4 hole; length 63 mm x 17 mm; left | 1 |
| 5.7242.37 | 3/7 hole; length 93 mm x 17 mm; right | 1 |
| 5.7252.37 | 3/7 hole; length 93 mm x 17 mm; left | 1 |

poz. 1.4.1 - 1.4.8. →

| Item no. | Designation | Quantity |
|--|------------------|----------|
| Spacer for Königsee HTO plate; titanium | | |
| 5.7221.50 | 8.0 mm x 5.0 mm | 2 |
| 5.7221.75 | 8.0 mm x 7.5 mm | 2 |
| 5.7221.100 | 8.0 mm x 10.0 mm | 2 |
| 5.7221.125 | 8.0 mm x 12.5 mm | 2 |
| 5.7221.150 | 8.0 mm x 15.0 mm | 2 |

| Item no. | Designation | Quantity |
|--|--------------|----------|
| Fixing screw for spacer; titanium | | |
| 3.721.09 | M 4 x 9.0 mm | 3 |


| Item no. | Designation | Quantity |
|--|--------------|----------|
| Implants - screws | | |
| Cortical screw with conical head thread Ø 4.5 mm; fully threaded self-tapping; titanium <i>titanium</i> Internal hexagon <i>Ø 4,5 kat. uciak zarybai</i> | | |
| 3.545.30 | Length 30 mm | 5 |
| 3.545.32 | Length 32 mm | 5 |
| 3.545.36 | Length 36 mm | 5 |
| 3.545.40 | Length 40 mm | 5 |
| 3.545.45 | Length 45 mm | 5 |
| 3.545.50 | Length 50 mm | 3 |
| 3.545.55 | Length 55 mm | 3 |
| 3.545.60 | Length 60 mm | 3 |


Ø 6,0 uciak uciak poz. 904 zarybai

| Item no. | Designation | Quantity |
|--|--------------|----------|
| Cancellous screw with conical head thread Ø 6.0 mm; fully threaded self-tapping; titanium <i>titanium</i> Internal hexagon | | |
| 3.163.40 | Length 40 mm | 3 |
| 3.163.45 | Length 45 mm | 3 |
| 3.163.50 | Length 50 mm | 3 |
| 3.163.55 | Length 55 mm | 5 |
| 3.163.60 | Length 60 mm | 5 |
| 3.163.65 | Length 65 mm | 5 |
| 3.163.70 | Length 70 mm | 5 |
| 3.163.75 | Length 75 mm | 5 |
| 3.163.80 | Length 80 mm | 5 |

poz. 1.3.1. ↑ ↓ 1.3.9

20/1
mm

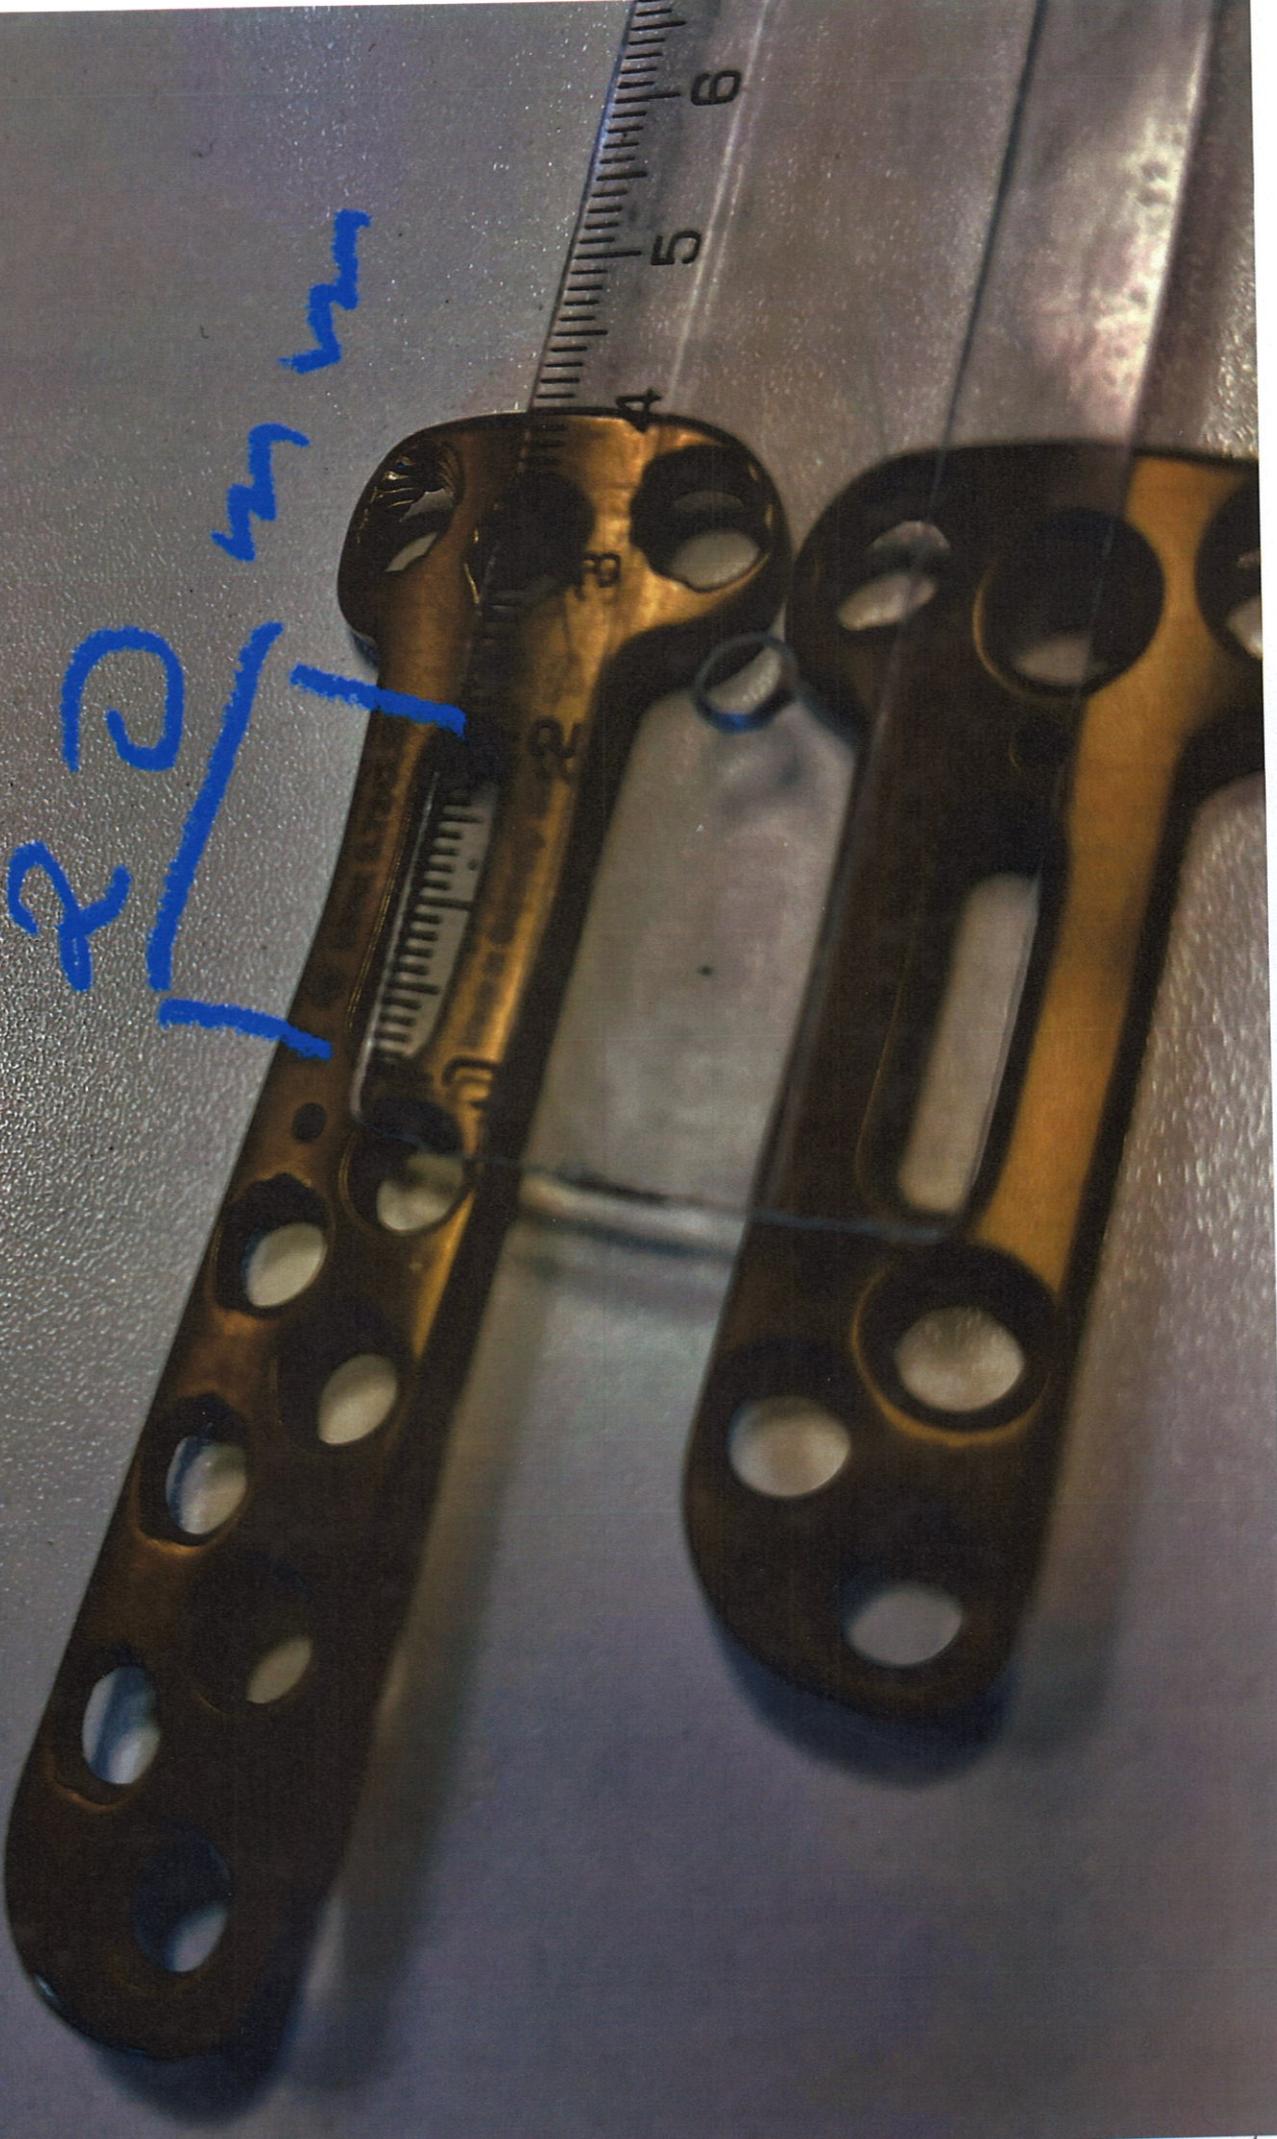

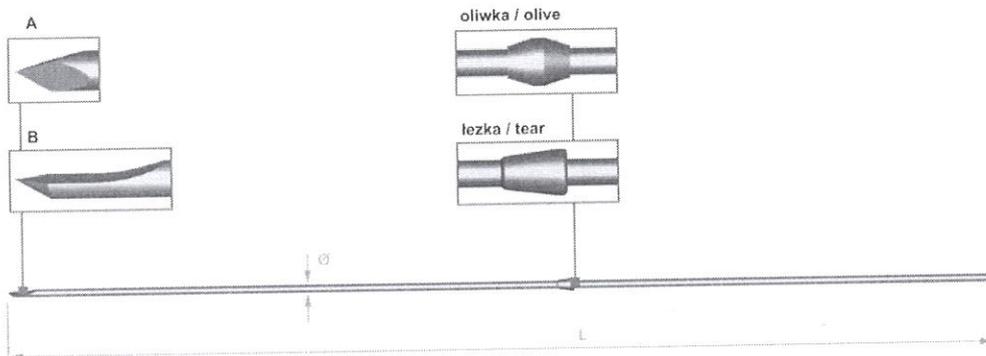

GWOŹDŹ KOSTNY Z OGRANICZNIKIEM
BONE NAIL WITH LIMITER

| L (mm) | Ø (mm) | OSTRZE BLADE | OLIWKA OLIVE | LEŻKA TEAR |
|--------|--------|-----------------|-----------------|---------------|
| 330 | 1,5 | A | X-06-68-01 | X-06-69-01 |
| 330 | 1,8 | A | X-06-68-02 | X-06-69-02 |
| 330 | 2,0 | A | X-06-68-03 | X-06-69-03 |
| 330 | 2,5 | A | X-06-68-04 | X-06-69-04 |
| 380 | 1,5 | A | X-06-68-05 | X-06-69-05 |
| 380 | 1,8 | A | X-06-68-06 | X-06-69-06 |
| 380 | 2,0 | A | X-06-68-07 | X-06-69-07 |
| 380 | 2,5 | A | X-06-68-08 | X-06-69-08 |
| 330 | 1,5 | B | X-06-68-11 | X-06-69-11 |
| 330 | 1,8 | B | X-06-68-12 | X-06-69-12 |
| 330 | 2,0 | B | X-06-68-13 | X-06-69-13 |
| 330 | 2,5 | B | X-06-68-14 | X-06-69-14 |
| 380 | 1,5 | B | X-06-68-15 | X-06-69-15 |
| 380 | 1,8 | B | X-06-68-16 | X-06-69-16 |
| 380 | 2,0 | B | X-06-68-17 | X-06-69-17 |
| 380 | 2,8 | B | X-06-68-18 | X-06-69-18 |



DRUT DO CERKLARZU L=5 m
WIRE FOR CERCLAGE L=5 m

5 m
3. Antykorozyjne włó

| Ø (mm) | miękki soft | twardy hard |
|--------|----------------|----------------|
| 0,2 | X-06-90-02 | X-06-91-02 |
| 0,3 | X-06-90-03 | X-06-91-03 |
| 0,4 | X-06-90-04 | X-06-91-04 |
| 0,5 | X-06-90-05 | X-06-91-05 |
| 0,6 | X-06-90-06 | X-06-91-06 |
| 0,7 | X-06-90-07 | X-06-91-07 |
| 0,8 | X-06-90-08 | X-06-91-08 |
| 0,9 | X-06-90-09 | X-06-91-09 |
| 1,0 | X-06-90-10 | X-06-91-10 |
| 1,2 | X-06-90-12 | X-06-91-12 |
| 1,5 | X-06-90-15 | X-06-91-15 |

DRUT DO CERKLARZU PROSTY Z OCZKIEM
WIRE FOR CERCLAGE WITH EYE

| L (mm) | Ø (mm) | Hr kat. |
|--------|--------|--------------|
| 280 | 8,0 | X-06-142-280 |
| 280 | 1,0 | X-06-143-280 |
| 280 | 1,2 | X-06-144-280 |
| 280 | 1,5 | X-06-145-280 |
| 350 | 1,0 | X-06-143-350 |
| 350 | 1,2 | X-06-144-350 |
| 350 | 1,5 | X-06-145-350 |
| 600 | 1,0 | X-06-143-600 |
| 600 | 1,2 | X-06-144-600 |
| 600 | 1,5 | X-06-145-600 |