

MADE IN ITALY



## INDUSTRIAL range



## CUBE

Eil.Nr.2 **Oil-injected rotary screw compressors with direct transmission**

Fixed speed  
4 - 7.5 kW



**NEW**

# CUBE

SILENT ROTARY SCREW COMPRESSOR

MADE IN ITALY

Renewed design, same performance.

Electric cabinet

Radiator

Air filter

Radial fan

Oil separator filter

IR10

Intake regulator

Separator block

Oil discharge

Oil separator tank

Oil filter

Emergency button

ETMII controller

Thermoformed protective cover

Dryer control unit

Eil.Nr.3 (2vnt. komresorku)  
(2vnt. varikliu)

Electric motor

FS26TFC  
air-end

Dryer with controller and  
dedicated power supply

ELECTRONIC  
CONTROLLER



Eil.Nr.2

Eil.Nr.2 **ETMII**

Electronic controller with backlit multi-function display; the menu is alphanumeric.

#### Measures and displays:

- ▶ Operating pressure (load / no-load);
- ▶ Oil temperature;
- ▶ Total operation hours;
- ▶ Load operation hours;

- ▶ Four maintenance timers (air filter, oil, oil filter, separator filter);
- ▶ Auto-restart after power failure.
- ▶ Programmable cooling fan temperature.
- ▶ Programmable remote control starting of the compressor.
- ▶ Integrated phase sequence relay.



#### Galvanised tank

CUBE is also available with a 270-lt galvanised tank.

# The compact, reliable, silent, direct drive transmission screw compressor.


only 63 dB(A)

all-in-one

4÷7.5 kW

10 Bar

with continuously operation



## Excellent performance

The CUBE range has always been a benchmark in the industrial compressed air sector.

As a result of the gearless coaxial drive system, all the power of the electric motor is transferred to the air-end without losing efficiency and ensuring top operating reliability.

CUBE compressors are designed to run continuously under the most severe conditions of use, with special attention to energy consumption, quiet operation, reduced operating and maintenance costs, and ease of installation and use.

## Dryer included

The "ES" version has the refrigerated dryer entirely enclosed within the main cabinet while maintaining the same shape and dimensions of the machine.


It is immediately ready for operation, without any additional installation costs. The dryer ensures the production of dried air, which is essential for preserving the systems and the quality of the end product. It enables excellent performance, even in unfavourable environmental conditions and high inlet temperatures.

## Simplified maintenance

Routine maintenance parts are easily accessible and simple to replace, ensuring long service intervals and keeping maintenance costs low.



FS 26TFC with highly efficient operation

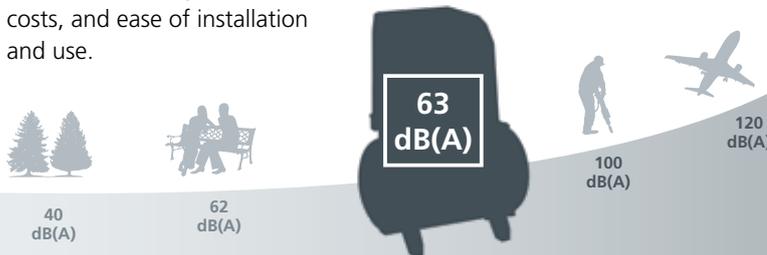

**PLUG&PLAY**  
CUBE is ready for use: it is supplied already equipped with RotarECOFLUID mineral oil.

	Model	Code	l	Power supply		Air outflow rate			MAX		dB(A)	BSP	kg	L x W x H (mm)		kg	L x W x H (mm)	
				kW	HP	V / Ph / Hz	l/min.	m <sup>3</sup> /min.	c.f.m.	bar				psi	L		W	H
R MOUNTED	CUBE 4.0-10	V51PD92FNM443	-	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	98	650x580x750	109	720x670x970	
	CUBE 4.0-10 ES	V51PD92FNM543	-	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	119	650x580x750	130	720x670x970	
	CUBE 5.5-10	V51PE92FNM443			7.5	400/3/50	7		2		45			100	650x580x750	111	720x670x970	
	CUBE 5.5-10 ES	V51PE92FNM543	Eil.Nr.7		7.5	400/3/50	7	Eil.Nr.4	2	Eil.Nr.6	45	Eil.Nr.10		121	650x580x750	132	720x670x970	
Eil.Nr.1	CUBE 7.5-10	V51PO92FNM643	-	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	112	650x580x750	123	720x670x970	
	CUBE 7.5-10 ES	V51PO92FNM743	-	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	Eil.Nr.11	800x750	144	720x670x970	
PAINTED TANK	CUBE 4.0-10-270	V91PD92FNM201	270	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"		500x1450	210	1320x850x1720	
	CUBE 4.0-10-270 ES	V91PD92FNM301	270	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	203	1200x600x1450	231	1320x850x1720	
	CUBE 5.5-10-270	V91PE92FNM201	270	5.5	7.5	400/3/50	705	0.705	24.9	10	145	68	1/2"	182	1200x600x1450	210	1320x850x1720	
	CUBE 5.5-10-270 ES	V91PE92FNM301	270	5.5	7.5	400/3/50	705	0.705	24.9	10	145	68	1/2"	203	1200x600x1450	231	1320x850x1720	
	CUBE 7.5-10-270	V91PO92FNM201	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	194	1200x600x1450	222	1320x850x1720	
	CUBE 7.5-10-270 ES	V91PO92FNM301	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	215	1200x600x1450	243	1320x850x1720	
GALVANISED TANK	CUBE 7.5-10-500	V83PO92FNM401	500	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	239	2000x600x1450	279	2070x800x1680	
	CUBE 7.5-10-500 ES	V83PO92FNM501	500	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	260	2000x600x1450	300	2070x800x1680	
	CUBE 4.0-10-270 Z	V91PD92FNM401	270	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	182	1200x600x1450	210	1320x850x1720	
	CUBE 4.0-10-270 ES Z	V91PD92FNM501	270	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	203	1200x600x1450	231	1320x850x1720	
	CUBE 5.5-10-270 Z	V91PE92FNM401	270	5.5	7.5	400/3/50	705	0.705	24.9	10	145	68	1/2"	182	1200x600x1450	210	1320x850x1720	
	CUBE 5.5-10-270 ES Z	V91PE92FNM501	270	5.5	7.5	400/3/50	705	0.705	24.9	10	145	68	1/2"	203	1200x600x1450	231	1320x850x1720	
	CUBE 7.5-10-270 Z	V91PO92FNM401	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	194	1200x600x1450	222	1320x850x1720	
	CUBE 7.5-10-270 ES Z	V91PO92FNM501	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	215	1200x600x1450	243	1320x850x1720	

ES = with refrigerated dryer, Z = with galvanised tank

Reference conditions: air intake temperature 20°C (68°F) – atmospheric pressure 1 bar (14.5 p.s.i.). The airflow rate was measured at 9.5 bar for 10 bar models. The data and results were measured in accordance with standard ISO 1217. The sound level was measured in accordance with standard ISO 3744.



## A wide range of solutions for industrial applications:



### TERA

Oil-injected rotary screw compressors, with direct transmission without gears, at fixed or variable speed, and power values from 110 to 250 kW.

### K-MAX

Oil-injected rotary screw compressors, with direct transmission with or without gears, at fixed or variable speed, and power values from 5.5 to 90 kW.

### MiniCUBE

Direct-drive oil-injected fixed speed rotary screw compressors, with 2.2 kW power.

### MICRO - PLUS

Oil-injected rotary screw compressors, with belt transmission, at fixed or variable speed, and power values from 2.2 to 75 kW.

### OS Scroll

Oil-free compressors with scroll spiral pumping units, at fixed speed, and power values from 2.2 to 30 kW.

### AIR TREATMENT

Driers, filters, vertical tanks and a wide range of accessories for compressed air treatment.

# Protect your investment, extend the Warranty up to **5** years!



When installing your new Fini screw compressor, join the "Trust" Warranty 3- to 5-year extension program to benefit from countless advantages by maximising the effectiveness, safety, and value over time of your investment.

Thanks to scheduled maintenance programs, exclusively performed by Fini Authorised Assistance Centres, you can rely on a timely, highly professional service, as well as on the use of only original spare parts guaranteed by the FSN brand.

The "Trust" warranty can be easily extended online through EasyConnect, the new Fini service portal specially created to simplify customers' lives by providing them with quick, clear responses about product availability, order management, and goods shipping times.

*Faster than you think*  
**EasyConnect**

YOUR WEB PORTAL SERVICES. OUR FUTURE.



### FNA S.p.A.

Registered and production office: Via Einaudi, 6 - 10070 Robassomero (TO) - Italy

Production plant: Via Toscana, 21 - 40069 Zola Predosa (BO) - Italy

Foreign sales office: Tel. +39 011 9233000 - Fax: +39 011 9241138

Sales office for Italian market: Tel.: +39 051 6168111 - Fax: +39 051 752408

[www.finicompressors.com](http://www.finicompressors.com) - [info@fnacompressors.com](mailto:info@fnacompressors.com)

