


DISCHARGE PORT
14mm x 17mm SLOTTED BOLTING
CONFIGURATION FITS TO EITHER 1"
ANSI 125# FLANGE CONNECTION OR
PNIO 25mm DIN FLANGE CONNECTION

STANDARD ENCAPSULATED MUFFLER:
1" NPT EXHUST PORT FOR OPTIONAL
MUFFLER STYLES OR PIPING
EXHAUST AIR IN SUBMERGED
APPLICATIONS.

SUCTION PORT
14mm x 17mm SLOTTED BOLTING
CONFIGURATION FITS TO EITHER 1" ANSI 125#
FLANGE CONNECTION OR PNIO 25mm DIN
FLANGE CONNECTION

BOLT PATTERN IS
SYMMETRICAL ABOUT
CENTERLINES

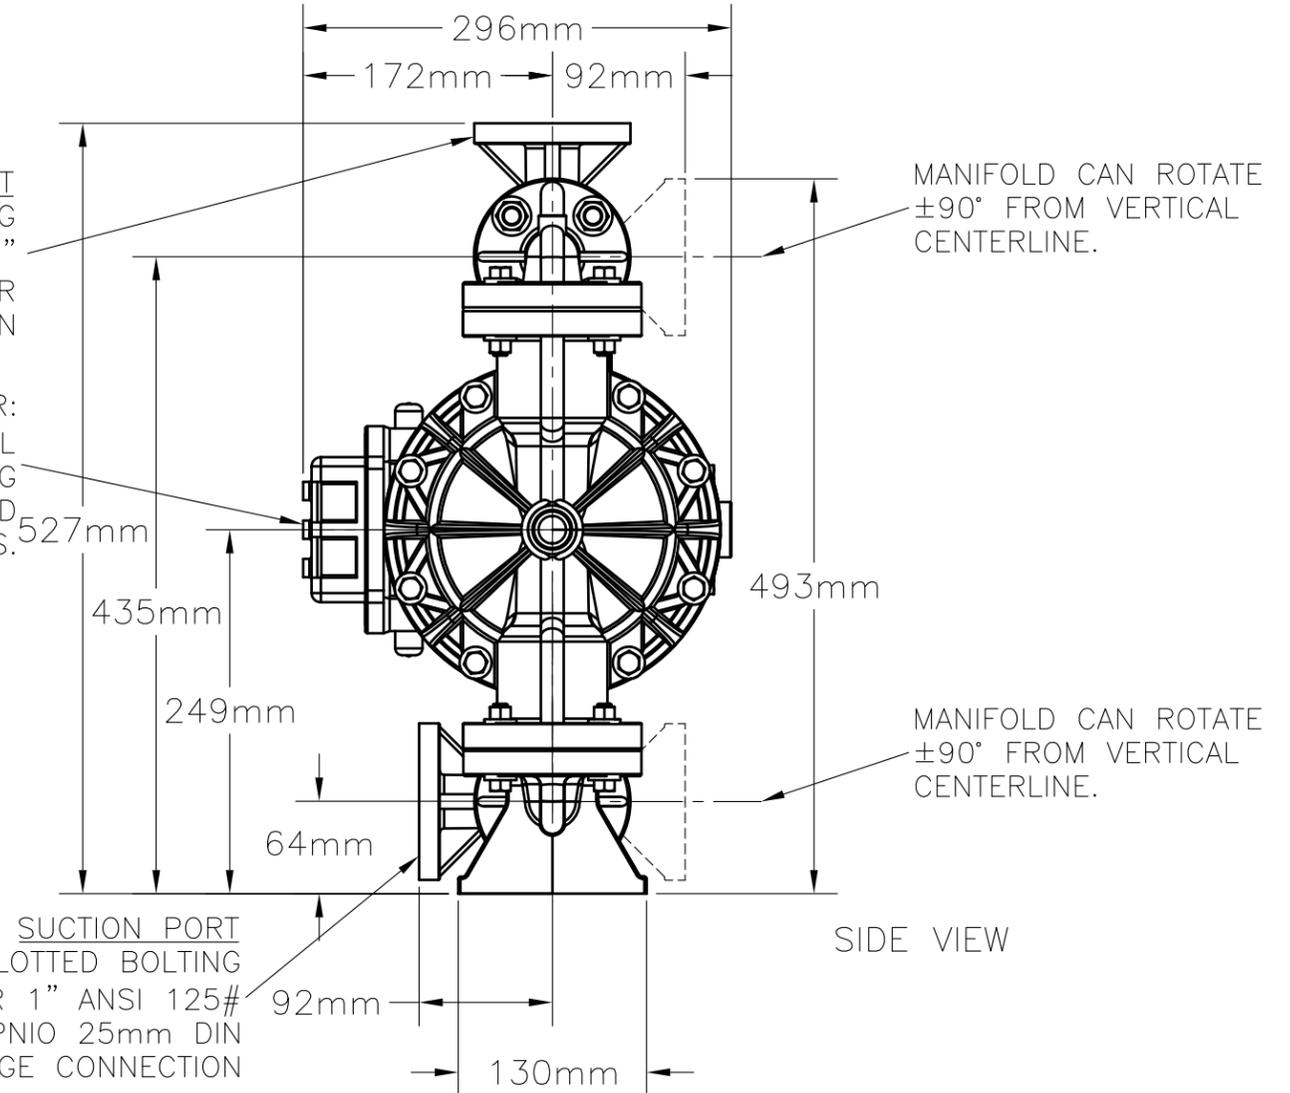

MANIFOLD CAN ROTATE
 $\pm 90^\circ$ FROM VERTICAL
CENTERLINE.

MANIFOLD CAN ROTATE
 $\pm 90^\circ$ FROM VERTICAL
CENTERLINE.

DIMENSIONAL TOLERANCE: $\pm 3\text{mm}$

ProMinent
Im Schuhmachergewann 5-11
D-69123 Heidelberg

VENDOR		1010796 DUODOS 25 PP 1010800 DUODOS 25 PVDF	FIRST USED:	TOLERANCES (EXCEPT AS NOTED)	DRAWN BY MF	DATE 6/13/12	SCALE: <i>NONE</i>
INSPECTION			REFERENCE:	DECIMAL .XX $\pm .010$.XXX $\pm .005$	APPROVED BY	DATE	CAD #:
MACHINE				FRACTIONAL $\pm 1/64$	TITLE <i>DIMENSIONAL OUTLINE</i>		
PURCHASING				ANGULAR $\pm 1/2^\circ$	DRAWING NUMBER <i>DUODOS 25</i>		REV.
PRODUCTION							
MANSFIELD							
SHANNON							
PRINT DIST.							