



ISO 13485: 2012 REGISTERED FIRM



SCW MEDICATH LTD.

Manufacture Add: No.4 Baolong 6th Road, Baolong Industrial Town, Longgang District, Shenzhen 518116, P.R. China

Tel: 0086 755 89312160 / 89312258

Fax: 0086 755 89312239

Email: sales@scw-medicath.com

[Http://www.scw-medicath.com](http://www.scw-medicath.com)



Version Number:En.A1.01



Interventional Products Catalogue

Since 1996





Contents

04	PTCA BALLOON CATHETER	17	INTRODUCER SETS
06	PTCA GUIDE WIRES	19	TRANSRADIAL INTRODUCER SETS
07	PTFE COATING GUIDE WIRES	21	PRESSURE BANDAGE / TOURNIQUET
08	HYDROPHILIC GUIDE WIRES	22	PEELABLE INTRODUCER SETS
09	GUIDE WIRES (NITINOL)	23	MANIFOLDS
11	GUIDE WIRES (STAINLESS STEEL)	25	DOSE-CONTROL SYRINGES
12	HEMOSTASIS VALVE SETS	26	COLORLED PISTON SPECIALTY SYRINGES
13	BALLOON INFLATION DEVICES	27	CONNECTING TUBINGS
15	RADIOLOGY ANGIOGRAPHIC CATHETER	28	INTRODUCER NEEDLES
16	CARDIOLOGY ANGIOGRAPHIC CATHETER		

Introduction


The main use of PTCA balloon catheter is through minimal invasive surgery (PTCA) to expand the patient's stenosis of coronary artery lesion, improve the myocardial blood flow. also can be used to transport the release Stent to the coronary artery stenosis lesions.



PTCA BALLOON CATHETER

Features

- RX PTFE coated Hypotube Design
- Excellent Hydrophilic coating
- Enhanced Pushability & Lesion Pressure
- Enhanced Average Burst pressure
- 0.016" Tip profile
- Atraumatic Tapered soft Tip

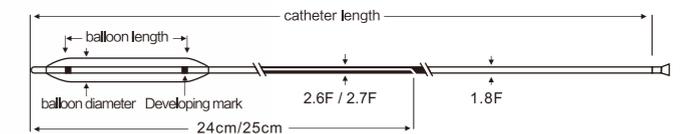

SEMI-COMPLIANT

Diameter (mm)	Balloon Lengths (mm) NP:8ATM,RBP:12ATM													
	10	12	15	18	20	22	24	25	27	30	32	35	40	42
1.00	42.13.08002	42.13.08003	42.13.08004		42.13.08005					42.13.08006				(CTO)
1.25	42.13.09002		42.13.09001		42.13.09003									(CTO)
1.50	42.13.01010	42.13.01011	42.13.01030	42.13.01031	42.13.01050	42.13.01051								
1.75	42.13.11001	42.13.11002	42.13.11003		42.13.11004		42.13.11005	42.13.11006		42.13.11007				
2.00	42.13.02010	42.13.02011	42.13.02030	42.13.02031	42.13.02050	42.13.02051	42.13.02052	42.13.02053	42.13.02054	42.13.02070		42.13.02071	42.13.02072	42.13.02073
2.25	42.13.12001	42.13.12002	42.13.12003	42.13.12004	42.13.12005	42.13.12006	42.13.12007	42.13.12008	42.13.12009	42.13.12010		42.13.12011	42.13.12012	42.13.12013
2.50	42.13.03010	42.13.03012	42.13.03030	42.13.03031	42.13.03050	42.13.03051	42.13.03052	42.13.03053	42.13.03054	42.13.03070	42.13.03071	42.13.03072	42.13.03073	42.13.03074
2.75	42.13.04010	42.13.04012	42.13.04030	42.13.04031	42.13.04050	42.13.04051	42.13.04052	42.13.04053	42.13.04054	42.13.04070	42.13.04071	42.13.04072	42.13.04073	42.13.04074
3.00	42.13.05010	42.13.05011	42.13.05030	42.13.05032	42.13.05050	42.13.05051	42.13.05052	42.13.05053	42.13.05054	42.13.05070	42.13.05071	42.13.05072	42.13.05073	42.13.05074
3.25	42.13.13001	42.13.13002	42.13.13003	42.13.13004	42.13.13005	42.13.13006	42.13.13007	42.13.13008	42.13.13009	42.13.13010	42.13.13011	42.13.13012	42.13.13013	42.13.13014
3.50	42.13.06010	42.13.06012	42.13.06030	42.13.06032	42.13.06050	42.13.06051	42.13.06052	42.13.06053	42.13.06054	42.13.06070	42.13.06071	42.13.06072	42.13.06073	42.13.06074
3.75	42.13.14001	42.13.14002	42.13.14003		42.13.14004		42.13.14005	42.13.14006		42.13.14007				
4.00	42.13.07010	42.13.07012	42.13.07030	42.13.07032	42.13.07050	42.13.07052	42.13.07053	42.13.07054	42.13.07055	42.13.07070	42.13.07071	42.13.07072	42.13.07073	42.13.07074
4.50	42.13.10002		42.13.10003	42.13.10004	42.13.10005	42.13.10006	42.13.10007	42.13.10008	42.13.10009	42.13.10010	42.13.10011	42.13.10012	42.13.10013	42.13.10014
5.00	42.13.15001		42.13.15002		42.13.15003									
6.00	42.13.16001		42.13.16002		42.13.16003									

NON-COMPLIANT

Diameter (mm)	Balloon Lengths (mm) NP:16ATM,RBP:20ATM						
	6	9	12	15	20	25	30
1.75			42.13.11008	42.13.11009			
2.00	42.13.02001	42.13.02002	42.13.02012	42.13.02032	42.13.02055	42.13.02056	42.13.02074
2.25	42.13.12014	42.13.12015	42.13.12016	42.13.12017	42.13.12018	42.13.12019	42.13.12020
2.50	42.13.03001	42.13.03002	42.13.03011	42.13.03032	42.13.03055	42.13.03056	42.13.03075
2.75	42.13.04001	42.13.04002	42.13.04013	42.13.04011	42.13.04055	42.13.04056	42.13.04075
3.00	42.13.05001	42.13.05002	42.13.05012	42.13.05031	42.13.05055	42.13.05056	42.13.05075
3.25	42.13.13015	42.13.13016	42.13.13017	42.13.13018	42.13.13019	42.13.13020	42.13.13021
3.50	42.13.06001	42.13.06002	42.13.06011	42.13.06031	42.13.06055	42.13.06056	42.13.06075
3.75			42.13.14008	42.13.14009			
4.00	42.13.07001	42.13.07002	42.13.07011	42.13.07031	42.13.07051	42.13.07056	42.13.07075
4.50	42.13.10015	42.13.10001	42.13.10017	42.13.10018	42.13.10019	42.13.10020	
5.00	42.13.15004	42.13.15005	42.13.15006	42.13.15007	42.13.15008		




PTCA GUIDE WIRES

www.scw-medcath.com

Features

- 3 mm PT Tip guarantees visibility during X-ray process
- Nitinol Core
- stainless steel with PTFE Coated on the shaft
- Flexibility and maneuverability

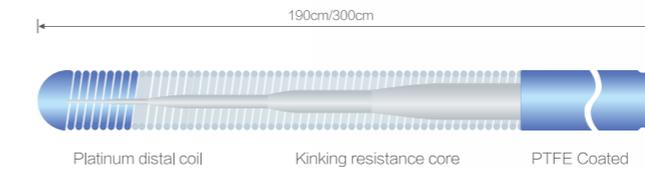

Product No.	Flexibility	Diameter	Tip Load(g)	Length(cm)	Tip Shape
42.01.30000	Super soft-Water snake waist	0.014"	0.7	190	Straight
42.01.30001	Super soft-Water snake waist	0.014"	0.7	190	Angled
42.01.30002	Super soft-Water snake waist	0.014"	0.7	300	Straight
42.01.30003	Super soft-Water snake waist	0.014"	0.7	300	Angled
42.01.30004	Soft	0.014"	3	190	Straight
42.01.30005	Soft	0.014"	3	190	Angled
42.01.30006	Soft	0.014"	3	300	Straight
42.01.30007	Soft	0.014"	3	300	Angled
42.01.30008	Medium-Crocodile Tail	0.014"	5	190	Straight
42.01.30009	Medium-Crocodile Tail	0.014"	5	190	Angled
42.01.30010	Medium-Crocodile Tail	0.014"	5	300	Straight
42.01.30011	Medium-Crocodile Tail	0.014"	5	300	Angled
42.01.30012	Stiff	0.014"	9	190	Straight
42.01.30013	Stiff	0.014"	9	190	Angled
42.01.30014	Stiff	0.014"	9	300	Straight
42.01.30015	Stiff	0.014"	9	300	Angled
42.01.30016	Super stiff-Rhino Horn	0.014"	12	190	Straight
42.01.30017	Super stiff-Rhino Horn	0.014"	12	190	Angled
42.01.30018	Super stiff-Rhino Horn	0.014"	12	300	Straight
42.01.30019	Super stiff-Rhino Horn	0.014"	12	300	Angled

PTFE COATING GUIDE WIRES



Features

- Coating: PTFE
- Core material: Stainless Steel

Dimentions	
OD Range	0.021"-0.038"
Length Range	50cm-300cm
J Radius	1.5mm-15mm

Pre-Coating


0.025"		0.032"		Product No.		Length (cm)	Tip form
		0.035"		0.038"			
42.01.10000	42.01.10004	42.01.10008	42.01.10012			150	Straight
42.01.10001	42.01.10005	42.01.10009	42.01.10014			150	J
42.01.10002	42.01.10006	42.01.10010	42.01.10015			260	Straight
42.01.10003	42.01.10007	42.01.10011	42.01.10016			260	J

HYDROPHILIC GUIDE WIRES



Features

- Hydrophilic coating provide excellent lubricity;
- Superelastic nitinol Wire core for kink resistance prevent guidewire kinking;
- Full length tapered core design for excellent torque transmission and flexibility;
- Special polymer cover the good radiopaque performance;

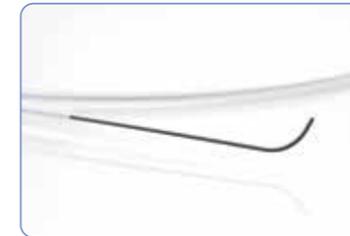

Dimentions	
OD Range	0.025"-0.038"
Length Range	80cm-300cm

Product No.	Diameter	Length(cm)	Shaft Stiffness	Tip form	Product No.	Diameter	Length(cm)	Shaft Stiffness	Tip form
42.01.20000	0.035"	150	Standard	Straight	42.01.20011	0.038"	150	Standard	Straight
42.01.20001	0.035"	150	Standard	Angled	42.01.20006	0.038"	150	Standard	Angled
42.01.20002	0.035"	180	Standard	Straight	42.01.20007	0.038"	180	Standard	Straight
42.01.20003	0.035"	180	Standard	Angled	42.01.20008	0.038"	180	Standard	Angled
42.01.20004	0.035"	260	Standard	Straight	42.01.20009	0.038"	260	Standard	Straight
42.01.20005	0.035"	260	Standard	Angled	42.01.20012	0.038"	260	Standard	Angled

GUIDE WIRES (NITINOL) I

Features

- Kink resistance
- Core material: Nitinol
- Polymer cover: None
- Coating: None

Dimensions	
OD Range	0.018"-0.050"
Length Range	10cm-300cm
J Radius	1.5mm-15mm



0.032"	Product No.	0.035"	0.038"	Length (cm)	Tip form
42.01.50000		42.01.50002	42.01.50004	45	Straight
42.01.50001		42.01.50003	42.01.50005	45	J
42.01.50006		42.01.50008	42.01.50010	60	Straight
42.01.50007		42.01.50009	42.01.50011	60	J
42.01.50012		42.01.50014	42.01.50016	70	Straight
42.01.50013		42.01.50015	42.01.50017	70	J
42.01.50018		42.01.50020	42.01.50022	150	Straight
42.01.50019		42.01.50021	42.01.50023	150	J

GUIDE WIRES (NITINOL) II

Features

- Wire Coil: Stainless steel
- Core: Nitinol
- Polymer cover: None
- Coating: None

Dimensions	
OD Range	0.018"-0.050"
Length Range	10cm-300cm
J Radius	1.5mm-15mm



Product No.	Diameter	Length(cm)	Tip form
42.01.70001	0.035"	45	Straight
42.01.70002	0.032"	60	Straight
42.01.70003	0.018"	150	J

GUIDE WIRES (stainless steel)

Features

- Wires Coil: Stainless Steel
- Standrad fixed core
- Coating: None

Dimentions	
OD Range	0.018"-0.050"
Length Range	10cm-300cm
J Radius	1.5mm-15mm



0.032"	Product No. 0.035"	0.038"	Length (cm)	Tip form
42.01.60000	42.01.60002	42.01.60004	45	Straight
42.01.60001	42.01.60003	42.01.60005	45	J
42.01.60006	42.01.60008	42.01.60010	60	Straight
42.01.60007	42.01.60009	42.01.60011	60	J
42.01.60012	42.01.60014	42.01.60016	70	Straight
42.01.60013	42.01.60015	42.01.60017	70	J
42.01.60018	42.01.60020	42.01.60022	150	Straight
42.01.60019	42.01.60021	42.01.60023	150	J

HEMOSTASIS VALVE SETS

Features

- Various types to meet the clinician's habits
- Pressure resistance and good sealing valve to reduce the blood loss.

Contents

- Hemostasis Valve
- Guide Wire Insertion Tool
- Torque Device

10 pd Y-jungtukas su vieno paspaudimo uždarymo/atidarymo hemostazine membrana. Lanksti prailginta praplovimo atšaka su trij kryp i kraniuku. Vielos vedimo adata. Metalinis (0,014 colio vielai) fiksatorius – suktukas.



11 pd Y-jungtukas su vienmomeniu paspaudimo/atititraukimo hemostazine membrana. Prailginta iki 20 cm. lanksti praplovimo atšaka su trij kryp i kraniuku. Vielos vedimo adata. Metalinis (0,014 colio vielai) fiksatorius – suktukas.

Product No.	Description	Product No.	Description
42.03.10000	Twist Y Connector	42.03.10006	Y Click Type with 25 cm extension line and stopcock
42.03.10001	Push pull Y Connector	42.03.10003	Push pull Y Connector with 45 cm extension line and stopcock
42.03.10004	Y Click Type	42.03.10012	Y click Connector with 45 cm extension line and stopcock:
42.03.10005	Twist Y Connector with 25 cm extension line and stopcock	42.03.10013	Push pull Y Connector with 25 cm extension line and stopcock

BALLOON INFLATION DEVICES

Features

- Accurate reading, reliable inflation and deflation.
- Modified humanized design handle facilitates doctor's operation.
- Locking design enables one handed operation in deflation.



**13 pd PTKA monometras (sl gis ne mažiau 30 atm.).
Vielos fiksatorius su metaliniu suktuku.**

**Y jungtukas su paspaudimo/atitraukimo hemostazine membrana ir prailginta nuo 20 cm iki 50 cm praplovimo atšaka su sij kryp i kraniuku.
Vielos vedimo adata. Vienoje sterilioje pakuot je.**

Product No.	Volume (ml)	Contents
42.04.30000	20	Balloon inflation device, Stopcock("RIGHT ON")
42.04.30001	20	Balloon inflation device, Stopcock("RIGHT OFF")
42.04.30002	30	Balloon inflation device, Stopcock("RIGHT ON")
42.04.30003	30	Balloon inflation device, Stopcock("RIGHT OFF")

Product No.	Volume (ml)	Contents
42.04.40000	20	Balloon inflation device, Stopcock("RIGHT ON")+ Hemostasis valve set (Twist)
42.04.40001	20	Balloon inflation device, Stopcock("RIGHT OFF")+ Hemostasis valve set (Twist)
42.04.40002	30	Balloon inflation device, Stopcock("RIGHT ON")+ Hemostasis valve set (Twist)
42.04.40003	30	Balloon inflation device, Stopcock("RIGHT OFF")+ Hemostasis valve set (Twist)

42.04.40012	20	Balloon inflation device, Stopcock("RIGHT ON")+Hemostasis valve set(Push Pull)
42.04.40013	20	Balloon inflation device, Stopcock("RIGHT OFF")+Hemostasis valve set(Push Pull)
42.04.40014	30	Balloon inflation device, Stopcock("RIGHT ON")+Hemostasis valve set(Push Pull)
42.04.40015	30	Balloon inflation device, Stopcock("RIGHT OFF")+Hemostasis valve set(Push Pull)

42.04.40004	20	Balloon inflation device, Stopcock("RIGHT ON")+Hemostasis valve set(Push Pull with 25cm extension line&stopcock)
42.04.40005	20	Balloon inflation device, Stopcock("RIGHT OFF")+Hemostasis valve set(Push Pull with 25cm extension line&stopcock)
42.04.40006	30	Balloon inflation device, Stopcock("RIGHT ON")+Hemostasis valve set(Push Pull with 25cm extension line&stopcock)
42.04.40007	30	Balloon inflation device, Stopcock("RIGHT OFF")+Hemostasis valve set(Push Pull with 25cm extension line&stopcock)

42.04.40026	20	Balloon inflation device, Stopcock("RIGHT OFF")+Hemostasis valve set(Twist type with 25cm extension line&stopcock)
42.04.40027	20	Balloon inflation device, Stopcock("RIGHT ON")+Hemostasis valve set(Twist type with 25cm extension line&stopcock)
42.04.40017	30	Balloon inflation device, Stopcock("RIGHT ON")+Hemostasis valve set(Twist type with 25cm extension line&stopcock)
42.04.40016	30	Balloon inflation device, Stopcock("RIGHT OFF")+Hemostasis valve set(Twist type with 25cm extension line&stopcock)

BALLOON INFLATION DEVICES

Introduction

SCW balloon inflation device provide reliable and accurate inflation for your most demanding cases. Ergonomically designed with accuracy and quality in mind, easy to control and finish the inflation and deflation procedures, SCW balloon inflation devices are also available in custom kit configuration.

Features

- Max Pressure: 30 Bar
- Accurate;
- Stable performance;
- Simple operation





Product No.	Volume (ml)	Contents
42.04.10000	20	Balloon inflation device, Stopcock("RIGHT ON")
42.04.10001	20	Balloon inflation device, Stopcock("RIGHT OFF")
42.04.20000	20	Balloon inflation device, Stopcock("Right ON")+Hemostasis Valve Set(Twist Type)
42.04.20001	20	Balloon inflation device, Stopcock("Right OFF")+Hemostasis Valve Set (Twist Type with 25cm Extension line & Stopcocks)
42.04.20002	20	Balloon inflation device, Stopcock("Right ON")+Hemostasis Valve Set(Push pull with 25cm Extension line & Stopcocks)
42.04.20003	20	Balloon inflation device, Stopcock("Right OFF")+Hemostasis Valve Set(Push pull with 25cm Extension line & Stopcocks)

RADIOLOGY ANGIOGRAPHIC CATHETER

Features

- Large inner diameter for high flow rate of contrast media.
- Flexible material have excellent support and shape memory.
- Braided catheter construction allows for good torqueability and excellent kink resistant capacity.
- Soft tip will protect vessel from damage.

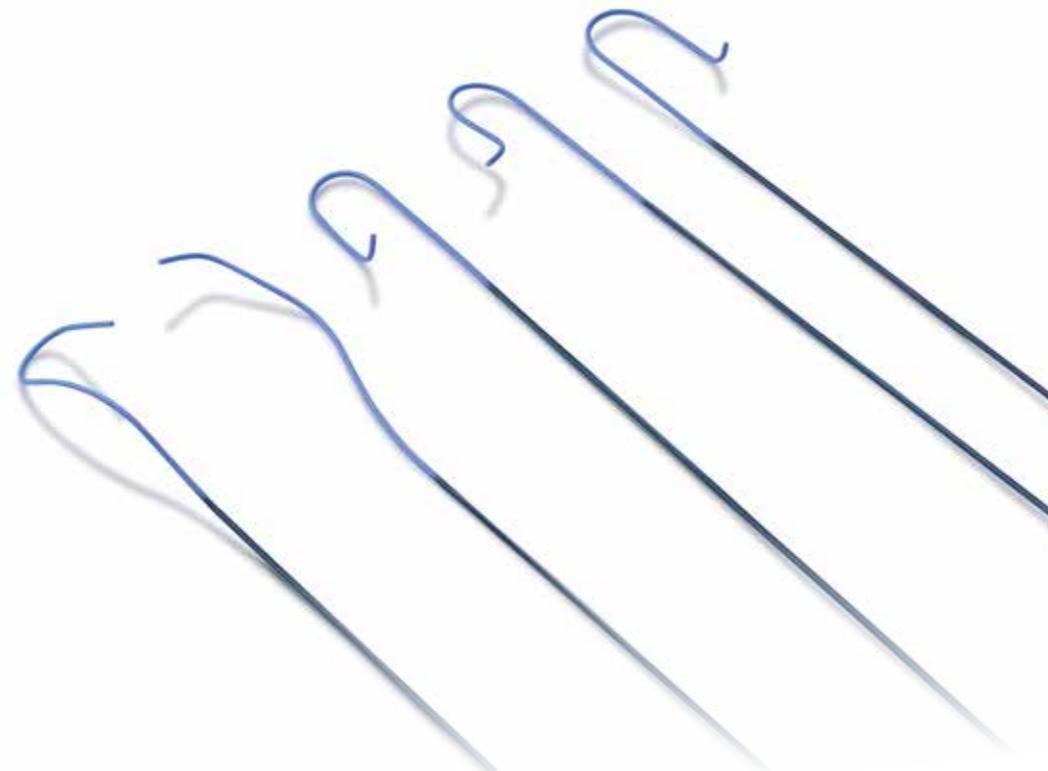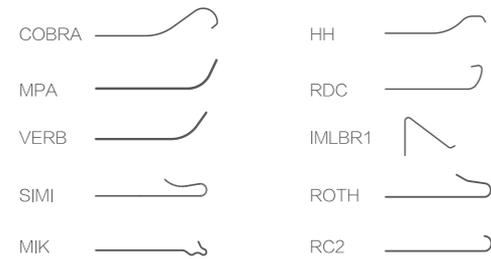

RH ANGIOGRAPHIC CATHETER

Product No.	French	Catheter ID	Guidewire	Length(cm)
42.08.20000	4F	0.042"	0.038"	80
42.08.20001	5F	0.046"	0.038"	80
42.08.20002	6F	0.054"	0.038"	80

YAS ANGIOGRAPHIC CATHETER

Product No.	French	Catheter ID	Guidewire	Length(cm)
42.08.20003	4F	0.042"	0.038"	80
42.08.20004	5F	0.046"	0.038"	80
42.08.20005	6F	0.054"	0.038"	80

RS ANGIOGRAPHIC CATHETER

Product No.	French	Catheter ID	Guidewire	Length(cm)
42.08.20006	4F	0.042"	0.038"	80
42.08.20007	5F	0.046"	0.038"	80
42.08.20008	6F	0.054"	0.038"	80


RGL ANGIOGRAPHIC CATHETER

Product No.	French	Catheter ID	Guidewire	Length(cm)
42.08.20009	4F	0.042"	0.038"	80
42.08.20010	5F	0.046"	0.038"	80
42.08.20011	6F	0.054"	0.038"	80

CARDIOLOGY ANGIOGRAPHIC CATHETER

Features

- Large inner diameter for high flow rate of contrast media.
- Flexible material have excellent support and shape memory.
- Braided catheter construction allows for good torqueability and excellent kink resistant capacity.
- Soft tip will protect vessel from damage.

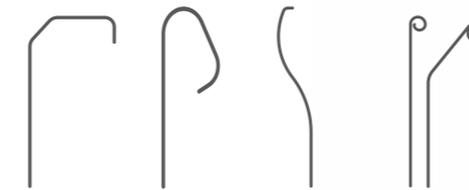

Product No.	Fr.	Configuration	Length (cm)	Product No.	Fr.	Configuration	Length (cm)	Product No.	Fr.	Configuration	Length (cm)
42.08.10000	5F	JL3.5	100	42.08.10004	5F	JL5.5	100	42.08.10007	6F	JL4.5	100
42.08.10001	5F	JL4.0	100	42.08.10005	6F	JL3.5	100	42.08.10008	6F	JL5.0	100
42.08.10002	5F	JL4.5	100	42.08.10006	6F	JL4.0	100	42.08.10009	6F	JL5.5	100
42.08.10003	5F	JL5.0	100								

42.08.10010	5F	JR3.5	100	42.08.10014	5F	JR5.5	100	42.08.10017	6F	JR4.5	100
42.08.10011	5F	JR4.0	100	42.08.10015	6F	JR3.5	100	42.08.10018	6F	JR5.0	100
42.08.10012	5F	JR4.5	100	42.08.10016	6F	JR4.0	100	42.08.10019	6F	JR5.5	100
42.08.10013	5F	JR5.0	100								

42.08.10020	5F	180° Straight	110	42.08.10021	6F	180° Straight	110				
42.08.10022	5F	145° Angled	110	42.08.10023	6F	145° Angled	110				

TIG

Product No.	Fr.	Length (cm)	Product No.	Fr.	Length	Product No.	Fr.	Length (cm)			
42.08.10024	4F	TIG	100	42.08.10025	5F	TIG	100	42.08.10026	6F	TIG	100



INTRODUCER SETS

Features

- Small OD and large ID minimizes the size of the access site without compromising ease of device passage.
- Seamless guide wire to dilator and dilator to sheath transition reduces risks of gaps and arterial damage.
- * We can supply kink resistance nitinol guide wire to increase clinician confidence

Contents

- Femoral Introducer Sheath+ dilator
- Syringe
- Guide Wire
- introducer needle
- Scapel

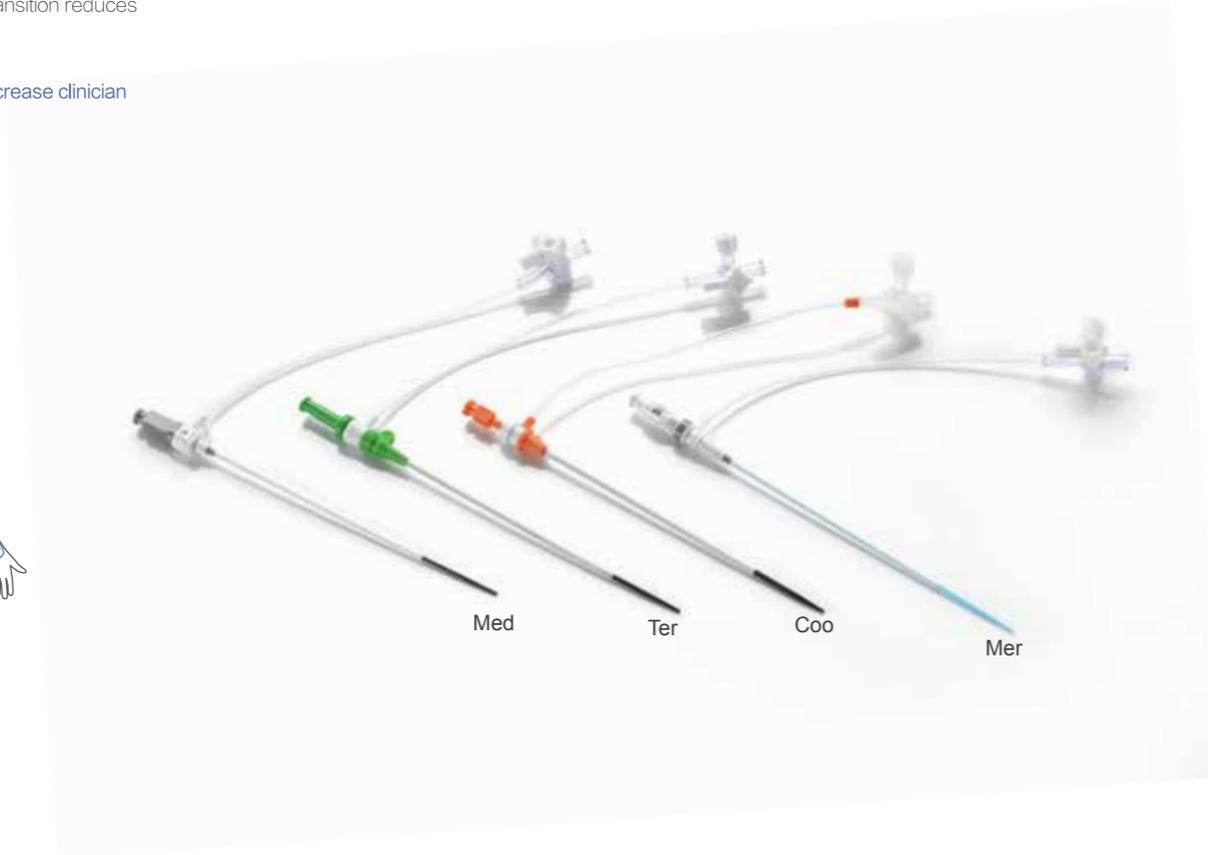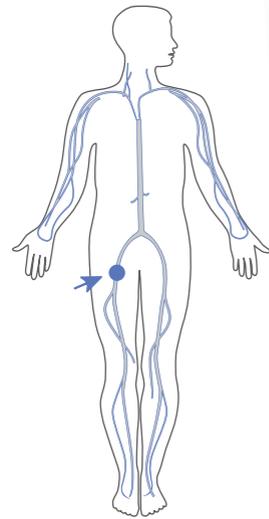

TWIST TYPE-Med

Product No.	Size(Fr.)	length(cm)	Guidewire	Introducer Needle	Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introducer Needle
42.09.10000	4	9	0.021**45cm J	20G x 3.8 cm	42.09.10007	4	19	0.021**60cm J	20G x 3.8 cm
42.09.10001	5	11	0.038**45cm J	18G x 6.5 cm	42.09.10008	5	23	0.038**60cm J	18G x 6.5 cm
42.09.10002	6	11	0.038**45cm J	18G x 6.5 cm	42.09.10009	6	23	0.038**60cm J	18G x 6.5 cm
42.09.10003	7	11	0.038**45cm J	18G x 6.5 cm	42.09.10010	7	23	0.038**60cm J	18G x 6.5 cm
42.09.10004	8	11	0.038**45cm J	18G x 6.5 cm	42.09.10011	8	23	0.038**60cm J	18G x 6.5 cm
42.09.10005	9	11	0.038**45cm J	18G x 6.5 cm	42.09.10012	9	23	0.038**60cm J	18G x 6.5 cm
42.09.10006	10	11	0.038**45cm J	18G x 6.5 cm	42.09.10013	10	23	0.038**60cm J	18G x 6.6 cm

CLICK TYPE-Ter

Product No.	Size(Fr.)	length(cm)	Guidewire	Introducer Needle	Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introducer Needle
42.09.20000	4	9	0.021**45cm J	20G x 3.8 cm	42.09.20005	4	19	0.021**60cm J	20G x 3.8 cm
42.09.20001	5	11	0.038**45cm J	18G x 6.5 cm	42.09.20006	5	23	0.038**60cm J	18G x 6.5 cm
42.09.20002	6	11	0.038**45cm J	18G x 6.5 cm	42.09.20007	6	23	0.038**60cm J	18G x 6.5 cm
42.09.20003	7	11	0.038**45cm J	18G x 6.5 cm	42.09.20008	7	23	0.038**60cm J	18G x 6.5 cm
42.09.20004	8	11	0.038**45cm J	18G x 6.5 cm	42.09.20009	8	23	0.038**60cm J	18G x 6.5 cm

CLICK TYPE-Coo

Product No.	Size(Fr.)	length(cm)	Guidewire	Introducer Needle	Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introducer Needle
42.09.30000	4	9	0.021**45cm J	20G x 3.8 cm	42.09.30004	4	19	0.021**60cm J	20G x 3.8 cm
42.09.30001	5	11	0.038**45cm J	18G x 6.5 cm	42.09.30005	5	23	0.038**60cm J	18G x 6.5 cm
42.09.30002	6	11	0.038**45cm J	18G x 6.5 cm	42.09.30006	6	23	0.038**60cm J	18G x 6.5 cm
42.09.30003	7	11	0.038**45cm J	18G x 6.5 cm	42.09.30007	7	23	0.038**60cm J	18G x 6.5 cm

CLICK TYPE-Mer

Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introducer Needle	Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introducer Needle
42.09.40000	5	11	0.038**45cm J	18G x 6.5 cm	42.09.40002	7	11	0.038**45cm J	18G x 6.5 cm
42.09.40001	6	11	0.038**45cm J	18G x 6.5 cm					




TRANSRADIAL INTRODUCER SETS

Features

- Perform diagnostic and interventional procedures without upsizing to a larger sheath
- Optimal radial access, especially in women with smaller radial arteries
- Less penetration resistance than conventional sheaths

Contents

- Transradial Introducer Sheath
- Dilator
- Kink-Resistant Guide Wire
- Sringes
- I.V.Cannula / Introducer Needle



TWIST TYPE -Med		Nitinol shaft with SS spring coil tip guidewire included		
Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	I.V.Cannula
42.10.10000	4	7	0.018**65cm Angled	20G x 3.2 cm
42.10.10002	5	7	0.018**65cm Angled	20G x 3.2 cm
42.10.10005	6	7	0.018**65cm Angled	20G x 3.2 cm
42.10.10008	7	7	0.018**65cm Angled	20G x 3.2 cm
42.10.10012	8	7	0.018**65cm Angled	20G x 3.2 cm
42.10.10001	4	9	0.018**65cm Angled	20G x 3.2 cm
42.10.10003	5	11	0.018**65cm Angled	20G x 3.2 cm
42.10.10006	6	11	0.018**65cm Angled	20G x 3.2 cm
42.10.10009	7	11	0.018**65cm Angled	20G x 3.2 cm
42.10.10004	5	16	0.018**65cm Angled	20G x 3.2 cm
42.10.10007	6	16	0.018**65cm Angled	20G x 3.2 cm
42.10.10010	7	16	0.018**65cm Angled	20G x 3.2 cm

CLICK TYPE-Ter		Nitinol core with plastic jacket guidewire included		
Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	I.V.Cannula
42.10.20000	4	7	0.025**45cm straight	20G x 3.2 cm
42.10.20003	5	7	0.025**45cm straight	20G x 3.2 cm
42.10.20006	6	7	0.025**45cm straight	20G x 3.2 cm
42.10.20009	7	7	0.025**45cm straight	20G x 3.2 cm
42.10.20001	4	11	0.025**45cm straight	20G x 3.2 cm
42.10.20004	5	11	0.025**45cm straight	20G x 3.2 cm
42.10.20007	6	11	0.025**45cm straight	20G x 3.2 cm
42.10.20010	7	11	0.025**45cm straight	20G x 3.2 cm
42.10.20002	4	16	0.025**45cm straight	20G x 3.2 cm
42.10.20005	5	16	0.025**45cm straight	20G x 3.2 cm
42.10.20008	6	16	0.025**45cm straight	20G x 3.2 cm
42.10.20011	7	16	0.025**45cm straight	20G x 3.2 cm

CLICK TYPE-Coo		Nitinol core with SS spring coil guidewire included		
Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introducer Needle
42.10.30000	4	7	0.021**45cm Straight	20G x 3.8 cm
42.10.30003	5	7	0.021**45cm Straight	20G x 3.8 cm
42.10.30006	6	7	0.021**45cm Straight	20G x 3.8 cm
42.10.30009	7	7	0.021**45cm Straight	20G x 3.8 cm
42.10.30001	4	11	0.021**45cm Straight	20G x 3.8 cm
42.10.30004	5	11	0.021**45cm Straight	20G x 3.8 cm
42.10.30007	6	11	0.021**45cm Straight	20G x 3.8 cm
42.10.30010	7	11	0.021**45cm Straight	20G x 3.8 cm
42.10.30002	4	16	0.021**45cm Straight	20G x 3.8 cm
42.10.30005	5	16	0.021**45cm Straight	20G x 3.8 cm
42.10.30008	6	16	0.021**45cm Straight	20G x 3.8 cm
42.10.30011	7	16	0.021**45cm Straight	20G x 3.8 cm

CLICK TYPE-Mer		Nitinol shaft with SS spring coil tip guidewire included		
Product No.	Size(Fr.)	length(cm)	Nitinol Guidewire	Introduer Needle
42.10.40000	5	7	0.021**45cm Straight	20G x 3.8 cm
42.10.40002	6	7	0.021**45cm Straight	20G x 3.8 cm
42.10.40004	7	7	0.021**45cm Straight	20G x 3.8 cm
42.10.40001	5	11	0.021**45cm Straight	20G x 3.8 cm
42.10.40003	6	11	0.021**45cm Straight	20G x 3.8 cm
42.10.40005	7	11	0.021**45cm Straight	20G x 3.8 cm

PRESSURE BANDAGE

Features

- Easy to fix without displacement
- Ensuring normal venous blood circulation;
- Easy for observation and adjust the pressure

Product No.	Size (cm)
42.19.30002	22



TOURNIQUET

Features

- Patent design for oppressing the puncture point for vitro bleeding stanching after radial artery puncture
- Stop bleeding by simply adjusting the band or turncap
- Soft and transparent pad to make patients comfort.

Product No.	Size (mm)
42.19.30000	70



PEELABLE INTRODUCER SETS

Features

- Lower insertion forces during placement into vasculature;
- Reduced drug on catheter during placement during the sheath;
- Convenient diator to sheath interlock
- * We can supply kink resistance nitinol guide wire to increase clinician confidence

Contents

- Peelable introducer Shealth+ dilator
- Syringe
- Guide Wire
- introducer needle
- Scapel



Shealth Length: 14CM									
Product No.	Size(Fr.)	Tube OD(mm)	Min.ID(mm)	Min.Tip ID(mm)	Product No.	Size(Fr.)	Tube OD(mm)	Min.ID(mm)	Min.Tip ID(mm)
42.11.10000	5.0	2.29	1.73	1.68	42.11.10003	8.0	3.33	2.72	2.67
42.11.10001	6.0	2.62	2.06	2.01	42.11.10004	9.0	3.66	3.05	3.00
42.11.10002	7.0	3.00	2.39	2.34	42.11.10005	10.0	4.04	3.38	3.33

MANIFOLDS-ONE PORT

Features

- Smooth rotation
- Latex free

Product No.	Description	Pressure
42.06.10000	"ON" w/Rotating Adapter, 3 Way	500 PSI
42.06.10001	"OFF" w/Rotating Adapter, 3 Way	500 PSI
42.06.20000	"ON" w/Rotating Adapter, 3 Way	250 PSI
42.06.20001	"OFF" w/Rotating Adapter, 3 Way	250 PSI



MANIFOLDS -TWO PORTS

Features

- Smooth-turning handles
- Latex free

Block body

Product No.	Description	Pressure
42.05.10000	"ON" Right-Handed w/Rotating Adapter, 2 Port	500 PSI
42.05.10001	"OFF" Right-Handed w/Rotating Adapter, 2 Port	500 PSI
42.05.10002	"ON" Right-Handed w/Rotating Adapter, 2 Port	250 PSI
42.05.10003	"OFF" Right-Handed w/Rotating Adapter, 2 Port	250 PSI

Half body

Product No.	Description	Pressure
42.05.20000	"ON" Right-Handed w/Rotating Adapter, 2 Port	500 PSI
42.05.20001	"OFF" Right-Handed w/Rotating Adapter, 2 Port	500 PSI
42.05.20002	"ON" Right-Handed w/Rotating Adapter, 2 Port	250 PSI
42.05.20003	"OFF" Right-Handed w/Rotating Adapter, 2 Port	250 PSI



MANIFOLDS-THREE PORTS

Features

- Large internal lumen (2.3mm diameter)
- Easy to rotation
- Latex free

Product No.	Description	Pressure
42.05.40000	"ON" Right-Handed w/Rotating Adapter, 3 Port	500 PSI
42.05.40001	"OFF" Right-Handed w/Rotating Adapter, 3 Port	500 PSI
42.05.40002	"ON" Right-Handed w/Rotating Adapter, 3 Port	250 PSI
42.05.40003	"OFF" Right-Handed w/Rotating Adapter, 3 Port	250 PSI



MANIFOLD KITS

Features

- SCW custom manifold kits are designed to enhance an angiographic lab's efficiency by meeting the specifications with one complete sterile package.

Product No.	Description
42.05.50000	Manifold "RIGHT ON",Dose-control syringes 12ml
42.05.50001	Manifold "RIGHT OFF",Dose-control syringes 12ml



DOSE-CONTROL SYRINGES



Features

- Clear body provides excellent clarification and smooth as glass feeling
- Solid piston barrel Maintains stable and persistent under pressure
- Rotating and Fixed Luers , in luer connection it allows for flexibility and dependence
- Safety of space ,Intended to reduce the potential of air bubbles getting into the catheter
- Safety of reservoir,available with 0.5 mL taking precautions against bottoming out during injection

Product No.	Description	Tip Style	Product No.	Description	Tip Style
42.07.10000	6cc Thumb Ring&Finger Rings	Rotator Tip	42.07.20000	6cc Thumb Ring&Finger Rings	Fixed Tip
42.07.10001	10cc Thumb Ring&Finger Rings	Rotator Tip	42.07.20001	10cc Thumb Ring&Finger Rings	Fixed Tip
42.07.10002	12cc Thumb Ring&Finger Rings	Rotator Tip	42.07.20002	12cc Thumb Ring&Finger Rings	Fixed Tip
42.07.10003	20cc Thumb Ring&Finger Rings	Rotator Tip	42.07.20003	20cc Thumb Ring&Finger Rings	Fixed Tip



COLORED PISTON SPECIALTY SYRINGES

Features

- Clear body provides excellent clarification
- Smooth operation
- Safety increased that reduces incidence rate of syringe exchange

Product No.	Description						
42.15.10000	3cc White	42.15.20000	6cc White	42.15.30000	10cc White	42.15.40000	20cc White
42.15.10001	3cc Red	42.15.20001	6cc Red	42.15.30001	10cc Red	42.15.40001	20cc Red
42.15.10002	3cc Green	42.15.20002	6cc Green	42.15.30002	10cc Green	42.15.40002	20cc Green
42.15.10003	3cc Blue	42.15.20003	6cc Blue	42.15.30003	10cc Blue	42.15.40003	20cc Blue
42.15.10004	3cc Yellow	42.15.20004	6cc Yellow	42.15.30004	10cc Yellow	42.15.40004	20cc Yellow
						42.15.40005	20cc Purple

CONNECTING TUBINGS (1200PSI)

Features

- Protects against microbiological infect
- ganoid; smooth-faced
- succinct design
- High pressure resistant
- Easy operation

Product No.	Description
42.02.20000	25 cm Female Luer Lock to Male Rotator
42.02.20001	50 cm Female Luer Lock to Male Rotator
42.02.20002	75 cm Female Luer Lock to Male Rotator
42.02.20003	120 cm Female Luer Lock to Male Rotator
42.02.20004	150 cm Female Luer Lock to Male Rotator
42.02.20005	180 cm Female Luer Lock to Male Rotator

CONNECTING TUBING (500PSI)

Features

- Clear PVC Tubing (DEHP Free)
- High durometer for accurate measurements
- bore high pressure extension line suitable for high pressure monitoring

Product No.	Description	Product No.	Description
42.02.10006	25 cm Female to Male Luer Lock	42.02.10009	120 cm Female to Male Luer Lock
42.02.10000	25 cm Female Luer Lock to Male Rotator	42.02.10003	120 cm Female Luer Lock to Male Rotator
42.02.10007	50 cm Female to Male Luer Lock	42.02.10010	150 cm Female to Male Luer Lock
42.02.10001	50 cm Female Luer Lock to Male Rotator	42.02.10004	150 cm Female Luer Lock to Male Rotator
42.02.10008	75 cm Female to Male Luer Lock	42.02.10011	180 cm Female to Male Luer Lock
42.02.10002	75 cm Female Luer Lock to Male Rotator	42.02.10005	180 cm Female Luer Lock to Male Rotator

INTRODUCER NEEDLES



Product No.	Description	Product No.	Description	Product No.	Description	Product No.	Description
42.19.10009	Green Hub 18Ga x 6.5 cm	42.19.10002	Clear Hub 18Ga x 6.5 cm	42.19.10008	Green Hub 20 Ga x 3.8 cm	42.19.10006	Y type Pink Hub 18 Ga x 6.5 cm
42.19.10010	Green Hub 18Ga x 7.0 cm	42.19.10003	Clear Hub 18Ga x 7.0 cm	42.19.10005	Clear Hub 20 Ga x 3.8 cm	42.19.10007	Y type Pink Hub 18 Ga x 7.0 cm



Enterprise introduction

Headquartered in Shenzhen, a southern city next to Hong Kong, SCW MEDICATH LTD is a leading manufacturer of disposable medical device in China. The company has 500 employees with over 500,000 square feet of the standardized manufacturing and modernized office space. Since 1996, SCW has been specialized in the field of anesthesiology, critical care and angiographic accessory products. Our guiding principle is to provide cost-effective customer solutions with SCW brand name products that match the quality of market leaders by innovative design and cost-effective manufacturing.

With skilled development team and cost-effective manufacturing process, SCW offers its products to OEM markets and welcomes joined efforts with medical device providers to design and manufacture new devices.



◆ Corporate environment



◆ Lecture



◆ Product seminar



◆ Product line



◆ Quality control



◆ Product sterilization



◆ Warehouse