


Ansicht "A"
view "A"

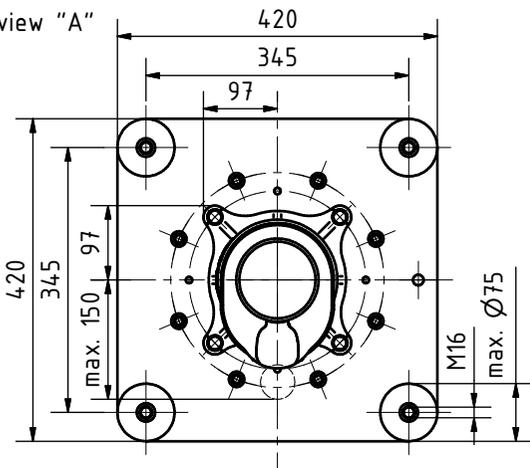

U _{max}	ØO	Kriechweg leakage path	max. Leiterquerschnitt max. cross section	max. Schämaß max. stripped core	Schlagweite S arcing distance S	L	Gewicht weight	F
72.5 kV	313 mm	≥ 150 cm	2500 mm ²	99 mm	≥ 665 mm	1028 mm	75 kg	11.9 kN
72.5 kV	313 mm	≥ 216 cm	2500 mm ²	99 mm	≥ 900 mm	1298 mm	80 kg	7.5 kN
72.5 kV	313 mm	≥ 227 cm	2500 mm ²	99 mm	≥ 953 mm	1343 mm	90 kg	8.4 kN
123 kV	313 mm	≥ 316 cm	2000 mm ²	99 mm	≥ 1315 mm	1703 mm	90 kg	6.5 kN
123 kV	314 mm	≥ 316 cm	2500 mm ²	107 mm	≥ 1315 mm	1667 mm	90 kg	4.2 kN
145 kV	313 mm	≥ 383 cm	1800 mm ²	99 mm	≥ 1610 mm	1973 mm	95 kg	5.4 kN
170 kV	313 mm	≥ 461 cm	1400 mm ²	99 mm	≥ 1925 mm	2288 mm	105 kg	4.6 kN
170 kV	313 mm	≥ 539 cm	1400 mm ²	99 mm	≥ 1545 mm	1915 mm	95 kg	5.6 kN
170 kV	313 mm	≥ 662 cm	1400 mm ²	99 mm	≥ 1885 mm	2251 mm	105 kg	4.7 kN
170 kV	313 mm	≥ 804 cm	1400 mm ²	99 mm	≥ 2242 mm	2635 mm	110 kg	3.9 kN
170 kV	314 mm	≥ 539 cm	2500 mm ²	107 mm	≥ 1522 mm	1875 mm	145 kg	4.2 kN
170 kV	314 mm	≥ 804 cm	2500 mm ²	107 mm	≥ 2242 mm	2594 mm	160 kg	3.3 kN

F = 1,5 MML = max. Umbruchkraft / max. cantilever load

max. Abweichung von senkrechter Aufstellung 30°
max. deviation from vertical position 30°

Schirmerdung ist zu projektieren *
screen earthing to be engineered *

* Material nicht im Standardlieferumfang
* material not in standard scope of supply

scale		date	name	The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. Technical modifications reserved. © Südkabel GmbH	reference document no.
%	prepared	16.03.2021	Stroot		replaced by
resp.dept.	checked	17.03.2021	Schnoor		document no.
ECCG	approved	17.03.2021	Stroot	rev.	
SÜDKABEL 68147 Mannheim Germany		Freiluftendverschluss EHFVC 72.5/123/145/170 Outdoor Sealing End EHFVC 72.5/123/145/170			0.36.74.0A
design	model	composite	document type: OF	format A3	