

## ELECTRODES & ACCESSORIES

Maximum result both in terms of stability and precision, also under the most difficult conditions. The line of electrodes is extremely complete and makes it possible to meet any monitoring requirement.

- For adults or for paediatric use
- With solid gel or liquid gel
- For normal monitoring or for stress tests
- FOAM or TNT/CLOTH or MICROPORE backing
- Round- shaped with different diameters, oval, rectangular or square. This line of accessories offers complementary or similar articles that are in great demand. Also in the case of accessories, the continuous research and exchange of information with the final user have allowed us to manufacture high quality and extremely reliable products.

# TOP TRACE LINE

## MONITORING & RESTING ECG'S



### NM 50 RFI

Ø 50 mm.	Dimensions	Ø 55 mm.
Foam	Backing	Foam
Solid	Gel	Liquid
Ag/AgCl	Sensor	Ag/AgCl



### NM 55 RLI

40 pcs / pouch - 800 pcs / box - 9600 pcs / carton      **Packaging**      25 pcs / pouch - 500 pcs / box - 6000 pcs / carton

The most typical sizes. The most demanded supports. A proved quality always useful.



### NM 42 DFI

45x42 mm.	Dimensions	42x36 mm.
Foam	Backing	Foam
Solid	Gel	Solid
Ag/AgCl	Sensor	Ag/AgCl



### NM 3642 OFI

50 pcs / pouch - 1200 pcs / box - 14400 pcs / carton      **Packaging**      50 pcs / pouch - 1200 pcs / box - 14400 pcs / carton

Two multifunctional models: suitable for adult and pediatric ECG's.



### NP 30 RFI

Ø 30 mm.	Dimensions	28x44 mm.
Foam	Backing	Foam
Solid	Gel	Solid
Ag/AgCl	Sensor	Ag/AgCl



### NM 2844 RFS

30 pcs / pouch - 900 pcs / box - 10800 pcs / carton  
The classical and largely used electrode for pediatric ECG's.  
Excellent quality ensured also on "critical" patients.

**Packaging**      50 pcs / pouch - 1250 pcs / box - 15000 pcs / master carton



### NM 3351 OFI

51x33 mm.	Dimensions	28x44 mm.
Foam	Backing	Foam
Solid	Gel	Solid
Ag/AgCl	Sensor	Ag/AgCl - Banana plug



### NM 2844 FBI

30 pcs / pouch - 900 pcs / box - 10800 pcs / carton      **Packaging**      30 pcs / pouch - 600 pcs / box - 7200 pcs / carton

# TOP TRACE LINE

## STRESS TEST



### ST 50 RFI

Ø 50 mm.	Dimensions	Ø 50 mm.
Foam	Backing	Foam
Solid	Gel	Liquid
Ag/AgCl	Sensor	Ag/AgCl



### ST 50 RLI

40pcs/pouch-800pcs/box- 9600pcs/carton

Packaging

30 pcs / pouch - 600 pcs / box - 7200 pcs / carton

4 p.d. Neferomagnetiniai elektrodai

most suitable electrodes for ECG's under difficult conditions. Strong adhesiveness • Do not irritate the skin • Highly conductive gel

## MRI NON - MAGNETIC

## ROUTINE ECG MONITORING



### RT 50 RFI

Ø 50 mm.	Dimensions	Apvalūs, 5 cm diametro
Foam	Backing	Pagrindas, poliuretano putos
Solid	Gel	4 p.d. Su geliu
Ag/AgCl	Sensor	Ag/AgCl

Daviklis anglinis, pagengtas Ag/AgCl

### MEDTAB



30pcs/pouch-600pcs/box- 7200pcs/carton

Packaging

100 pcs / pouch - 500 pcs / box - 5000 pcs / carton

This electrode entirely replaces suction chests and clamps to patient's advantage both in terms of hygiene and health. To be attached to alligator clip connectors.

## MONITORING / PRE-WIRED ELECTRODES



### RE 30 LWF

30 mm. female 4 mm	Dimensions	22 mm. safety 1,55 mm
Foam	Backing	Foam
Solid	Gel	Solid
Ag/AgCl	Sensor	Ag/AgCl


3 pcs / pouch - 300 pcs / box

Packaging

3 pcs / pouch - 300 pcs / box

Available also with 22 mm diameter Model RE 22 LWF (with 4 mm female socket)

Available also with 30 mm diameter Model RE 30 LWS (with 1,55 mm safety plug)

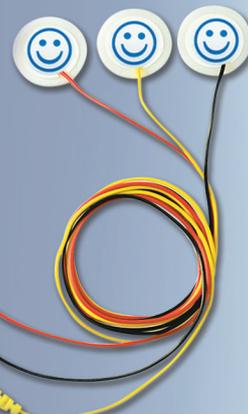

### RE 22 LWS



### RT 30 LWF

30 mm. female 4 mm	Dimensions	22 mm. safety 1,55 mm
Foam	Backing	Foam
Solid	Gel	Solid
Carbon	Sensor	Carbon

3 pcs / pouch - 300 pcs / box

Packaging

3 pcs / pouch - 300 pcs / box

Available also with 22 mm diameter Model RT 22 LWF (with 4 mm female socket)

Available also with 30 mm diameter Model RT 30 LWS (with 1,55 mm safety plug)



### RT 22 LWS

# MEDI SENSOR LINE

## MONITORING & RESTING ECG'S



**MODEL F 50-S**

Ø 50 mm.	Dimensions	Ø 26 mm.
Foam	Backing	Foam
Solid	Gel	Solid
Ag/AgCl	Sensor	Ag/AgCl


30 pcs / pouch – 1200 pcs / carton  
Available also with liquid gel Model F 50-L



**F 26-S**

50 pcs / pouch – 2000 pcs / carton

## HOLTER / LONG MONITORING



**MODEL W 601-S**

Ø 55 mm.	Dimensions	Ø 55 mm..
TNT	Backing	MICROPORE
Solid	Gel	Solid
Ag/AgCl	Sensor	Ag/AgCl

30 pcs / pouch – 1500 pcs / carton  
Available also with Ø 50 mm Model W 601  
and also with liquid gel Model W 601-L



**MODEL T 601-S**

30 pcs / pouch – 1500 pcs / carton

## STRESS TEST



**MODEL FS 50-L**

Ø 50 mm.	Dimensions	Ø 55 mm.
Foam	Backing	Foam
Liquid	Gel	Liquid
Ag/AgCl	Sensor	Ag/AgCl

30 pcs / pouch – 1200 pcs / carton



**MODEL F 55-L**

30 pcs / pouch – 1200 pcs / carton

## MULTIFUNCTION

**MODEL F 50-S BLUE**



**MODEL FS 50-L**

Ø 35x45 mm	Dimensions	Ø 50 mm
Foam	Backing	Foam
Solid	Gel	Solid
Ag/AgCl	Sensor	Carbon


50 pcs / pouch – 2000 pcs / carton



Ideal for all ECG monitoring, radiolucent application included!  
AVAILABLE ALSO FOR PEDIATRIC, Ø 26 mm, MODEL F 26-S BLUE

# TOP TRACE RT 50 RFI

## RADIOTRANSSPARENT ECG ELECTRODES



Support	FOAM	Gel	SOLID gel
Diameter	50 mm.	Sensor material	Carbon <span style="border: 1px solid red; padding: 2px;">daviklis – anglinis</span>
Reorder cod.	14654	Manufacturer	CERACARTA SpA

TECHNICAL DATA			
Product profile		Electric features	
		actual results	AAMI standards
<p>Disposable ECG electrode, white FOAM type diam. 50mm. Circular shaped, centered Radio translucent snap with conductive solid gel column. Aggressive medical grade adhesive. It eliminates the mess of liquid gels, while still offering low impedance. It holds the aqueous content in a polymerized hydrogel formulation, being non-irritating, non-sensitizing and non-cytotoxic to the skin.</p>		DC offset Voltage	0.15      ≤ 100 mV
<b>Features</b>	It is manufactured out of an aggressive, non-sensitizing, acrylic copolymer coated foam. All electrodes are Latex-free.	AC Impedance 10 Hz	120      ≤ 2000 ohm
<b>Benefits</b>	This hypoallergic, non-irritating, disposable electrode meets and exceeds all AAMI performance specs.	DC Offset 5 sec after capacitor discharge	1.9      ≤ 100 mV
<b>Applications</b>	Special Radio translucent snap suitable for X-ray imaging and MRI tests. Specially designed for the difficult adhesions conditions that occur in Holter patient monitoring or Stress test, ICU/CCU, Operating Room, Recovery Room, Cardiac Rehab, Dental surgery etc.	Recovery Slope 30 second interval	0.1      ± 1mV/sec.
<b>Performance Charact.</b>	The electrode incorporates a propriety solid gel formulation and is tested according to the voluntary Association of the Advancement of Medical Instrumentation (AAMI), USA	AC Impedance after defib.	77      ≤ 3000 ohm
<b>Packaging</b>	30 pcs / Aluminium envelopes 600 pcs/ Box 7.200 pcs / Master carton	<b>Expiry date:</b> 36 months in closed packings	
		<b>Compliance to standards:</b> Directive 93/42/Eec (D.L.46/97).; ANSI/AAMI EC 12 :2000/(R)2005 Class I device Product branded CE	

# ECG


# Electrodes

CEROCORTO®

- Elettrodi monouso per ECG
- Disposable ECG Electrodes
- ECG electrodos de un solo uso
- Electrodes ECG à usage unique
- EKG Einmal Elektroden
- Eletrodos descartáveis para ECG
- أقطاب كهربائية تستخدم لمرة واحدة لتخطيط كهربائية القلب

Ženkliukai: be latekso,  
be PVC, vienkartiniai

электроды для ЭКГ

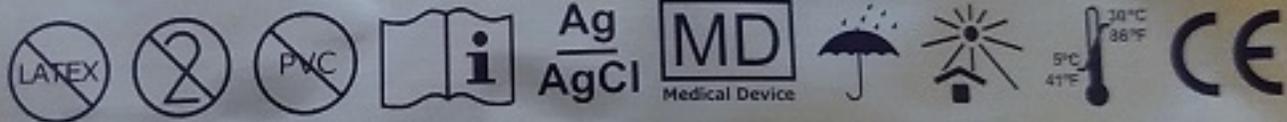

Pcs. 30	LOT C34654	MR
Size: Ø 50 mm	2021-08-17	
	2024-08-16	
REF RT 50 RFI		
Gel & Backing: Solid/Foam		

Tinkamas MRT aplinkoje, ženkliukas

Sensor Ag/AgCl

260421V0

# TOP TRACE