


Documentation of installation and exploitation/running of the product 6030


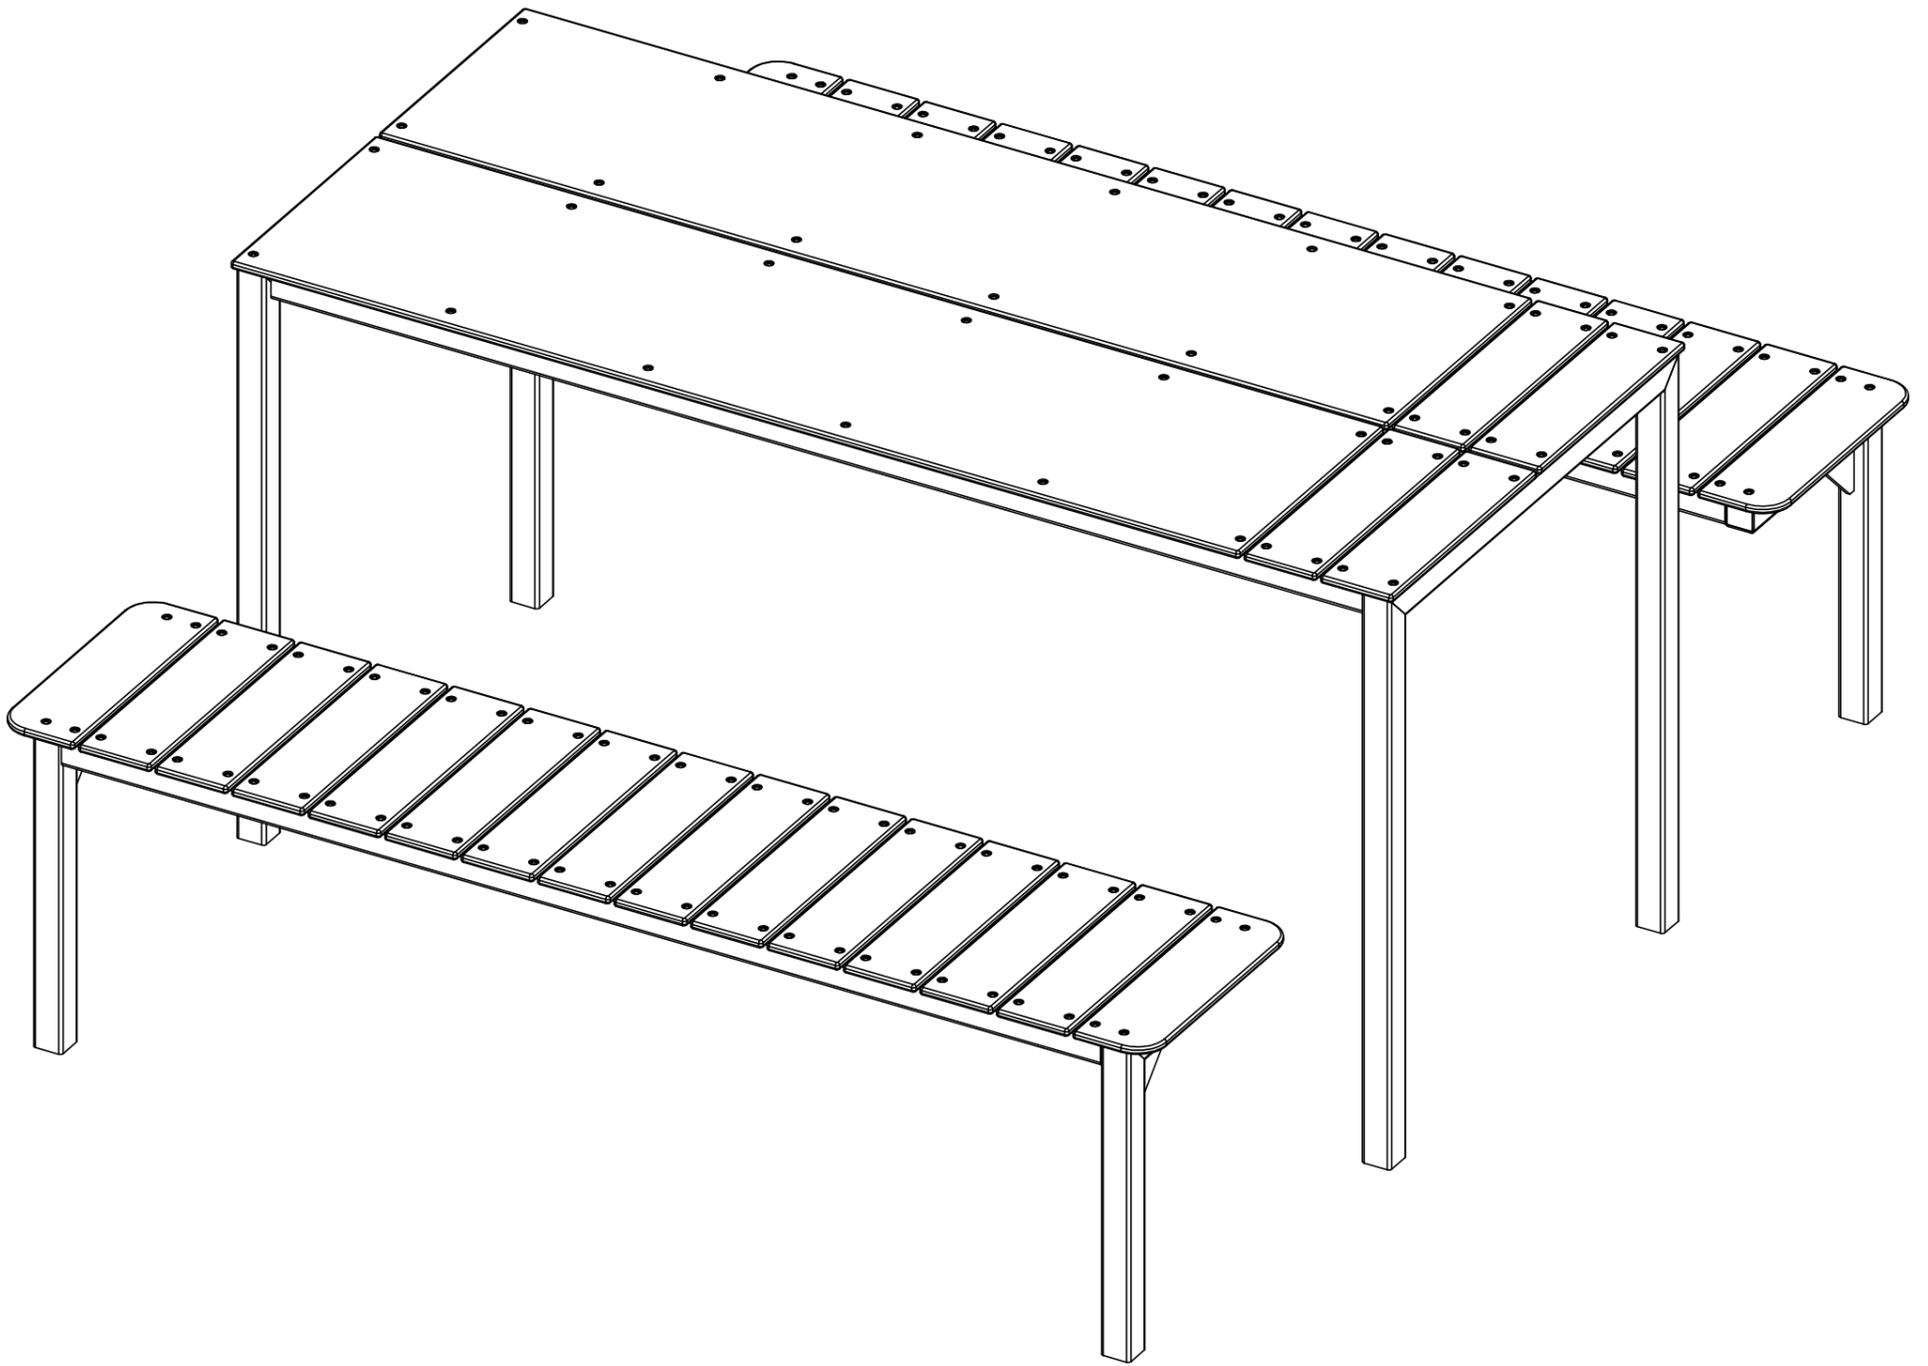


All substitutionary parts for BUGLO's products are available at producer's during whole use period (working life) of the product.

Necessary toolset for the assembly of the product:

- Box wrenches nr 17
- Tools used to making holes in the ground/surface
- Level

Definition of anchoring depth

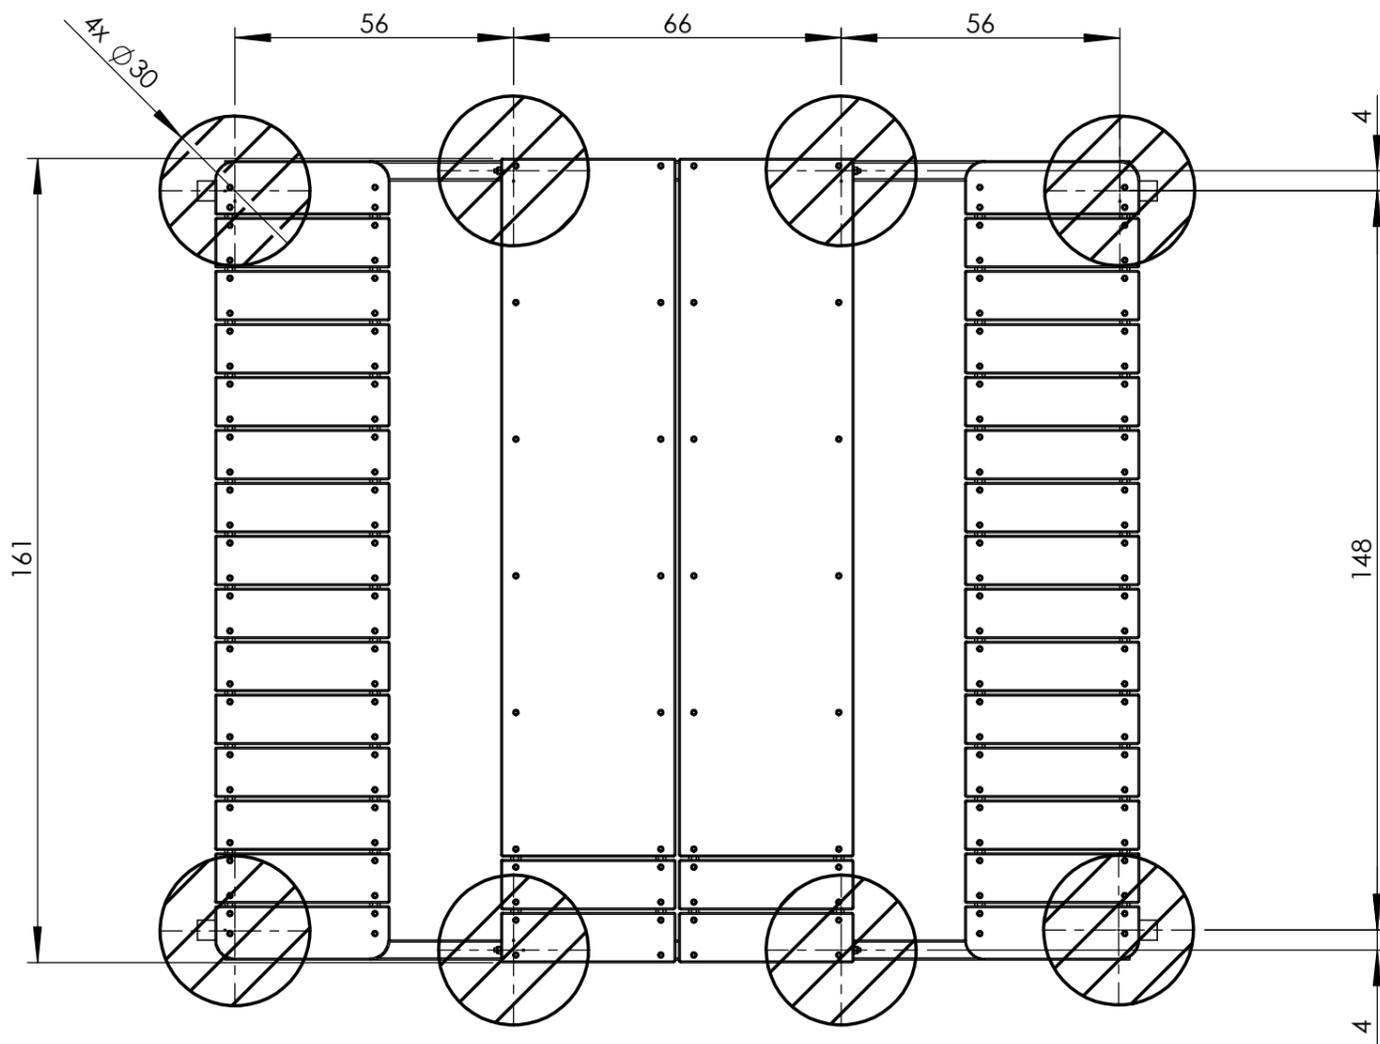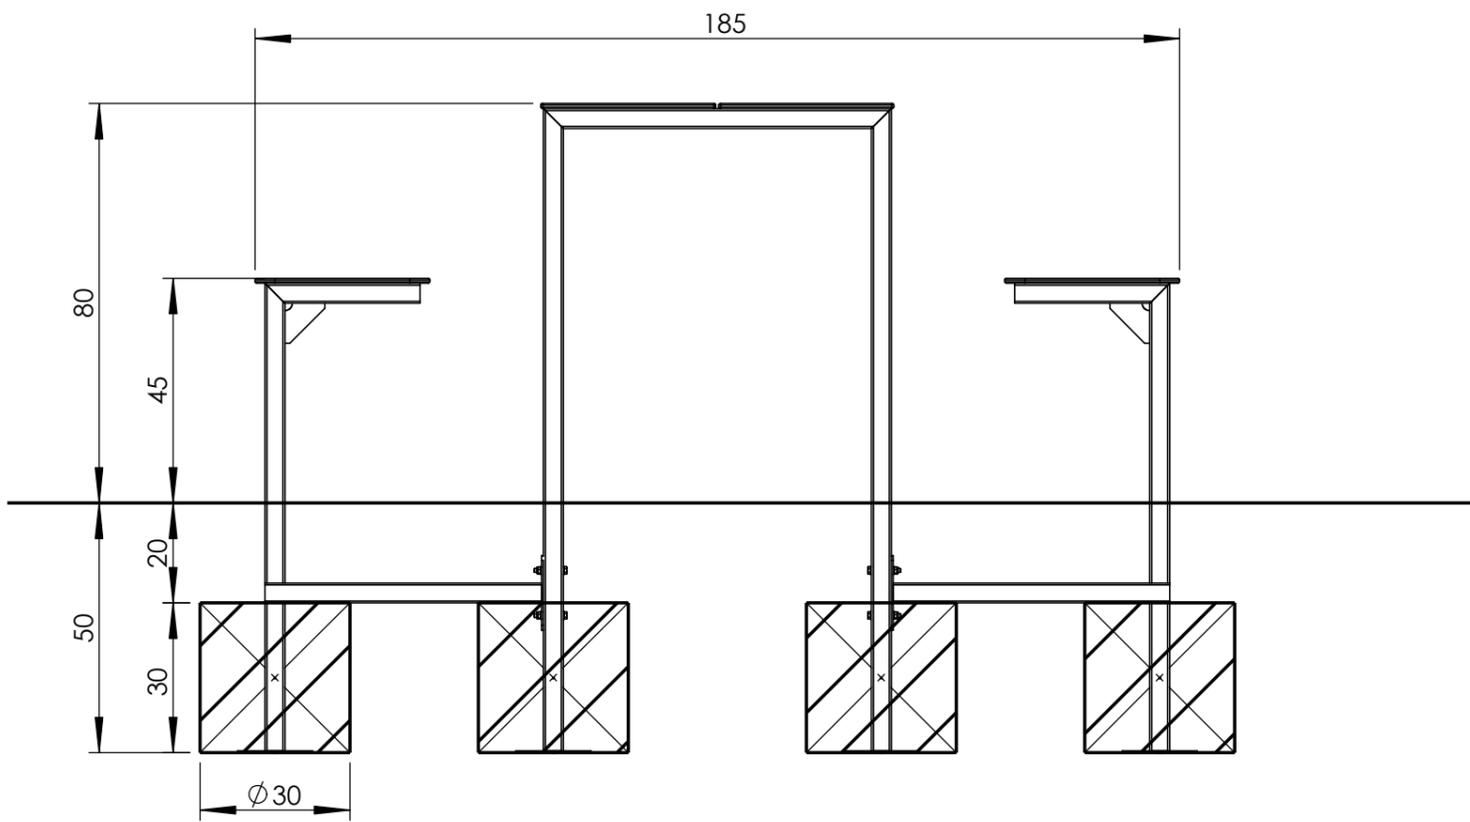

Caution:

During assembly pay special attention to:

- 1) Vertical setting of the foundation.
- 2) Tightening all screws and mountings.
- 3) Securing and marking assembly place.

Before handling the device to use you must check the stability of all elements/parts, remove securing tapes and check the level and the condition of fall amortization surface.

Product installation, conservation and replacement of elements pose a threat for playing children, which is why it is required to mark and secure the assembly space. Such security must guarantee no access to the work space both during and after work. Main threats can be caused by electrical devices and tools, deep foundation holes and incomplete product sets.

During the installation it's required to ensure the assembly space to be about the same size as the safety zone of the equipment.

Conservation and control of the device

According to the EN 1176-1 : 2009-Norm

The conservation:

It's required to consult the device producer about all maintaining works of the devices parts which are under guarantee.

Damaged paint coats should be first cleaned out of dust, fat and the corrosion centres.

After that, the cleaned surface should be double covered with an acrylic-polyester steel paint.

The colour combination used by BUGLO:

- 1) Grey - RAL 7035
- 2) Yellow - RAL 1021
- 3) Blue - RAL 5015
- 4) Red - RAL 3000
- 5) Green - RAL 6018
- 6) Black - RAL 9005
- 7) Violet - RAL 4008

All paint stains/marks created on metal elements and polyethylene plates by spray paints and oil felt-tip pens can be removed through wiping with a fabric soaked in NITRO solvent.

Recommendations for the equipment control according to the EN 1176-7:2009-Norm. Playground equipment and the surfaces part 7: Guidelines for the assembly, control, conservation and exploitation/running.

1) The periodic inspection - if the device is used very intensely or it's exposed to the vandalism, the control should be carry out once a week or more often.

The perdioidic control includes:

- checking the construction stability
- completing of all equipment parts
- checking if there are no cracks, sharp edges or other damages
- the cleanliness around the equipment (broken glass determines a big danger)
- smoothing the safe surface

2) The internal control - it should be carry out once every three months.

It includes the range of the periodic inspection. In addition, the device functions must be checked.

The internal control includes:

- the examination (the closers and masking covers must be completed)
- checking if the pipes/piles are stable
- checking the safe powdery surface and evening it out. (if the level is over 10cm below the right ground surface level, it must be replenished)

3) The internal control and the main control - they must be carry out once a year (compulsory)

- checking the construction stability
- checking and reconstructing anti-corrosion coating that was damaged
- checking the foundation state
- checking the safe powdery surface and evening it out (if the level is over 10cm below the right ground surface level, it must be replenished).