


FIXING OF RADIK STEEL PANEL RADIATORS




DRILL-IN BRACKETS

Drill-in bracket 18/120




- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 35 ÷ 65 mm** from the wall, at a distance of **D = 65 ÷ 80 mm** a bracket must also be used on the lower pair of fixing hangers (instead of a support)
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **1000 N** at **D = 50 mm**

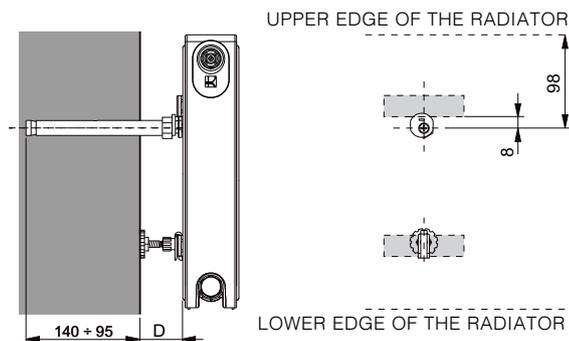


Set contains: 2 x bracket, 2 x support

Type	H [mm]	Order number
Drill-in bracket 18/120	300 ÷ 900	Z-U144

Drill-in bracket 18/110/100



- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 70 ÷ 100 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **500 N** at **D = 100 mm**

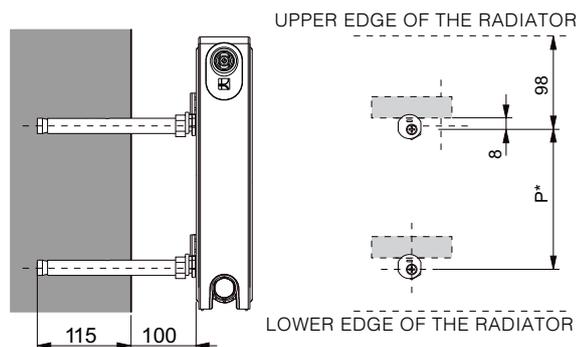

Set contains: 2 x bracket

* see page 20

Type	H [mm]	Order number
Drill-in bracket 18/110/100	300 ÷ 900	Z-U290