

Overview

HP EliteBook x360 830 G8 Notebook PC



Left

- | | |
|--------------------------------|--|
| 1. Internal Microphones (2) | 7. Glass Clickpad |
| 2. Web cam LED | 8. Smartcard Reader (Optional) |
| 3. HD and IR Camera (Optional) | 9. Audio Combo Jack |
| 4. Camera Shutter | 10. Super Speed USB Type-A 5Gbps signaling rate (1 charging) |
| 5. IR Camera LEDs (Optional) | 11. Super Speed USB Type-A 5Gbps signaling rate (1 charging) |
| 6. Ambient Light Sensor | 12. Nano Security Lock Slot (Lock sold separately) |

Overview



Right

1. Power Button Key
2. Power Connector
3. HDMI 2.0b Port (Cable not included)
4. Thunderbolt™ 4 with USB4™ Type-C® 40Gbps signaling rate ¹
5. Thunderbolt™ 4 with USB4™ Type-C® 40Gbps signaling rate ¹
6. SIM Card Slot (Optional)
7. Touch fingerprint Sensor (Select models)

1. SuperSpeed USB 20Gbps is not available with Thunderbolt™ 4.

Overview

At a Glance

- Windows 11 Pro, other Windows OS preinstalled
- Premium ultraslim design with precision-crafted machined CNC aluminum x360 design with four usage modes that is 0.71 inches (1.79 cm) thin with a starting weight of 2.98 lbs. (1.35 Kg)
- 11th Generation Intel® Core™ i5, i7 Processors
- Find your missing laptop even when it's turned off using the optional Tile™ feature and app
- Optional ultrabright, anti-glare touch displays with ambient light sensor
- Choice of displays:
 - 33.8 cm (13.3") diagonal FHD IPS LED-backlit BrightView touch with Corning® Gorilla® Glass 5, 250 nits, 45% NTSC
 - 33.8 cm (13.3") diagonal FHD IPS LED-backlit BrightView touch with Corning® Gorilla® Glass 5, 400 nits, 72% NTSC with Low Power
 - 33.8 cm (13.3") diagonal FHD IPS LED-backlit Anti-Glare glass touch with Corning® Gorilla® Glass 5, 400 nits, 72% NTSC with Low Power
 - 33.8 cm (13.3") diagonal FHD IPS LED-backlit BrightView touch with Corning® Gorilla® Glass 5, 1000 nits, 72% NTSC with HP Sure View Reflect Integrated Privacy Screen
 - 33.8 cm (13.3") diagonal FHD IPS LED-backlit Anti-Glare glass touch with Corning® Gorilla® Glass 5, 1000 nits, 72% NTSC with HP Sure View Reflect Integrated Privacy Screen
- Enterprise grade security with HP Sure Sense, HP Sure Start Gen7, HP Privacy Camera, HP Sure View Reflect , HP Sure Run Gen4, HP Sure Recover Gen4 with Embedded Reimaging , HP Sure Click, SmartCard Reader and Touch Fingerprint reader
- An optional HP Rechargeable Active Pen 3¹ with Magnetic Attach and 4096 Levels of pressure
- Connectivity with optional CAT20 5G/ WWAN, and Thunderbolt™ Docking (Dock sold separately)
- Choice of solid state drives up to 2 TB and DDR4 memory up to 32 GB
- Supports fast charging (50% in 30 minutes) with no impact on battery recharge cycles³
- Featuring redesigned quiet HP Keyboard with the HP Programmable key and backlit options
- Innovative world-facing third mic improves inbound ambient noise cancellation while 360-degree mic pick-up allows everyone to clearly hear and be heard
- Long battery life up to 13 hours and 15 minutes
- Undergoes MIL-STD 810H tests²
- Instant on/instant off with Modern Connected Standby
- Intel® Iris® X? Graphics

1. HP Rechargeable Active Pen 3 sold separately.

2. MIL-STD 810H is not intended to demonstrate fitness of U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack.

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Technical Specifications

PRODUCT NAME

HP EliteBook x360 830 G8 Notebook PC

OPERATING SYSTEMS

Preinstalled

Windows 11 Pro - HP recommends Windows 11 Pro ¹
Windows 11 Pro Education ¹
Windows 11 Home ¹
Windows 11 Home Single Language ¹
Windows 11 Pro (Windows 11 Enterprise available with a Volume Licensing Agreement) ¹
Windows 10 Pro ^{1,2}
Windows 10 Pro Education ^{1,2}
Windows 10 Home ^{1,2}
Windows 10 Home Single Language ^{1,2}
Windows 10 Pro (Windows 10 Enterprise available with a Volume Licensing Agreement) ^{1,2}
FreeDOS

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

2. This PC comes with Windows 10 and a free Windows 11 upgrade. The Windows 11 upgrade will be delivered late 2021 into 2022. Timing varies by device. Certain features require specific hardware. See aka.ms/windows11-spec.

PROCESSORS

Intel® Core™ i7-1165G7 with Intel® UHD Graphics 620 (Up to 4.7 GHz with Intel® Turbo Boost Technology, 12 MB L3 cache, 4 cores) ^{3,4,5,6}

Intel® Core™ i7-1185G7 (Up to 4.8 GHz with Intel® Turbo Boost Technology, 12 MB L3 cache, 4 cores), supports Intel® vPro® Technology ^{3,4,5,6}

Intel® Core™ i5-1135G7 with Intel® UHD Graphics 620 (Up to 4.2 GHz with Intel® Turbo Boost Technology, 8 MB L3 cache, 4 cores) ^{3,4,5,6}

Intel® Core™ i5-1145G7 (Up to 4.4 GHz with Intel® Turbo Boost Technology, 8 MB L3 cache, 4 cores), supports Intel® vPro® Technology ^{3,4,5,6}

Processor Family

11th Generation Intel® Core™ i7 processor (i7-1165G7) ⁶

11th Generation Intel® Core™ i7 processor (i7-1185G7) ⁶

11th Generation Intel® Core™ i5 processor (i5-1135G7) ⁶

11th Generation Intel® Core™ i5 processor (i5-1145G7) ⁶

3. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and yc hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

4. Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

5. Intel® Turbo Boost performance varies dependina on hardware. software and overall system confiauration. See

Technical Specifications

www.intel.com/technology/turboboost for more information.

6. In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

CHIPSET

Chipset is integrated with processor

GRAPHICS

Integrated

Intel® Iris® X? Graphics⁷

Supports

Support HD decode, DX12, HDMI 2.0b, HDCP 2.3⁸

7. Intel® Iris® Xe Graphics capabilities require system to be configured with Intel® Core™ i5 or i7 processors and dual channel memory. Intel® Iris® Xe Graphics with Intel® Core™ i5 or 7 processors and single channel memory will only function as UHD graphics.

8. HDMI cable sold separately.

DISPLAY

Touch

33.8 cm (13.3") diagonal FHD IPS BrightView WLED-backlit bent touch screen 250 nits, 45% NTSC with HD camera (1920 x 1080)^{9,10,11}

33.8 cm (13.3") diagonal FHD IPS BrightView WLED-backlit bent touch screen, 250 nits, 45% NTSC with HD camera for WWAN (1920 x 1080)^{9,10,11}

33.8 cm (13.3") diagonal FHD IPS BrightView WLED-backlit bent touch screen, 400 nits, 100% NTSC with Low Power, Ambient Light Sensor and HD+IR camera (1920 x 1080)^{9,10,11}

33.8 cm (13.3") diagonal FHD IPS BrightView WLED-backlit bent touch screen, 400 nits, 100% NTSC with Low Power, Ambient Light Sensor and HD+IR camera for WWAN (1920 x 1080)^{9,10,11}

33.8 cm (13.3") diagonal FHD IPS Anti-Glare WLED-backlit bent touch screen 400 nits, 100% NTSC with Low Power, Ambient Light Sensor and HD+IR camera for WWAN (1920 x 1080)^{9,10,11}

HP Sure View Reflect Integrated Privacy Screen

33.8 cm (13.3") diagonal FHD IPS BrightView WLED-backlit bent touch screen, 1000 nits, 72% NTSC with Ambient Light Sensor and HD+IR camera (1920 x 1080)^{9,10,11,12}

HP Sure View Reflect Integrated Privacy Screen

33.8 cm (13.3") diagonal FHD IPS BrightView WLED-backlit bent touch screen, 1000 nits, 72% NTSC with Ambient Light Sensor and HD+IR camera for WWAN (1920 x 1080)^{9,10,11,12}

HP Sure View Reflect Integrated Privacy Screen

33.8 cm (13.3") diagonal FHD IPS Anti-Glare WLED-backlit bent touch screen, 1000 nits, 72% NTSC with Ambient Light Sensor and HD+IR camera (1920 x 1080)^{9,10,11,12}

HP Sure View Reflect Integrated Privacy Screen

33.8 cm (13.3") diagonal FHD IPS Anti-Glare WLED-backlit bent touch screen with Corning® Gorilla® Glass 5, 1000 nits, 72% NTSC with Ambient Light Sensor and HD+IR camera for WWAN (1920 x 1080)^{9,10,11,12}

Technical Specifications

HDMI 2.0¹³

Support resolution up to 4K @60 Hz

9. FHD/HD content required to view FHD/HD images.

10. Resolutions are dependent upon monitor capability, and resolution and color depth settings.

11. Actual brightness will be lower with touchscreen or Sure View.

12. HP Sure View integrated privacy screen is an optional feature that must be configured at purchase and is designed to function in landscape orientation.

13. HDMI cable sold separately.

Docking station model (Sold separately)	Total number of supported displays (incl. the notebook display)	Max resolutions supported for DP 1.4 hosts with DSC	Dock Connectors	Technical limitations / additional information For more details refer to HP Dock QuickSpecs http://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c04168358 All information below applies to platforms running DP 1.4 with DSC
HP Thunderbolt Dock G2	Max number of displays = 4	Dual 8K@ 60Hz in high res mode	2xDP, 1xVGA, 1xTB, 1xUSB-C alt-mode	Max displays = 4 with max resolution of 5K@ 30Hz running Thunderbolt host Max resolution possible is dual 8K displays @ 60Hz running Thunderbolt host or running a non-Thunderbolt host in High Resolution mode The highest resolution for dual displays running a non-Thunderbolt host in Multi-function mode is one 5K dual cable (using both DP ports) + one 4K on USB-C DP port
HP USB-C Dock G5	3	Dual 5K@ 30Hz + 1 4K UHD (multi-function mode)	1xHDMI, 2xDP	Three maximum displays supported are two 5K@ 30 Hz on DP ports plus one 4K UHD@ 30 Hz on HDMI in Multi-function mode Highest resolution with dual displays is two 8K@ 60Hz host in High Resolution mode The highest resolution for running a non-Thunderbolt host in Multi-function mode is a single 5K dual cable (using both DP ports) + one 4K on HDMI port
HP USB-C/A Universal Dock G2	3	Triple 4K UHD@ 60Hz	1xHDMI, 2xDP	In High Resolution, mode the max available is one display. This dock's best use case is triple display. The best resolution for dual display is two 4K UHD@ 60Hz Highest triple displays resolution available is three 4KUHD @60Hz using both DP and 1 HDMI port.

Technical Specifications

				Best single display is with High Resolution mode using HDMI port.
HP USB-C Travel Dock G2	1	Single 4K@ 30 Hz 4960 x 2160 (via HDMI) or 1920 x 1200@ 60Hz via VGA	1xHDMI, 1xVGA	Single external display using either HDMI or VGA

STORAGE AND DRIVES

Primary M.2 Storage

128 GB PCIe® Gen3x2 NVMe™ M.2 SSD TLC¹⁴

256 GB PCIe® Gen3x4 NVMe™ M.2 SSD TLC¹⁴

512 GB PCIe® Gen3x4 NVMe™ M.2 SSD TLC¹⁴

1 TB PCIe® Gen3x4 NVMe™ M.2 SSD TLC¹⁴

2 TB PCIe® Gen3x4 NVMe™ M.2 SSD TLC¹⁴

256 GB PCIe® NVMe™ Value M.2 SSD¹⁴

512 GB PCIe® NVMe™ Value M.2 SSD¹⁴

512 GB PCIe® Gen 3x4 NVMe™ M.2 SED TLC OPAL2¹⁴

256 GB PCIe® Gen3x4 NVMe™ M.2 SED TLC OPAL2¹⁴

512 Intel® PCIe® NVMe™ QLC M.2 SSD with 32 GB Intel® Optane™ memory H10^{14,15}

14. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10 and 11) is reserved for system recovery software

15. Intel® Optane™ H10 memory system acceleration does not replace or increase the DRAM in your system. Requires 8th Gen or high Intel® Core™ processor, BIOS version with Intel® Optane™ supported, Windows 10 64-bit, and an Intel® Rapid Storage Technology (Intel® RST) driver.

MEMORY

Technical Specifications

Maximum Memory

32GB DDR4-3200 ¹⁶

Memory

32 GB DDR4-3200 ¹⁶

16 GB DDR4-3200 ¹⁶

8 GB DDR4-3200 ¹⁶

Memory

Memory soldered down

DDR4, System runs at: 3200

Supports Dual Channel Memory

16. Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

NETWORKING/COMMUNICATIONS

WLAN

Intel® Dual Band Wireless-AX201 802.11a/b/g/n/ac (2x2) Wi-Fi 6 and Bluetooth® 5 Combo, vPro® ^{17,18}

Intel® Dual Band Wireless-AX201 802.11a/b/g/n/ac (2x2) Wi-Fi 6 and Bluetooth® 5 Combo, non-vPro® ¹⁷

WWAN

Intel® XMM™ 7360 LTE-Advanced Cat 9 ¹⁹

Qualcomm® Snapdragon™ X55 5G Module Cat 20²⁰

Near Field Communication (NFC) module ²²

NPC300 Near Field Communication module

Miracast

Native Miracast Support ²¹

17. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 is backwards compatible with prior 802.11 specs.

18. For full Intel® vPro™ functionality, Windows, a vPro supported processor, vPro enabled chipset, vPro enabled WLAN card and discrete TPM 2.0 are required. See <https://www.intel.com/content/www/us/en/architecture-and-technology/vpro/vpro-platform-general.html>

19. WWAN module is an optional feature, requires factory configuration and requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. LTE not available on all products, in all regions.

20. Qualcomm® 5G module is optional and must be configured at the factory. Module designed for 5G networks as carriers deploy Evolved-Universal Terrestrial Radio Access New Radio Dual Connectivity (ENDC) with both 100Mhz of 5G NR and LTE channel bandwidth, using 256QAM 4x4, requires activation and separately purchased service contract. Check with service provider for coverage and availability in your area. Connection, upload and download speeds will vary due to network, location, environment network conditions, and other factors. 5G LTE not available on all products, in all regions. Backwards compatible to 4G LTE and 3G HSPA technologies. 5G LTE module is available where carrier supported.

21. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming.

22. Sold separately or as an optional feature.

AUDIO/MULTIMEDIA

Technical Specifications

Audio

Audio by Bang & Olufsen
2 Integrated stereo speakers
Integrated microphone (3-Mic Array)
World-facing 3rd mic

Speaker Power

2W/4ohm Per speaker

Camera

720p HD camera ^{9,22}
720p HD+IR camera ^{9,22}

Sensor

ALS (ambient light sensor)
Magnetometer
Hall Sensor
Gyro
Accelerometer
HP Tamper Lock⁵⁴

9. FHD/HD content required to view FHD/HD images.

22. Sold separately or as an optional feature.

54. HP Tamper Lock must be enabled by the customer or your administrator.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

HP Premium Keyboard, spill resistant, Backlit keyboard and DuraKeys
HP Premium Keyboard, spill resistant, Non-Backlit keyboard and DuraKeys
HP Premium Keyboard, spill resistant, Backlit keyboard and DuraKeys Privacy

Pointing Device

Clickpad with multi-touch gesture support, taps enabled as default
Microsoft Precision Touchpad Default Gestures Support

Function Keys

F1 - Display Switching
F2 - Blank or Privacy
F3 - Brightness Down
F4 - Brightness Up
F5 - Audio Mute
F6 - Volume Down
F7 - Volume Up
F8 - Mic Mute
F9 - Blank or Backlit Toggle
F10 - Insert
F11 - Airplane Mode
F12 - HP Command Center (Programmable Key)
Print Screen
Power Button (with LED)

Technical Specifications

Hidden Function Keys

Fn+R - Break

Fn+S - Sys Rq

Fn+C - Scroll Lock

SOFTWARE AND SECURITY

Preinstalled Software

BIOS

HP BIOSphere Gen6 ²³

HP Drive Lock & Automatic Drive Lock

BIOS Update via Network

Power On Authentication

HP Secure Erase ²⁴

Absolute Persistence Module ²⁵

HP LAN-Wireless Protection

Pre-boot Authentication

Software

HP Connection Optimizer ²⁶

HP Hotkey Support

myHP

HP Support Assistant ²⁷

HP QuickDrop

HP Noise Cancellation Software

Touchpoint Customizer for Commercial

HP Notifications

HP Privacy Settings

HP Wireless Button Driver

HP Power Manager

Tile App ²⁸

HP Programmable Key

HP PC Hardware Diagnostics Windows

Buy Microsoft Office (Sold separately)

HP Smart Support⁵⁶

Manageability Features

HP Driver Packs (download) ²⁹

HP Manageability Integration Kit Gen4 (download) ³⁰

HP System Software Manager (SSM) (download)

HP BIOS Config Utility (BCU) (download)

HP Client Catalog (download)

HP Client Management Script Library (download)

HP Image Assistant (download)

Client Security Software

HP Client Security Manager Gen7 ⁵⁵

Windows Defender ³¹

Technical Specifications

Security Management

Pre-boot Authentication

USB enable/disable (via BIOS)

Power-on password (via BIOS)

Setup password (via BIOS)

HP Fingerprint Sensor ³²

Support for chassis padlocks and cable lock devices

HP Wolf Pro Security Edition³³

HP Sure Click ³⁴

HP Sure Sense ³⁵

HP Sure Start Gen7 ³⁶

HP Sure Run Gen4⁴⁹

HP Sure Recover Gen4⁵⁰

HP Sure Admin ³⁷

HP Sure View ³⁸

TPM 2.0 Embedded Security Chip (Common Criteria EAL4+ Certified) (FIPS 140-2 Level 2 Certified) ³⁹

Secured-core PC capable⁵²

Is the BIOS on this notebook ISO/IEC 19678:2015 (formerly NIST 800-147) compliant?: Yes

UEFI version: 2.7

Class: Class 3

23. HP BIOSphere Gen6 is available on select HP Pro and Elite PCs. Features may vary depending on the platform and configurations.

24. HP Secure Erase for the methods outlined in the National Institute of Standards and Technology Special Publication 800-82 "Clear" sanitation method. HP Secure Erase does not support platforms with Intel® Optane™.

25. Absolute firmware module is shipped turned off and can only be activated with the purchase a license subscription and full activation of the software agent. License subscriptions can be purchased for terms ranging multiple years. Service is limited check with Absolute for availability outside the U.S. Certain conditions apply. For full details visit:

<https://www.absolute.com/about/legal/agreements/absolute/>

26. HP Connection Optimizer requires Windows 10.

27. HP Support Assistant requires Windows and Internet access.

28. Tile is an optional feature that must be configured at the factory and requires Windows 10. Some features require optional subscription to Tile Premium. Tile application for Windows 10 available for download from the Windows Store. Mobile phone app available for download from App Store and Google Play. Requires iOS 11 and greater or Android 6.0 and greater see <https://support.thetileapp.com/hc/en-us/articles/200424778> for more information. HP Tile will function as long as the PC has battery power.

29. HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.

30. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>.

31. Windows Defender Opt in and internet connection required for updates.

32. HP Fingerprint sensor is an optional feature that must be configured at purchase.

33. HP Wolf Pro Security Edition (including HP Sure Click Pro and HP Sure Sense Pro) is available preloaded on select SKUs and depending on the HP product purchased, includes a paid 1-year or 3-year license. The HP Wolf Pro Security Edition software is licensed under the license terms of the HP Wolf Security Software - End-User license Agreement (EULA) that can be found at:

https://support.hp.com/us-en/document/ish_3875769-3873014-16 as that EULA is modified by the following: "7. Term. Unless otherwise terminated earlier pursuant to the terms contained in this EULA, the license for the HP Wolf Pro Security Edition (HP Sure Sense Pro and HP Sure Click Pro) is effective upon activation and will continue for either a twelve (12) month thirty-six (36) month license term ("Initial Term"?). At the end of the Initial Term you may either (a) purchase a renewal license for the HP Wolf Pro Security Edition from HP.com, HP Sales or an HP Channel Partner, or (b) continue using the standard versions of HP Sure Click and HP Sure Sense at no additional cost with no future software updates or HP Support.

34. HP Sure Click requires Windows 10 Pro or Enterprise. See https://bit.ly/2PrLT6A_SureClick for complete details

35. HP Sure Sense is available on select HP PCs and is not available with Windows 10 Home.

36. HP Sure Start Gen7 is available on select HP PCs.

37. HP Sure Admin requires Windows 10, HP BIOS, HP Manageability Integration Kit from <http://www.hp.com/go/clientmanagement> and HP Sure Admin Local Access Authenticator smartphone app from the Android Apple store.

38. HP Sure View Reflect integrated privacy screen is designed to function in landscape orientation.

39. Firmware TPM is version 2.0.

49. HP Sure Recover Gen4 is available on select HP PCs and requires an open network connection. You must back up important

Technical Specifications

files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data.

50. HP Sure Run Gen4 is available on select Windows 10 based HP Pro, Elite and Workstation PCs with select Intel® or AMD processors.

52. Secured-core PC capable requires an Intel vPro or AMD Ryzen Pro processor. Requires 8 GB or more system memory. Secured-core PC functionality can be enabled from the factory.

55. HP Client Security Manager Gen7 requires Windows and is available on the select HP Elite and Pro PCs.

56. HP Smart Support is available to commercial customers through your HP Service Representative and HP Factory Configuration Services; or it can be downloaded at: <http://www.hp.com/smart-support>. HP Smart Support automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insight

SMART CARD READER

Smart Card Reader (Optional)	Model number	Alcor AU9560
	FIPS 201 Compliant	Yes

POWER

Power Supply

HP Smart 45 W External AC power adapter ⁴⁰

HP Smart 45 W External AC power adapter, 2-prong (Japan only)⁴⁰

HP Smart 65 W External AC power adapter ⁴⁰

HP Smart 65 W EM External AC power adapter⁴⁰

HP 65 W Slim USB Type-C AC power adapter ⁴⁰

HP 65 W USB Type-C AC power adapter

Primary Battery

HP Long Life 3-cell, 53 Wh Li-ion ^{41,51}

Power Cord

2-wire plug - 1m (Japan only)

3-wire plug - 1m

Premium - 1m

Battery life

Up to 13 hours and 15 minutes ⁴²

Battery Weight

210g±10g

40. Availability may vary by country.

41. Battery is internal and not replaceable by customer. Serviceable by warranty.

42. Windows 10 MM18 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

51. Actual battery Watt-hours (Wh) will vary from design capacity. Battery capacity will naturally decrease with shelf life, time, usage, environment, temperature, system configuration, loaded apps, features, power management settings and other factors.

WEIGHTS & DIMENSIONS

Technical Specifications

Product Weight

Touch

Starting at 2.98 lb (1.35 kg) ⁴³

Product Dimensions

12.1 x 8.07 x 0.71 in

30.75 x 20.5 x 1.79 cm

43. Weight will vary by configuration.

PORTS/SLOTS

2 Thunderbolt™ 4 with USB4™ Type-C® 40Gbps signaling rate ⁵³

2 Super Speed USB Type-A 5Gbps signaling rate (1 charging)

1 HDMI 2.0b ⁴⁴

1 Headphone/microphone combo

1 4.5 mm AC Adapter Port

1 nano SIM card slot⁴⁵

1 Smartcard reader (Optional)

1 Nano Security Lock Slot (Lock sold separately)

44. HDMI cable sold separately

45. All units have a SIM card slot and icon but units that do not support WWAN are shipped with a non-removable SIM slot plug.

53. SuperSpeed USB 20Gbps is not available with Thunderbolt™ 4

SERVICE AND SUPPORT

1-year and 3-year limited warranties and 90 day software limited warranty options depending on country.

Batteries have a default one year limited warranty except for HP Long Life batteries which will follow the one or three year warranty of the platform. Refer to <http://www.hp.com/support/batterywarranty/>

for additional battery information. On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>. ⁴⁶

46. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

SYSTEM UNIT

Technical Specifications

Stand-Alone Power

Requirements (AC Power)	Nominal Operating Voltage	19.5V
	Average Operating Power	1.825W
	Integrated graphics	Yes
	Discrete Graphics	N/A
	Max Operating Power	UMA < 45W

Temperature

Operating	32° to 95° F (0° to 35° C)
Non-operating	41° to 95° F (5° to 35° C) (writing optical)

Relative Humidity

Operating	10% to 90%, non-condensing
Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature

Shock

Operating	40 G, 2 ms, half-sine
Non-operating	200 G, 2 ms, half-sine

Random Vibration

Operating	0.75 grms
Non-operating	1.50 grms

Altitude (unpressurized)

Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)

Planned Industry Standard Certifications

UL	YES
CSA	YES
FCC Compliance	YES
ENERGY STAR®	Select models ⁴⁷
EPEAT®	EPEAT 2019 Gold in United States ⁴⁸
ICES	YES
Australia /	YES
NZ A-Tick Compliance	YES
CCC	YES
Japan VCCI Compliance	YES
KC	YES
BSMI	YES
CE Marking Compliance	YES
BNCI or BELUS	YES
CIT	YES
GOST	YES
Saudi Arabian Compliance (ICCP)	YES
SABS	YES

Technical Specifications

47. Configurations of the HP EliteBook x360 830 G8 Notebook PC that are ENERGY STAR® certified are identified as HP EliteBook x360 830 G8 Notebook ENERGY STAR on HP websites and on <http://www.energystar.gov>.

48. Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit www.epeat.net for more information.

DISPLAYS

Note: All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

1. Actual brightness will be lower with touchscreen or Sure View.

LCD 13.3 inch Diagonal FHD (1920 x 1080) Anti-Glare WLED UWVA 45% cg 250nits eDP 1.2 w/o PSR	Outline Dimensions (W x H x D)	299.06 x 176.54 mm (max) (FPC folding included)
	Active Area	293.76 x 165.24 mm (typ.)
	Weight	260 g (max)
	Diagonal Size	13.3 inch
	Thickness	3.0 mm/ 5.0 mm (PCB) (max)
	Interface	eDP 1.2 (2lane)
	Surface Treatment	BrightView Glass
	Touch Enabled	Yes
	Contrast Ratio	600:1 (typ.)
	Refresh Rate	60 Hz
	Brightness	250 nits (Panel Only) ¹
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	NTSC 45%
Color Depth	6 bits	
Viewing Angle	UWVA 85/85/85/85	

Technical Specifications

LCD 13.3 inch Diagonal FHD (1920 x 1080) Anti-Glare WLED UWVA sRGB 100% cg 400nits eDP 1.4+PSR2 bent	Outline Dimensions (W x H x D)	299.06 x 176.54 mm (max) (FPC folding included)
	Active Area	293.76 x 165.24 mm (typ.)
	Weight	175 g (max)
	Diagonal Size	13.3 inch
	Thickness	2.0 mm / 3.8 mm (PCB) (max)
	Interface	eDP 1.4 w/ PSRII (2 lane)
	Surface Treatment	BrightView Glass
	Touch Enabled	Yes
	Contrast Ratio	1500:1 (typ.)
	Refresh Rate	60Hz
	Brightness	400 nits (Panel Only) ¹
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	sRGB 100% (NTSC 72%)
	Color Depth	8 bits
	Viewing Angle	UWVA 85/85/85/85

LCD 13.3-in Diagonal FHD (1920 x 1080) Anti-Glare WLED UWVA 72% cg 1000nits eDP 1.4+PSR HP Sure View Reflect	Outline Dimensions (W x H x D)	299.06 x 176.54 mm (max)
	Active Area	293.76 x 165.24 mm (typ.)
	Weight	220 g (max)
	Diagonal Size	13.3 inch
	Thickness	3.9 mm (max)
	Interface	eDP 1.4 + PSR (4 lane)
	Surface Treatment	Anti-glare glass
	Touch Enabled	Yes
	Contrast Ratio	1500:1 (typ.)
	Refresh Rate	60 Hz
	Brightness	1000 nits ¹
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	72%
	Color Depth	8bits
	Viewing Angle	UWVA 85/85/85/85

Technical Specifications

Panel LCD 13.3 inch FHD (1920x1080) Anti-Glare WLED UWVA sRGB 100percent cg 400nits eDP 1.4+PSR2 bent	Outline Dimensions (W x H x D)	299.06 x 176.54 mm (max) (FPC folding included)
	Active Area	293.76 x 165.24 mm (typ.)
	Weight	175 g (max)
	Diagonal Size	13.3 inch
	Thickness	2.0 mm / 3.8 mm (PCB) (max)
	Interface	eDP 1.4 w/ PSRII (2 lane)
	Surface Treatment	BrightView Glass
	Touch Enabled	Yes
	Contrast Ratio	1500:1 (typ.)
	Refresh Rate	60Hz
	Brightness	400 nits (Panel Only) ¹
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	sRGB 100% (NTSC 72%)
	Color Depth	8 bits
	Viewing Angle	UWVA 85/85/85/85

Panel LCD 13.3-in FHD (1920x1080) Anti-Glare WLED UWVA 72percent cg 1000nits eDP 1.4+PSR HP Sure View Reflect	Outline Dimensions (W x H x D)	299.06 x 176.54 mm (max)
	Active Area	293.76 x 165.24 mm (typ.)
	Weight	220 g (max)
	Diagonal Size	13.3 inch
	Thickness	3.9 mm (max)
	Interface	eDP 1.4 + PSR (4 lane)
	Surface Treatment	Anti-glare glass
	Touch Enabled	Yes
	Contrast Ratio	1500:1 (typ.)
	Refresh Rate	60 Hz
	Brightness	1000 nits ¹
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	72%
	Color Depth	8bits
	Viewing Angle	UWVA 85/85/85/85

STORAGE AND DRIVES

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10 and 11) is reserved for system recovery software

Technical Specifications

SSD 128GB 2280 PCIe-3x2 Three Layer Cell	Form Factor	M.2 2280
	Capacity	128GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Weight	0.02 lb (10 g)
	Interface	PCIe NVMe Gen3X4 or Gen3X2
	Maximum Sequential Read	Up To 2047 MB/s
	Maximum Sequential Write	Up To 1200 MB/s
	Logical Blocks	250,069,680
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	ATA Security; TRIM; L1.2

SSD 256GB 2280 PCIe-3x4 NVMe Self Encrypted OPAL2 TLC	Form Factor	M.2 2280
	Capacity	256GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	ATA-8, SATA 3.0
	Maximum Sequential Read	Up To 3500 MB/s
	Maximum Sequential Write	Up To 2200 MB/s
	Logical Blocks	500,118,192
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	ATA Security (Option); TCG Opal 2.0; TRIM; L1.2

SSD 256GB 2280 PCIe NVMe Value Solid State Drive	Form Factor	M.2 2280
	Capacity	256GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 1700 MB/s
	Maximum Sequential Write	Up To 600 MB/s
	Logical Blocks	500,118,192
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

Technical Specifications

SSD 256GB 2280 M2 PCIe-3x4 SS NVMe TLC	Form Factor	M.2 2280
	Capacity	256 GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Weight	0.02 lb (10 g)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	2800 ~ 3500 MB/s
	Maximum Sequential Write	1400 ~ 2200 MB/s
	Logical Blocks	500,118,192
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	ATA Security; TRIM; L1.2

SSD 512GB 2280 M2 PCIe- 3x4 SS NVMe TLC	Form Factor	M.2 2280
	Capacity	512GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 2600 MB/s
	Maximum Sequential Write	Up To 1400 MB/s
	Logical Blocks	1,000,215,216
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
Features	TRIM; L1.2	

SSD 512GB 2280 PCIe-3x4 NVMe Self Encrypted OPAL2 TLC	Form Factor	M.2 2280
	Capacity	512GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 2900 MB/s
	Maximum Sequential Write	Up To 1400 MB/s
	Logical Blocks	1,000,215,215
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
Features	TRIM; L1.2	

Technical Specifications

SSD 512GB 2280 PCIe NVMe Value	Form Factor	M.2 2280
	Capacity	512GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up to 1700 MB/s
	Maximum Sequential Write	Up to 1500 MB/s
	Logical Blocks	1,000,215,215
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

SSD 1TB 2280 PCIe-3x4 NVMe TLC SS	Form Factor	M.2 2280
	Capacity	1TB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up to 3480 MB/s
	Maximum Sequential Write	Up to 2800 MB/s
	Logical Blocks	2,000,409,264
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

SSD 512GB 2280 PCIe-3x2x2 NVMe+SSD 32GB 3D Xpoint	Form Factor	M.2 2280
	Capacity	512 GB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up to 2400 MB/s
	Maximum Sequential Write	Up to 1300 MB/s
	Logical Blocks	1,000,215,215
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

Technical Specifications

SSD 2TB 2280 PCIe-3x4 NVMe Three Layer Cell	Form Factor	M.2 2280
	Capacity	2TB
	NAND Type	TLC
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 3500 MB/s
	Maximum Sequential Write	Up To 3000MB/s
	Logical Blocks	3,907,029,168
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	ATA Security; TRIM; L1.2

NETWORKING/COMMUNICATIONS

Intel® Wi-Fi® 6 AX201 + Bluetooth® 5 (802.11ax 2x2, vPro™, supporting gigabit data rate⁵) vPro^{®1}	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v	
	Interoperability	Features Wi-Fi 6 technology	
	Frequency Band	<ul style="list-style-type: none"> • 802.11b/g/n/ax 2.402 - 2.482 GHz • 802.11a/n/ac/ax 4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz"802.11b/g/n/ax 	
		Data Rates	<ul style="list-style-type: none"> • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac :MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, ,80MHz & 160MHz) • 802.11ax MCS0 ~ MCS11, (1SS and 2SS) (20MHz, 40MHz, ,80MHz & 160MHz)
		Modulation	Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM,1024QAM
		Security³	<ul style="list-style-type: none"> • IEEE compliant 64 / 128 bit WEP encryption for a/b/g mode only

Technical Specifications

	<ul style="list-style-type: none"> • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none"> • 802.11g : +17.5dBm minimum • 802.11a : +18.5dBm minimum • 802.11n HT20(2.4GHz): +15.5dBm minimum • 802.11n HT40(2.4GHz): +14.5dBm minimum • 802.11n HT20(5GHz): +15.5dBm minimum • 802.11n HT40(5GHz): +14.5dBm minimum • 802.11ac VHT80(5GHz): +11.5dBm minimum • 802.11ac VHT160(5GHz): +11.5dBm minimum • 802.11ax HT40(2.4GHz): +10dBm minimum • 802.11ax VHT160(5GHz): +10dBm minimum
Power Consumption	<ul style="list-style-type: none"> • Transmit mode:2.0 W • Receive mode:1.6 W • Idle mode (PSP180 mW(WLAN Associated) • Idle mode:50 mW(WLAN unassociated) • Connected Standby/Modern Standby: 10mW • Radio disabled: 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	<ul style="list-style-type: none"> • 802.11b, 1Mbps: 93.5dBm maximum • 802.11b, 11Mbps: 84dBm maximum • 802.11a/g, 6Mbps: -86dBm maximum • 802.11a/g, 54Mbps: 72dBm maximum • 802.11n, MCS07: 67dBm maximum • 802.11n, MCS15: 64dBm maximum • 802.11ac, MCS0: 84dBm maximum • 802.11ac, MCS9: 59dBm maximum • 802.11ax, MCS11(HT40): -59dBm maximum • 802.11ax, MCS11(VHT160): -58.5dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard with CNVi Interface
Dimensions	Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON

Technical Specifications

HP Integrated Module with Bluetooth 4.0/4.1/4.2/5.0/5.1 Wireless Technology

Bluetooth Specification	4.0/4.1/4.2/5.0/5.1 Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Signaling Data Rate	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 9.5 dBm for BR and EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth Software Supported	Microsoft Windows Bluetooth Software
Link Topology	
Power Management	Microsoft Windows ACPI, and USB Bus Support
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Power Management Certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 -Link Layer Privacy LE Privacy 1.2 -Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
Security & Manageability	Intel® vPro™ support with appropriate Intel® chipset components

1. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 is backwards compatible with prior 802.11 specs. Only available in countries where 802.11ax is supported.
2. Maximum output power may vary by country according to local regulations.
12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
3. Check latest software/driver release for updates on supported security features.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. Wi-Fi 5 or 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

Technical Specifications

Intel® Wi-Fi® 6 AX201 + Bluetooth®5 (802.11ax 2x2, non-vPro, supporting gigabit data rate⁵) non-vPro¹	Wireless LAN Standards	<ul style="list-style-type: none"> IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v
	Interoperability	Features Wi-Fi 6 technology
	Frequency Band	<ul style="list-style-type: none"> • 802.11b/g/n/ax 2.402 - 2.482 GHz • 802.11a/n/ac/ax 4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz"
	Data Rates	<ul style="list-style-type: none"> • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac: MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, ,80MHz & 160MHz) • 802.11ax: MCS0 ~ MCS11, (1SS and 2SS) (20MHz, 40MHz, ,80MHz & 160MHz)
	Modulation	Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
	Security³	<ul style="list-style-type: none"> • IEEE compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI
	Network Architecture	Ad-hoc (Peer to Peer)
	Models	Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power²	<ul style="list-style-type: none"> • 802.11b : +18.5dBm minimum • 802.11g : +17.5dBm minimum • 802.11a : +18.5dBm minimum • 802.11n HT20(2.4GHz) : +15.5dBm minimum • 802.11n HT40(2.4GHz) : +14.5dBm minimum • 802.11n HT20(5GHz) : +15.5dBm minimum • 802.11n HT40(5GHz) : +14.5dBm minimum

Technical Specifications

	<ul style="list-style-type: none"> • 802.11ac VHT80(5GHz) : +11.5dBm minimum • 802.11ac VHT160(5GHz) : +11.5dBm minimum • 802.11ax HT40(2.4GHz) : +10dBm minimum • 802.11ax VHT160(5GHz) : +10dBm minimum
Power Consumption	Transmit mode 2.0 W Receive mode 1.6 W Idle mode (PSP) 180 mW (WLAN Associated) Idle mode 50 mW (WLAN unassociated) Connected Standby 10mW Radio disabled 8 mW"
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	<ul style="list-style-type: none"> • 802.11b, 1Mbps: 93.5dBm maximum • 802.11b, 11Mbps: 84dBm maximum • 802.11a/g, 6Mbps: 86dBm maximum • 802.11a/g, 54Mbps: 72dBm maximum • 802.11n, MCS07: 67dBm maximum • 802.11n, MCS15: 64dBm maximum • 802.11ac, MCS0: 84dBm maximum • 802.11ac, MCS9: 59dBm maximum • 802.11ax, MCS11(HT40): -59dBm maximum • 802.11ax, MCS11(VHT160): -58.5dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard with CNVi Interface
Dimensions	Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED Off - Radio ON

HP Integrated Module with Bluetooth 4.0/4.1/4.2/5.0/5.1 Wireless Technology

Bluetooth Specification	4.0/4.1/4.2/5.0/5.1 Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 9.5 dBm for BR and EDR.

Technical Specifications

Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth Software Supported Link Topology	Microsoft Windows Bluetooth Software
Power Management	Microsoft Windows ACPI, and USB Bus Support
Certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Power Management Certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 -Link Layer Privacy LE Privacy 1.2 -Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

1. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 is backwards compatible with prior 802.11 specs. Only available in countries where 802.11ax is supported.
2. Maximum output power may vary by country according to local regulations. 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
3. Check latest software/driver release for updates on supported security features.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. Wi-Fi 5 or 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

Technical Specifications

Intel® XMM™ 7360 LTE-Advanced	Technology/Operating bands	FDD LTE: LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 1700 (Band 4), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 1400 (Band 11), 700 (Band 12), 700 (Band 13) 700 (Band 17), 850 (Band 18), 850 (Band 19), 800 (Band 20), 1450 (Band 21), 850 (Band 26) 700 (Band 28) MHz, 700 (Band 29), 2300 (Band 30), 2100 (Band 66) MHz TDD LTE: 2600 (Band 38), 1900 (Band 39) 2300 (Band 40), 2500 (Band 41) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 1700 (Band 4), 850 (Band 5), 900 (Band 8) MHz
	Wireless protocol standards	3GPP Release 11 LTE Specification CAT.9, MAX 60MHz aggregation BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification
	GPS	Standalone, A-GPS (MS-B and LTO)
	GPS bands	GPS 1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz, Beidou 1561.098 ± 2.046 MHz
	Maximum data rates	LTE: 450 Mbps (DL 3CA), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload)
	Maximum output power	LTE: 23 dBm HSPA+: 23.5 dBm
	Maximum power consumption	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average)
	Form Factor	M.2, 3042-S3 Key B
	Weight	6 g
	Dimensions (Length x Width x Thickness)	42 x 30 x 2.3 mm

WWAN module is an optional feature, requires factory configuration and requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. LTE not available on all products, in all regions.

Technology/ Operating bands	WCDMA/HSDPA/HSUPA/HSPA+ operating bands: Band 1: 1920 to 1980 MHz (UL), 2110 to 2170 MHz (DL) Band 2: 1850 to 1910 MHz (UL), 1930 to 1990 MHz (DL) Band 4: 1710 to 1755 MHz (UL), 2110 to 2155 MHz (DL) Band 5: 824 to 849 MHz (UL), 869 to 894 MHz (DL) Band 6: 830 to 840 MHz (UL), 875 to 885 MHz (DL) Band 8: 880 to 915 MHz (UL), 925 to 960 MHz (DL) Band 9: 1750 to 1785 MHz(UL), 1845to 1880 MHz (DL) Band 19: 830 to 845 MHz (UL), 875 to 890 MHz (DL) LTE FDD/TDD operating bands: Band 1: 1920 to 1980 MHz (UL), 2110 to 2170 MHz (DL) Band 2: 1850 to 1910 MHz (UL), 1930 to 1990 MHz (DL) Band 3: 1710 to 1785 MHz (UL), 1805 to 1880 MHz (DL) Band 4: 1710 to 1755 MHz (UL), 2110 to 2155 MHz (DL) Band 5: 824 to 849 MHz (UL), 869 to 894 MHz (DL) Band 7: 2500 to 2570 MHz (UL), 2620 to 2690 MHz (DL) Band 8: 880 to 915 MHz (UL), 925 to 960 MHz (DL) Band 12: 699 to 716 MHz (UL), 729 to 746 MHz (DL) Band 13: 777 to 787 MHz (UL), 746 to 756 MHz (DL) Band 14: 788 to 798 MHz (UL), 758 to 768 MHz (DL) Band 17: 704 to 716 MHz (UL), 734 to 746 MHz (DL)
--	---

Technical Specifications

**Qualcomm®
Snapdragon™ X55
5G Cat 20¹**

Band 18: 815 to 830 MHz (UL), 860 to 875 MHz (DL)
 Band 19: 830 to 845 MHz (UL), 875 to 890 MHz (DL)
 Band 20: 832 to 862 MHz (UL), 791 to 821 MHz (DL)
 Band 25: 1850 to 1915 MHz (UL), 1930 to 1995 MHz (DL)
 Band 26: 814 to 849 MHz (UL), 859 to 894 MHz (DL)
 Band 28: 703 to 748 MHz (UL), 758 to 803 MHz (DL)
 Band 29: 717 to 728 MHz (DL)
 Band 30: 2305 to 2315 MHz (UL) 2350 to 2360 MHz (DL)
 Band 32: 1452 to 1496 MHz (DL)
 Band 34: 2010 to 2025 MHz (UL/DL)
 Band 38: 2570 to 2620 MHz (UL/DL)
 Band 39: 1880 to 1920 MHz (UL/DL)
 Band 40: 2300 to 2400 MHz (UL/DL)
 Band 41: 2496 to 2690 MHz (UL/DL)
 Band 42: 3400 to 3600 MHz (UL/DL)
 Band 46: 5150 to 5925 MHz (DL)
 Band 48: 3550 to 3700 MHz (UL/DL)
 Band 66: 1710 to 1800 MHz (UL), 2110 to 2200 MHz (DL)
 Band 71: 663 to 698 MHz (UL), 617 to 652 MHz (DL)
 5G NR Sub 6GHz
 n1: 1920 to 1980 MHz (UL), 2110 to 2170 MHz (DL)
 n2: 1850 to 1910 MHz (UL), 1930 to 1990 MHz (DL)
 n3: 1710 to 1785 MHz (UL), 1805 to 1880 MHz (DL)
 n5: 824 to 849 MHz (UL), 869 to 894 MHz (DL)
 n7: 2500 to 2570 MHz (UL), 2620 to 2690 MHz (DL)
 n8: 880 to 915 MHz (UL), 925 to 960 MHz (DL)
 n12: 699 to 716 MHz (UL), 729 to 746 MHz (DL)
 n20: 832 to 862 MHz (UL), 791 to 821 MHz (DL)
 n28: 703 to 748 MHz (UL), 758 to 803 MHz (DL)
 n41: 2496 to 2690 MHz (UL/DL)
 n66: 1710 to 1800 MHz (UL), 2110 to 2200 MHz (DL)
 n71: 663 to 698 MHz (UL), 617 to 652 MHz (DL)
 n77: 3300 to 4200 MHz (UL/DL)
 n78: 3300 to 3800 MHz (UL/DL)
 n79: 4400 to 5000 MHz (UL/DL)

Wireless protocol standards

5G NR Air Interface
 | 3GPP Rel15 5G NR sub-6
 LTE Rel14
 20 layers and 2 Gbps downlink (DL) throughput - 4 × 4 MIMO across 5x CA
 200 Mbps uplink (UL) throughput - 40 MHz ULCA and 256 QAM WCDMA
 R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification

**GPS
GPS bands**

Standalone, A-GPS (MS-A, MS-B)
 GPS: L1 (1575.42MHz); L5 (1176MHz)
 GLONASS: L1 (1602MHz)
 BeidouB1(1561.098MHz)
 Galileo E1 (1575.42); E5a (1176MHz)

Maximum data rates

5G sub 6G : 3.8 Gbps
 LTE: ue-CategoryDL 20, (DL : 2 Gbps)
 ue-CategoryUL 13 , (UL: 150Mbps)
 DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload)
 HSPA+: 21Mbps (Download), 5.76 Mbps (Upload)

Maximum output power

LTE: 23 dBm in all band except B41
 LTE B41 HPUE = 26dBm
 HSPA+: 23.5 dBm

Technical Specifications

Maximum power consumption	5G Sub 6 : 2500 mA LTE: 1,300 mA (peak); 1100 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	8 g
Dimensions (Length x Width x Thickness)	42 mm × 30 mm × 2.6 mm

1. Qualcomm® 5G module is optional and must be configured at the factory. Module designed for 5G networks as carriers deploy Evolved-Universal Terrestrial Radio Access New Radio Dual Connectivity (ENDC) with both 100Mhz of 5G NR and LTE channel bandwidth, using 256QAM 4x4, requires activation and separately purchased service contract. Check with service provider for coverage and availability in your area. Connection, upload and download speeds will vary due to network, location, environment, network conditions, and other factors. 5G LTE not available on all products, in all regions. Backwards compatible to 4G LTE and 3G HSPA technologies. 5G LTE module is available where carrier supported.

NXP NPC300 Near Field Communication Module	Dimensions (L x W x H)	Module 17 mm by 10 mm by 2.0 mm
	Chipset	NPC300
	System interface	I ² C
	NFC RF standards	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 ISO/IEC 18092 ECMA-340 NFCIP-1 Target and Initiator ECMA-320 NFCIP-2
	NFC Forum Support	Tag Type 1, Type 2, Type3 and Type 4, NFCIP-1 and NFCIP-2
	Reader (PCD-VCD) Mode¹	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 MIFARE 1K MIFARE 4K MIFARE DESFire FeliCa Jewel and Topaz cards
	Card Emulation (PICC-VICC) Mode¹	ISO/IEC 14443 A ISO/IEC 14443 B and B' MIFARE FeliCa
	Frequency	13.56 MHz
	NFC Modes Supported	Reader/Writer, Peer-to-Peer
	Raw RF Data Rates	106, 212, 424, 848 kbps
	Operating temperature	-25°C to 80°C
	Storage temperature	-25°C to 125°C
	Humidity	10-90% operating 5-95% non-operating
	Supply Operating voltage	2.7 to 5.5 Volts
	I/O Voltage	1.8V or 3.3V

**Power Consumption
(Booster enable,
VBAT= 3.3V,
VCC_BOOST = 5V)**

Technical Specifications

Mode	Power Consumption, Typical (2)
Plling	710.93 mW
Detected Test Tag Type 1	152.09 mW
Detected Test Tag Type 2	341.26 mW
Detected Test Tag Type 3	383.76 mW
Detected Test Tag Type 4	312.26 mW
Antenna	Antenna connector, 0.3mm pitch, 7 connector FPC. Antenna matching is external to module.

Built-in Tile™ module¹

Bluetooth Specification	Bluetooth Core Specification v5.0
Frequency Band	2400 to 2483.5 MHz
Number of Available Channels	0-39 Channels with 2MHz bandwidth at each channel
Data Rate	BLE : 1 Mbps data rate
Transmit Power	Max TX power : 8dBm
Power Consumption	"<0.1mW at idle mode (ready to be found) "
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 3042 : 30 x 42 x 2.3 mm
Weight	Weight : 4.0g
Operating Voltage	DC 3.135V~3.6V, Typical 3.3V
Temperature	Operating: -10°C ~+55°C Non-operating: -40°C ~+85°C

1. Tile is an optional feature that must be configured at the factory and requires Windows 10. Some features require optional subscription to Tile Premium. Tile application for Windows 10 available for download from the Windows Store. Mobile phone app available for download from App Store and Google Play. Requires iOS 11 and greater or Android 6.0 and greater see <https://support.thetileapp.com/hc/en-us/articles/200424778> for more information. HP Tile will function as long as the PC has batter power.

POWER

AC Adapter 65 Watt Smart nPFC Standard Barrel 4.5mm Right Angle 1.8m	Dimensions (H x W x D)	107.0x47.0x30.0mm
	Weight	unit: 250g +/- 10g <i>Not including power cord. Power cord varies by country</i>
	Input	Input Efficiency 88.0 % at 115 Vac and 89.0 % at 230Vac
		Input frequency range 47 ~ 63 Hz
		Input AC current Max. 1.7 A at 90 Vac

Technical Specifications

Output	Output power	65 W
	DC output	19.5 V
	Hold-up time	5ms at 115 Vac input
	Output current limit	<11.0A
Connector	4.5mm Barrel Type	
Environmental Design	Operating temperature	32°F to 95°F (0°to 35°C)
	Non-operating (storage) temperature	-4°F to 185°F (-20°to 85°C)
	Altitude	0 to 16,400 ft (0 to 5000m)
	Humidity	20% to 95%
	Storage Humidity	10% to 95%
EMI and Safety Certifications	ECE Mark - full compliance with LVD and EMC directives* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.* MTBF - over 200,000 hours at 25°C ambient condition.	

AC Adapter 45 Watt Smart nPFC Standard Barrel 4.5mm Right Angle 1.8m	Dimensions (H x W x D)	95.0x40.0x26.5mm
	Weight	unit: 200g +/- 10g Not including power cord. Power cord varies by country
	Input	Input Efficiency 87.74 % at 115 Vac and 88.4 % at 230Vac
		Input frequency range 47 ~ 63 Hz
		Input AC current Max. 1.4 A at 90 Vac
	Output	Output power 45 W
		DC output 19.5 V
		Hold-up time 5ms at 115 Vac input
		Output current limit <8.0 A
	Connector	4.5mm Barrel Type, 3 pin/grounded, mates with interchangeable cords
	Environmental Design	Operating temperature 32°F to 95°F (0°to 35°C)
		Non-operating (storage) temperature -4°F to 185°F (-20°to 85°C)
		Altitude 0 to 16,400 ft (0 to 5000m)
		Humidity 20% to 95%
		Storage Humidity 10% to 95%
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.	

Technical Specifications

AC Adapter 45 Watt Smart	Dimensions (H x W x D)	95x45x26.8mm
nPFC Standard Barrel	Weight	unit: 200g +/- 10g
4.5mm Right Angle 1.8m		Not including power cord. Power cord varies by country
2prong	Input	Input Efficiency 87.74 % at 115 Vac and 88.4 % at 230Vac
		Input frequency range 47 ~ 63 Hz
		Input AC current Max. 1.4 A at 90 Vac
	Output	Output power 45 W
		DC output 19.5 V
		Hold-up time 5ms at 115 Vac input
		Output current limit <8.0 A
	Connector	4.5 mm Barrel Type
	Environmental Design	Operating temperature 32°F to 95°F (0°to 35°C)
		Non-operating (storage) temperature -4°F to 185°F (-20°to 85°C)
		Altitude 0 to 16,400 ft (0 to 5000m)
		Humidity 20% to 95%
		Storage Humidity 10% to 95%
	EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.

AC Adapter 65 Watt Smart	Dimensions (H x W x D)	102x55x30mm
nPFC EM Barrel 4.5mm	Weight	270g +/- 10g
New EM		Not including power cord. Power cord varies by country
	Input	Input Efficiency 88.0 % at 115 Vac and 89.0 % at 230Vac
		Input frequency range 47 to 63 Hz
		Input AC current Max. 1.7 A at 90 Vac
	Output	Output Power 65 W
		DC output 19.5V
		Hold-up time 5 msec at 115 VAC input
		Output current limit <11.0A
	Connector	4.5mm Barrel Type, 3 pin/grounded, mates with interchangeable cords
	Environmental Design	Operating temperature 32°F to 95°F (0°to 35°C)
		Non-operating (storage) temperature -4°F to 185°F (-20°to 85°C)
		Altitude 0 to 16,400 ft (0 to 5000m)
		Humidity 20% to 95%
		Storage Humidity 10% to 95%

Technical Specifications

EMI and Safety Certifications

CE Mark - full compliance with LVD and EMC directives
 Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV;
 Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.
 MTBF - over 200,000 hours at 25°C ambient condition.

AC Adapter 65 Watt nPFC Standard USB Type-C Straight 1.8m

Dimensions (H x W x D)

90.0x51x28.5mm

Weight

unit: 250g +/- 10g

Not including power cord. Power cord varies by country

Input

Input Efficiency

81.5% min at 115 Vac/ 230Vac @ 5V/3A
 86.7% min at 115 Vac/ 230Vac @ 9V/3A
 88% min at 115 Vac/ 230Vac @ 12V/5A
 89% min at 115 Vac/ 230Vac @ 15V/4.33A
 89% min at 115 Vac/ 230Vac @ 20V/3.25A

Input frequency range

47 to 63 Hz

Input AC current

1.6 A at 90 VAC and maximum load

Output

Output power

65 W

DC output

5V/9V/12V/15V/20V

Hold-up time

5 msec at 115 VAC input

Output current limit

8.0A MAXIMUM

Connector

USB Type-C

Environmental Design

Operating temperature

32°F to 95°F (0° to 35°C)

Non-operating (storage) temperature

-4°F to 185°F (-20° to 85°C)

Altitude

0 to 16,400 ft (0 to 5000m)

Humidity

20% to 95%

Storage Humidity

10% to 95%

EMI and Safety Certifications

CE Mark - full compliance with LVD and EMC directives
 Worldwide safety standards - IEC60950, EN60950, UL60950, ul62368, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.
 MTBF - over 200,000 hours at 25°C ambient condition."

AC Adapter 65 Watt nPFC Slim USB Type-C Straight 1.8m

Dimensions (H x W x D)

88x53.5x21mm

Weight

unit: 220g +/- 10g

Not including power cord. Power cord varies by country

Input

Input Efficiency

81.5% min at 115 Vac/ 230Vac @ 5V/3A
 86.7% min at 115 Vac/ 230Vac @ 9V/3A
 88% min at 115 Vac/ 230Vac @ 12V/5A
 89% min at 115 Vac/ 230Vac @ 15V/4.33A
 89% min at 115 Vac/ 230Vac @ 20V/3.25A

Input frequency range

47 to 63Hz

Input AC current

1.6 A at 90 VAC and maximum load

Technical Specifications

Output	Output Power	65 W
	DC output	5V/9V/12V/15V/20V
	Hold-up time	5 msec at 115 VAC input
	Output current limit	<8.0A
Connector	USB Type C	
Environmental Design	Operating temperature	32°F to 95°F (0° to 35°C)
	Non-operating (storage) temperature	-4°F to 185°F (-20° to 85°C)
	Altitude	0 to 16,400 ft (0 to 5000m)
	Humidity	5% to 95%
	Storage Humidity	5% to 95%
EMI and Safety Certifications	<p>CE Mark - full compliance with LVD and EMC directives</p> <p>Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV;</p> <p>Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.</p> <p>MTBF - over 100,000 hours at 25°C ambient condition.</p>	
HP 3 Cell 53 Wh Long Life - PL Fast Charge	Dimensions (H x W x D)	267.3x59.75x7.5mm
	Weight	210g±10g Not including power cord. Power cord varies by country
	Cells/Type	3cell Lithium-Ion Polymer cell / 645180
	Voltage	11.55V
	Amp-hour capacity	4590mAh
	Watt-hour capacity¹	53Wh
	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14° to 122° F (-10° to 60° C)
	Fuel Gauge LED	NA
	Optional Travel Battery Available	No

1. Actual battery Watt-hours (Wh) will vary from design capacity. Battery capacity will naturally decrease with shelf life, time, usage, environment, temperature, system configuration, loaded apps, features, power management settings and other factors.

FINGERPRINTREADER

Technical Specifications

Model:

Synaptics Validity VFS7552 touch sensor

Mobile Voltage Operation:

3.0V to 3.6V

Operating Temperature:

14° - 167°F (-10°-75°C)

Current Consumption Image:

36mA peak

Low Latency Wait For Finger:

950 uA

Capture Rate:

30 cm/sec

ESD Resistance:

IEC 61000-4-2 4B (+15KV)

Detection Matrix:

200*1 (Plus another secondary line) / 508 dpi / 10mm sensor area

FRR (False Reject Rate) / FAR:

(False Acceptance Rate) FRR ~ 1% @ 1:50K FAR

ENVIRONMENTAL DATA

Sustainable Impact Specifications

- Bulk packaging available
- Low halogen¹
- Ocean-Bound Plastic in speaker enclosure²
- Outside Box and corrugated cushions are 100% sustainably sourced and recyclable³
- 35% post-consumer recycled plastic⁴

1. External power supplies, WWAN modules, power cords, cables and peripherals excluded.

2. Percentage of ocean-bound plastic contained in each component varies by product

3. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.

4. Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.

COUNTRY OF ORIGIN

China

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part Number
Cases	HP Prelude Pro Top Load	1X645AA
	HP Prelude Pro Backpack	1X644AA
	HP Business Backpack (17.3")	2SC67AA
	HP Business Case (15.6")	2SC66AA
	HP Business Slim Top Load (14.1")	2SC65AA
	HP 14.1 Business Sleeve	2UW01AA
	HP 13.3 Business Sleeve	2UW00AA
Docking	HP Thunderbolt Dock 120W G2	2UK37AA
	HP TB Dock w/ Combo Cable (230W)	3TR87AA
	HP TB Dock Audio Module	3AQ21AA
	HP TB Dock 230W G2 Cable	3XB95AA
	HP TB Dock 120W G2 cable	3XB94AA
	HP TB Dock G2 combo cable	3XB96AA
	HP USB Type-C Mini Dock	1PM64AA
	HP USB Type-C Dock G5	5TW10AA
HP USB Type-C /A Universal Dock G2	5TW13AA	
Input / Output	HP Wireless Rechargeable 950MK Mouse and Keyboard	3M165AA
	HP Wired Desktop 320MK Mouse and Keyboard	9SR36AA
	HP Wireless Premium Keyboard	Z9N41AA
	HP USB Essential Keyboard and Mouse	H6L29AA
	HP Wireless Collaboration Keyboard	Z9N39AA
	HP 935 Creator Wireless Mouse	1DOK8AA
	HP 635 Multi-Device Wireless Mouse	1DOK2AA
	HP Comfort Grip Wireless Mouse	H2L63AA
	HP X4000b Bluetooth Mouse	H3T50AA
	HP Wired Desktop 320M Mouse	9VA80AA
	HP USB Travel Mouse	G1K28AA
	HP Bluetooth Travel Mouse	6SP30AA
	HP Wireless Premium Mouse	1JR31AA
	HP USB Premium Mouse	1JR32AA
	HP Elite Presenter Mouse	2CE30AA
	HP Stereo 3.5mm Headset	T1A66AA
	HP Stereo USB Headset	T1A67AA
	HP UC Wireless Mono Headset	W3K08AA
	HP UC Wireless Duo Headset	W3K09AA
	HP USB Type-C to USB-A Hub	Z6A00AA
	HP USB Type-C to DP	N9K78AA
	HP USB Type-C to VGA	N9K76AA
	HP HDMI to VGA	H4F02AA
	HP USB Type-C to HDMI 2.0 Adapter	1WC36AA
	HP USB Type-C to RJ45 Adapter	V7W66AA
	HP USB to Gig RJ45 Adapter	N7P47AA

Options and Accessories (sold separately and availability may vary by country)

	HP USB Type-C Travel Hub G2	7PJ38AA
	HP Elite USB Type-C Hub	4WX89AA
Power	HP 65W Slim AC Adapter	H6Y82AA
	HP 45W Smart AC Adapter	H6Y88AA
	HP 65W Smart AC Adapter	H6Y89AA
	HP 45W 2-prong 4.5 mm DC jack AC Adapter	L6F60AA#ABJ
	HP 45W USB-C Power Adapter	1HE07AA
	HP 65W USB-C Power Adapter	1HE08AA
	65W USB Type-C® Slim Power Adapter	3PN48AA
	HP Notebook Power Bank	N9F71AA
	HP USB-C Essential Power Bank	3TB55AA
Storage	HP USB External DVDRW Drive	F2B56AA
	HP 256GB PCI-e 3x4 NVMe M.2 SSD	TBT
	HP 512GB PCI-e 3x4 NVMe M.2 SSD	TBT
Security	HP Nano Keyed Cable Lock	1AJ39AA
	HP Sure Key Cable Lock	6UW42AA

Summary of changes

Date of change:	Version History:		Description of change:
January 29, 2020	V1 to V2	Update	USB Ports
February 4, 2021	V2 to V3	Added	Processors, WPA3 certification
February 8, 2021	V3 to V4	Update	Smart Card Reader
February 10, 2021	V4 to V5	Update	Environmental Data
February 17, 2021	V5 to V6	Update	Processor section
February 24, 2021	V6 to V7	Update	Battery life
March 9, 2021	V7 to V8	Update	Audio and Multimedia section
April 19, 2021	V8 to V9	Updated	Input/ Output Section Updated
April 23, 2021	V9 to V10	Added	BIOS information in Software section
April 29, 2021	V10 to V11	Updated	TPM 2.0
May 4, 2021	V11 to V12	Removed	Processors base frequency/Added HP Smart Support
May 20, 2021	V12 to V13	Removed	HP Thunderbolt Dock 230W G2
May 27, 2021	V13 to V14	Update	HP Pro Security Edition to HP Wolf Pro Security Edition
June 24, 2021	V14 to V15	Added	Sensors, removed HP WorkWell from Software section and updated Memory section
September 2, 2021	V15 to V16	Updated	Techspecs in Processor, Networking and Memory section
November 11, 2021	V16 to V17	Updated	Windows 10 with Free upgrade to Windows 11 when available in OS section and footnote.
November 17, 2021	V17 to V18	Update	Networking Qualcomm® 5G Disclaimers

Copyright © 2021 HP Development Company, L.P. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel®, Core®, and Intel vPro® are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. USB Type-C® and USB-C® are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

Technical Specifications

HP E27d G4 QHD USB-C Docking Monitor*




Front

- | | |
|--------------------|------------------------------------|
| 1. Microphones (2) | 5. IR Lens |
| 2. Camera Light | 6. OSD Buttons |
| 3. RGB Lens | 7. Power Button (With power light) |
| 4. IR Lights | |

Technical Specifications

HP E27d G4 QHD USB-C Docking Monitor*

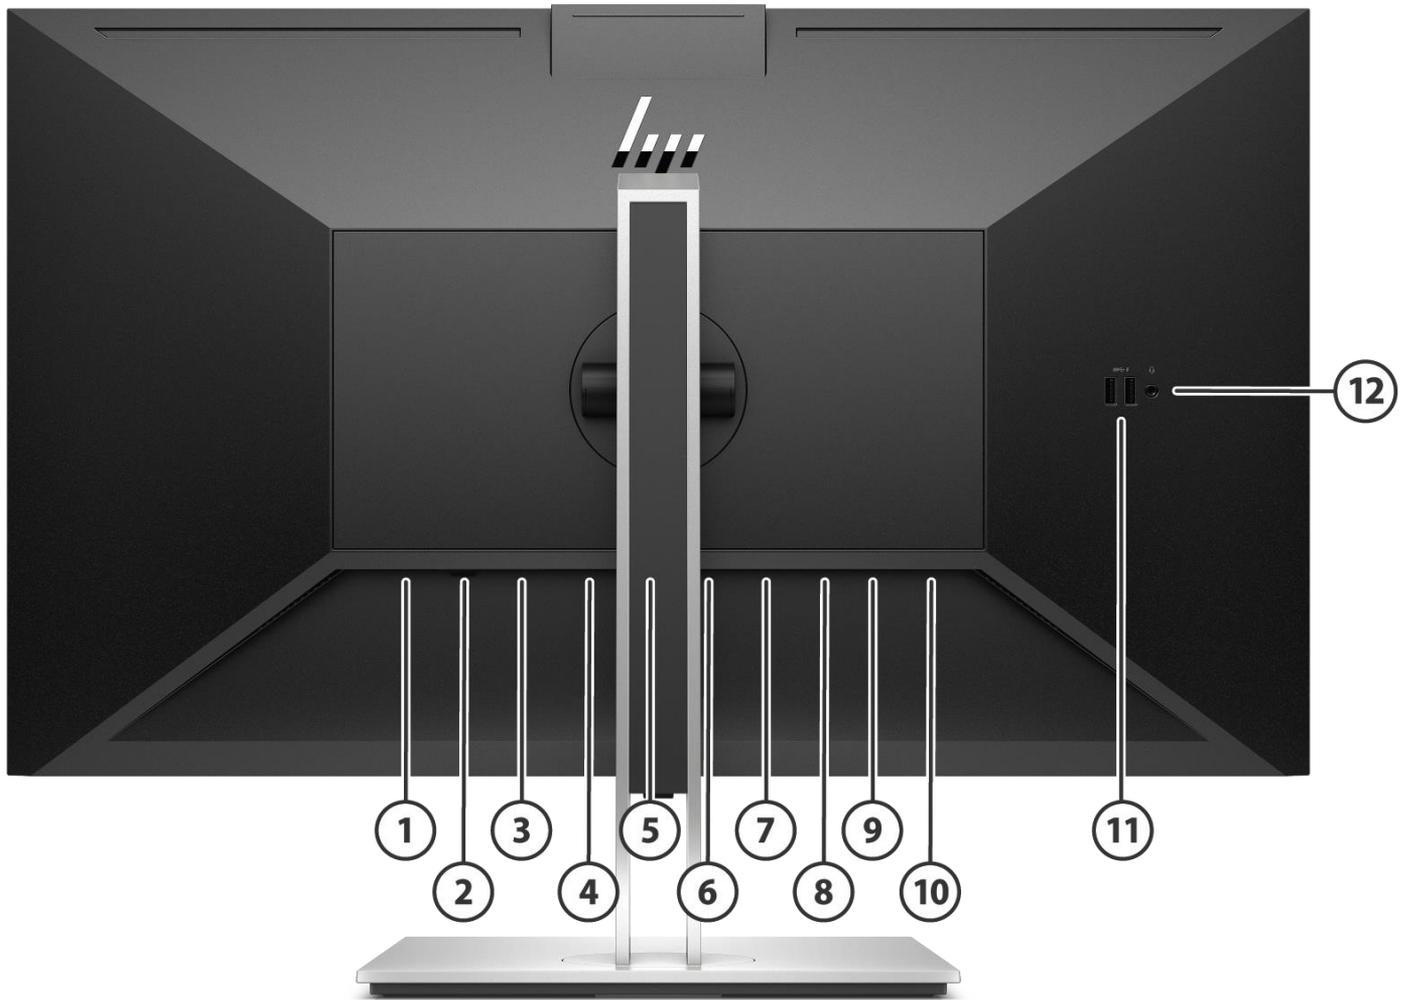

Back

1. Security Cable Slot
2. Master Power Switch
3. Power Connector
4. HDMI Port
5. DisplayPort™ connector
6. USB Type-C™ Port (Connect to Notebook)
7. DisplayPort™ OUT connector
8. USB Type-C™ downstream port
9. RJ-45 (Network) Jack
10. USB SuperSpeed Ports (2)
11. USB SuperSpeed Ports (2)
12. Audio-Out (Headphone)/Audio-in (Microphone) Combo Jack

Technical Specifications

Models: *Product Reference 6PA56AA HP E27D G4 QHD Advanced Docking Monitor was changed by December 2020 to 6PA56A4 HP E27D G4 QHD USB-C Docking Monitor.

Panel Specifications	Display Size (Diagonal)	27-in
	Display Panel Type	IPS
	Micro-Edge Bezel	Yes, 3-sided
	Native Resolution/Timing	2560 x 1440 @60Hz
	Native Resolution	USB Type C™
	Panel Bit Depth	8-bit (16.7million color)
	Aspect Ratio	16:9
	Brightness - Typical	300 cd/m ²
	Static Contrast Ratio - Typical	1000:1
	Static Contrast Ratio - Minimum	700:1
	Dynamic Contrast Ratio (DCR)	5M:1
	Flicker Free	Yes
	Pixel Pitch	0.2331(H) x 0.2331(V)
	Pixels Per Inch (PPI)	109
	Backlight Lamp Life (to half brightness - in hours)	30k minimum
	Anti-Glare Panel	Yes
	Response Time - Typical	5 ms
	Horizontal Viewing Angle (typical CR>10)	178°
	Vertical Viewing Angle (typical CR>10)	178°
	Panel Active Area (w x h)	596.736(H) x 335.664(V) mm
	Preset Graphic Modes/Supported Resolutions	640 x 480 @60Hz 720 x 400 @70Hz 800 x 600 @60Hz 1024 x 768 @60Hz 1280 x 720 @60Hz 1280 x 800 @60 Hz 1280 x 1024@60Hz 1440 x 900 @60Hz 1600 x 900 @60Hz 1680 x 1050 @60Hz 1920 x 1080 @60Hz 2560 x 1080 @60Hz 2560 x 1440 @60Hz
	Maximum Resolution	2560 x 1440 @60Hz
	Recommended Resolution	2560 x 1440 @60Hz
	Vertical Scan Range	48-75 Hz
	Horizontal Scan Range	30-90 kHz
	Default Color Temperature	Neutral (6500K)

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage	sRGB	99% sRGB
-----------------------------	-------------	----------

Technical Specifications

Color Management	Factory Color Presets	Neutral
	Color Space / Subsampling Support	RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2
	Default Color Temperature	Neutral (6500 K)
	Low Blue Light Modes	Yes
	RGB Channel Adjust	Yes, Gain
Monitor Specifications	Exterior Color of Monitor Bezel and Stand	Black
	Plug & Play	Yes
	Tilt	-5° to +20°
	Swivel	+/-30°
	Pivot	+/-90°
	Height Adjustment Range	150 mm
	VESA Mounting	100mm x 100mm
	Security Lock Ready	Yes
	Detachable Base	Yes, ships detached
	Warranty	3-3-0 US/JP/AP/EU 3-3-3 AP/PRC
	Low Blue Light	Yes, HP Eye Ease (TUV Low Blue Light Hardware Solution Certified)* *Product Reference 6PA56AA HP E27d G4 QHD Advanced Docking Monitor is built-in software low blue light, only 6PA56A4 HP E27d G4 QHD USB-C Docking Monitor is built-in HP Eye Ease.
Multimedia	Webcam	Yes, 1080p FHD
	Infra-Red Sensors	Yes, 1
	Windows Hello Compatible	Yes
	Microphone	Yes
On Screen Display (OSD)	On Screen Display User Controls	Brightness+, Color, Image, Input, Power, Menu, Management, Information
	Monitor Control Buttons or Switches	Menu, Minus ("-")/Information, Plus ("+") /Viewing Mode, OK/Next Active Input, Power
	User-Assignable Function Buttons	Yes, 3 (6 Options)
	Languages	10 (German, Dutch, T-Chinese and S-Chinese, English, Spanish, French, Italian, Japanese, Portuguese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.2 in 1 DisplayPort™ 1.2 out
	HDMI	1 HDMI 1.4
	USB Type-C™	1 USB Type C™ upstream (Power delivery up to 100 W) 1 USB Type C™ downstream (Power delivery up to 15 W)
	HDCP support	Yes
	Audio Output	1 Headset / Microphone
	Ethernet	Yes
USB Port Specifications	USB Version	3.0
	USB Hub	Yes
	Downstream Ports	5 Ports

Technical Specifications

	Upstream Ports	1 Port
	Fast Charging USB Ports	4 Ports (Rear, Side) (USB-A)
	Power Output Maximum	Fast Charging: 7.5 W
USB-Type C™ Port Specifications	USB-Type C™ Version	USB 3.1 Gen2 / 10G bps
	USB-Type C™ Hub	Yes
	Downstream USB-Type C™ Ports	1 Port
	Upstream USB-Type C™ Ports	1 Port
	Video Support	USB-C™ Alt mode - DisplayPort™ v1.4 / v1.2
	Power Output	5V/9V/12V/15V/20V, 5A
	Power Output Maximum	Up to 100 W
Special Features	User Presets	Yes
	User Updateable Firmware	Yes
Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption - Maximum	175 W
	Energy Saving/Standby Mode	0.5 W
	Power Consumption - Typical	80 W
	Power cable length	1.9 m
EU Energy Efficiency Class (ERP Lot-5)	On-mode Power Consumption	30 W
	Annual Power Consumption	43 kWh
	Energy Efficiency Class	E
	Visible Screen Size	27" / 68,6 cm Diagonal
Operating Conditions	Operating Temperature - Celsius	5° – 35°C
	Operating Temperature - Fahrenheit	41°C – 95°F
	Non-operating Temperature - Celsius	–20° – 60°C
	Non-operating Temperature - Fahrenheit	–4° - 140°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-operating Humidity	5 – 95%
	Operating Altitude	0 – 5,000 m (16,400 ft.)
Non-operating Altitude	0 – 12,192 m (40,000 ft.)	
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting
	Arsenic-Free Display Glass	Yes
	Low Halogen*	Yes
		GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)
		NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
	Agency Approvals and Certifications	WW certificate CE, CB, KC/KCC/NOM/ISO 9241-307/ EAC/TUV-GS/cTUVus/PSB/CCC/CEL/ISC/VCCI/FCC/BSMI/Vietnam

Technical Specifications

Microsoft WHQL Certification	MEPS/Australian-New Zealand MEPS/WEEE/BIS/CEC/E- Standby/Low Blue Light/CECP/TUV-S/CECP
China Energy Label	Win 10, Win 8, Win 7
SmartWay Transport Partnership - NA only	CEL Grade 1 Yes (NA SKU)

*External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

NOTE: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

		Metric	Imperial
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	61.36 x 21.56 x 52.59cm	24.16 x 8.49 x 20.7 in
	Product Dimensions (Packed) (W x D x H)	69.6 x 27.5 x 46.9 cm	27.4 x 10.83 x 18.46 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	61.36 x 4.85 x 36.6cm	24.16 x 1.91 x 14.41 in
	Base Area Footprint** (w x d mm)	239.9 x 200 mm	9.44 x 7.87 in
	**Base Area Footprint sizes for "6PA56AA HP E27d G4 QHD Advanced Docking Monitor" are: 287.8 x 215.6 (mm) / 11.3 x 8.49 (in)		
	Bezel Measurements	Bottom 21.0 mm (display chin)	Bottom 0.83 in (display chin)
	Product Weight (Unpacked with stand)	8.2 kg	18.08 lb
Product Weight (Packed)	13.3 kg	29.3 lb	
Product Weight (Head Only)	5.5 kg	12.1 lb	
Pallet Information	Pallet Dimensions (L x W x H)	1140 x 730 x 120 mm	44.88 x 28.74 x 4.72 in
	Pallet Total Weight (L x W x H)	40" GQ: 223 kg	40" GQ: 492 lbs
		40" HQ: 276 kg	40" HQ: 609 lbs
	Pallet Layers	GQ: 4	
		HQ: 5	
	Pallet Product per Layer	4	
	Total Products per Pallet	GQ: 16 HQ: 20	
Container Load, 20-Foot	Wood pallet: 256 Slip sheet: 256		
Container Load, 40-Foot	Wood pallet: 512 Slip sheet: 512		
Container Load, 40-Foot HighQ	Wood pallet: 640 Slip sheet: 640		
Software Included	HP Display Assistant		

Technical Specifications

What's in the box?	1 HDMI 2.0	(1.8 m) 5.9 ft
	1 DisplayPort™ (DisplayPort™ 1.2)	(1.8 m) 5.9 ft
	1 USB-C (USB3 Gen2)	(1 m)
	1 Power Cord	(1.9 m) 6.2 ft
	1 QSP	
1 Doc-Kit		
User Guide and Warranty Languages	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.


Summary

Change Log

Change Log			
February 21, 2020	V1 to V2	Updated	Panel and What's in the box sections
September 2, 2020	V2 to V3	Updated	Webcam
March 15, 2021	V3 to V4	Added	Low Blue Light
March 17, 2021	V4 to V5	Update	Energy Efficiency Class
April 1, 2021	V5 to V6	Update	Product Dimension
April 13, 2021	V6 to V7	Update	VESA Mounting Specs
May 27, 2021	V7 to V8	Update	Product Description and Base Area Footprint/ Add HP Blue Light Eye footnote
	V8 to V9		

Technical Specifications

HP E27 G4 FHD Monitor

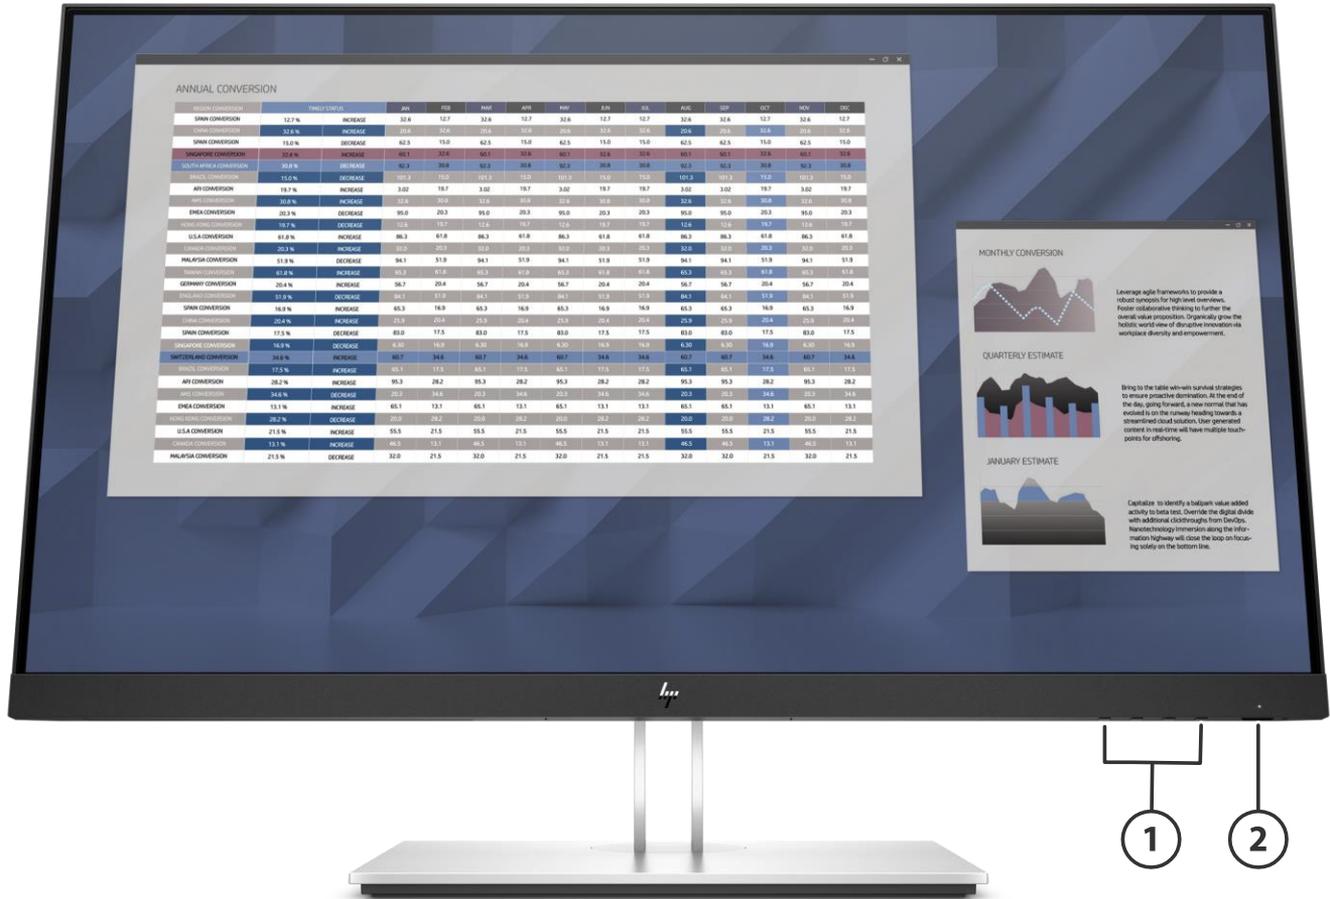


Front

1. OSD Buttons

2. Power Button

Technical Specifications

HP E27 G4 FHD Monitor

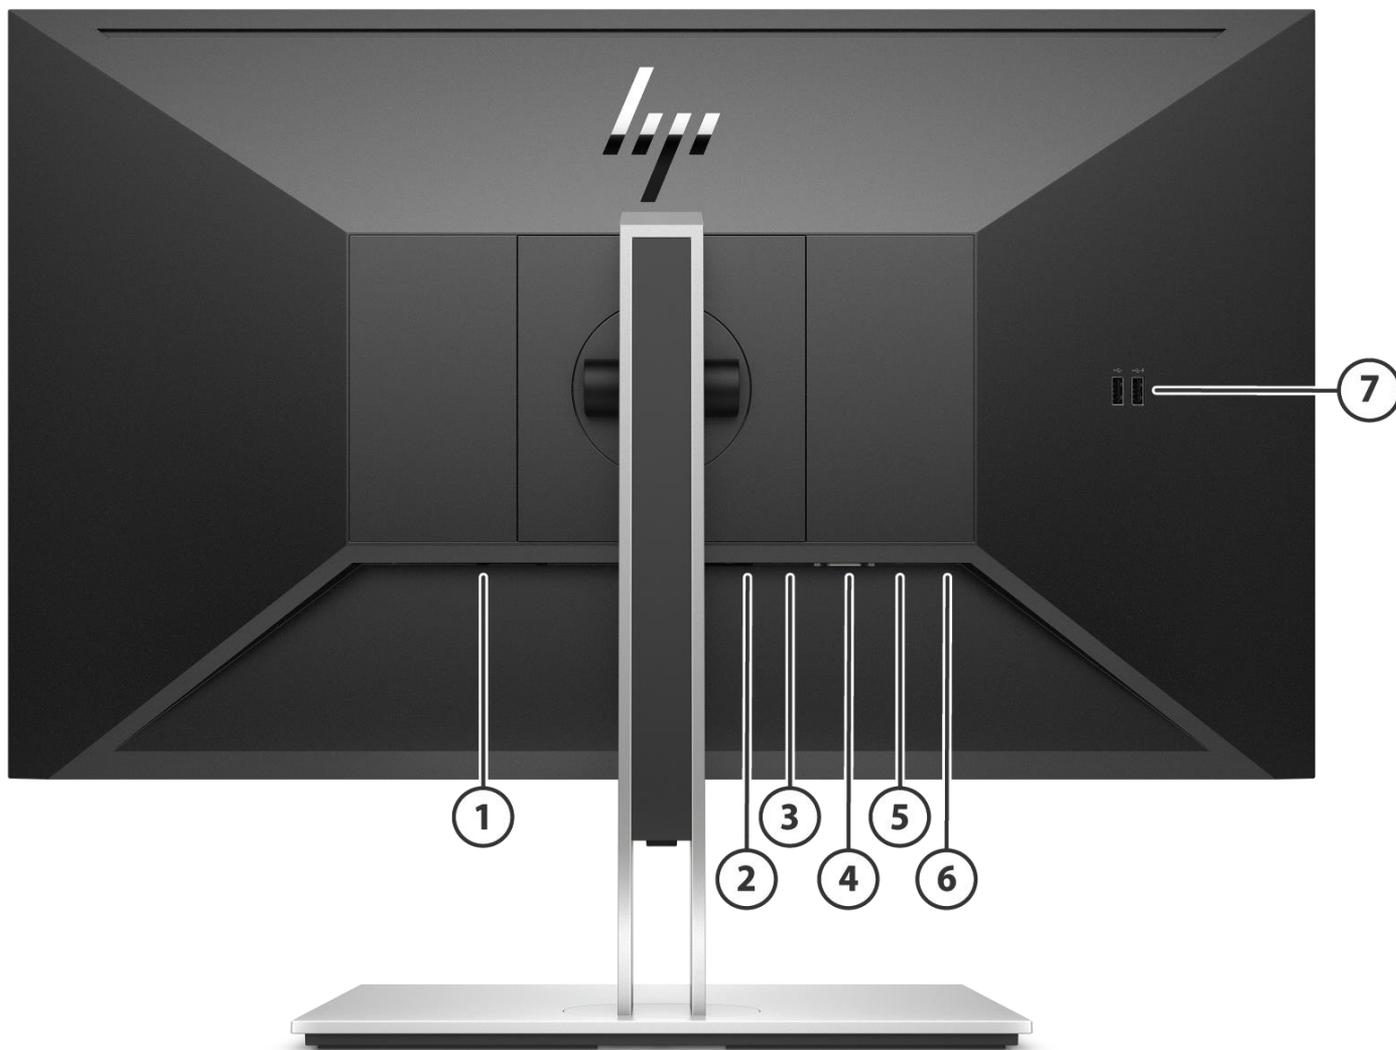

Back

- | | | | |
|----|------------------|----|-----------------|
| 1. | Power Connector | 5. | USB-B Port |
| 2. | DisplayPort™ 1.2 | 6. | USB-A Ports (2) |
| 3. | HDMI 1.4 Port | 7. | USB-A Ports (2) |
| 4. | VGA Port | | |

Technical Specifications

Models: 9VG71AA

Panel Specifications	Display Size (Diagonal)	27-in
	Display Panel Type	IPS
	Micro-Edge Bezel	Yes, 3-sided
	Native Resolution/Timing	1920×1080 @ 60 Hz
	Panel Bit Depth	8bit (6bit + FRC)
	Aspect Ratio	16:9
	Brightness - Typical	250 cd/m ²
	Static Contrast Ratio - Typical	1000:1
	Dynamic Contrast Ratio (DCR)	5,000,000:1
	Flicker Free	Yes
	Pixel Pitch	0.3114(H)mm x 0.3114(V)mm
	Pixels Per Inch (PPI)	82
	Backlight Lamp Life (to half brightness - in hours)	30k minimum
	Anti-Glare Panel	Yes
	Response Time - Typical	5ms GtG (with overdrive)
	Horizontal Viewing Angle (typical CR>10)	178°
	Vertical Viewing Angle (typical CR>10)	178°
	Panel Active Area (w x h)	597.89mm x336.31 mm
	Preset Graphic Modes/Supported Resolutions	640 x 480 @ 60 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz
	Maximum Resolution	1920 x 1080 @ 60 Hz
	Recommended Resolution	1920 x 1080 @ 60 Hz
	Vertical Scan Range	50Hz - 60Hz
	Horizontal Scan Range	30KHz - 80KHz
	Default Color Temperature	Neutral (6500 K)
	Maximum Pixel Clock Speed	170 MHz
	<i>*VGA or DisplayPort™ 1.2 or HDMI 1.4 required to drive panel at its native resolution</i>	

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage	NTSC	72%
-----------------------------	-------------	-----

Technical Specifications

Color Management	Color Space / Subsampling Support	RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2
	Default Color Temperature	Neutral (6500 K)
	Low Blue Light Modes	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	RGB Channel Adjust	Yes, Gain
Monitor Specifications	Exterior Color of Monitor Bezel and Stand	Black head, Silver stand
	Plug & Play	Yes
	Tilt	-5° to +23°
	Swivel	±45°
	Pivot	± 90°
	Height Adjustment Range	150 mm
	VESA Mounting	100mm x 100mm
	Security Lock Ready	Yes
	Detachable Base	Yes
	Warranty	Based on region
On Screen Display (OSD)	On Screen Display User Controls	Brightness+, Color, Image ,Input, Power, Menu, Management, Information, Exit
	User Programmable Modes	Yes, 10
	Monitor Control Buttons or Switches	Menu/OK, Minus ("-")/Brightness, Plus ("+")/Color , Back/Input, Power
	User-Assignable Function Buttons	Yes, 4
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
Connector Types	DisplayPort™	1, DisplayPort™ 1.2
	HDMI	1, HDMI1.4
	VGA	1
	USB-A	4
	USB-B	1
	HDCP support	Yes, (DisplayPort™ and HDMI)
Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption - Maximum	53 W
	Energy Saving/Standby Mode	0.5 W
	Power Consumption - Typical	22 W
	Power cable length	1.9 m
Energy Star Data	Operational Mode at 100 VAC	11.68 W
	Operational Mode at 115 VAC	11.64 W
	Operational Mode at 230 VAC	11.69 W
EU Energy Efficiency Class (ERP lot-5)	On-mode Power Consumption	13 W
	Annual Power Consumption	19 kWh
	Energy Efficiency Class	D

Technical Specifications

Operating Conditions	Operating Temperature - Celsius	5° – 35°C
	Operating Temperature - Fahrenheit	41°C -95°F
	Non-operating Temperature - Celsius	–34° – 60°C
	Non-operating Temperature - Fahrenheit	29° - 140°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-operating Humidity	5 – 95%
	Operating Altitude	0 - 5,000 m (16,400 ft.)
	Non-operating Altitude	0 – 12,192 m (40,000 ft.)
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting
	Arsenic-Free Display Glass	Yes
	Low Halogen**	Yes GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)
	Agency Approvals and Certifications	CE, CB, KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/ EAC/UL/CSA/PSB/ISC/CCC/CEL/Energy Star/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE
	Microsoft WHQL Certification	Win 10, Win 8, Win 7
	ENERGY STAR®	Yes, ENERGY STAR® 8
	EPEAT® Registered*	Yes
	China Energy Label	CEL Grade 1
	TCO Certified	Yes
	SmartWay Transport Partnership - NA only	Yes (NA SKU)

* Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit <http://www.epeat.net> for more information.

**External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Note: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Contains Recycled Plastics 85% recycled content by total weight

Unit Product/Package Specifications		
	Metric	Imperial
Product Dimensions (Unpacked with stand) (W x D x H)	61.17 x 21.60 x 53.52 cm	24.08 x 8.50 x 21.07 in
Product Dimensions (Packed) (W x D x H)	69.5 x 44.40 x 22.5 cm	27.36 x 17.48 x 8.86 in
Display Head Dimensions (Unpacked without stand) (W x D x H)	61.17 x 4.7 x 36.36 cm	24.08 x 1.85 x 14.31 in
Base Area Footprint (w x d mm)	287.97 x 215.97 mm	11.34 x 88.50 in
Bezel Measurements	Bottom 21.38 mm	Bottom 0.84 in
Product Weight (Unpacked with stand)	6.9 kg	15.12 lb

Technical Specifications

	Product Weight (Packed)	10.8 kg	23.81 lb
	Product Weight (Head Only)	4.3 kg	9.57 lb
	Container Load, 40-Foot HighQ	900 units	
Software Included	HP Display Center		
What's in the box?	AC Power Cord (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft, DP Cable (1.8m) 5.9 ft, 1 USB-B to A Cable		
User Guide and Warranty Languages	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.	
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.	

Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

Summary

Change Log

Change Log			
January 3, 2021	V1 to V2		Techspecs Updated
February 28, 2021	V2 to V3		Energy Efficiency Class
April 13, 2021	V3 to V4	Update	VESA Mounting Specs
	V4 to V5		