


Teleport Microcatheter is designed for ultimate torquability, trackability and safety to maximize guidewire support and luminal access in the most complex lesions.

Ultra low profile and pushability for Navigation inside lesions and micro channels

Two available versions for extra penetration (Teleport) and extra torquability (Teleport Control) to accommodate various anatomies via antegrade and retrograde approach

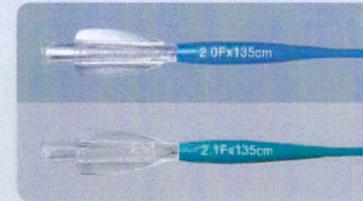

Distal O.D.



2.0F Teleport for extra penetration



2.1F Teleport Control for extra torquability

HYBRACOIL Construction for Guidewire Support and Crossing

Hybrid braiding and coil design provides an optimal balance of trackability, catheter control, kink resistance and flexibility from hub to tip

HYbrid BRAiding and COIL Construction

Hydrophilic coating applied to distal 60 cm section (including tip)


Tapered Tip

Guidewire

- Inner Layer: PTFE Liner
- Middle Layer: Hybrid Braiding and Coil
- Outer Layer: Ultra-thin Polymer Jacket

DURA Tapered Tip for Robustness and Visibility

DURA radiopaque tip is built with exceptional durability and for clear positioning during catheter cannulation inside tight and calcified lesions

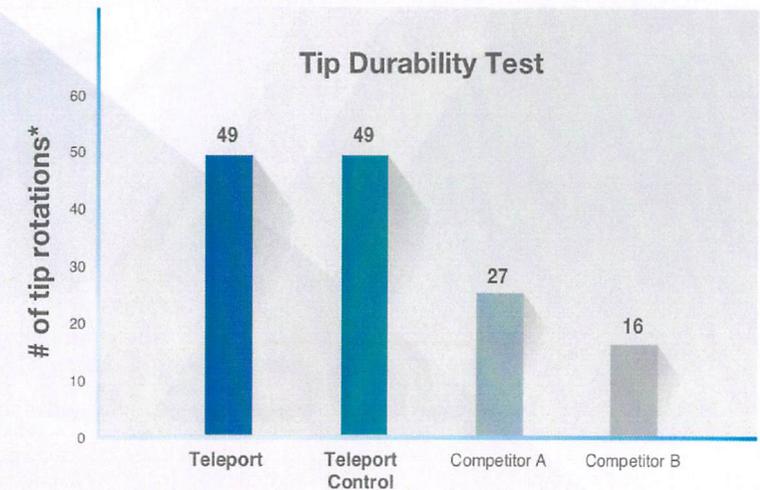

* data on file

Analysis based on number of continuous tip rotations made without failure

Teleport Technical Specifications

DARBINIS ILGIS
/ ANTEGRADISKAI) RETROGRADISKAI


Components	Teleport	Teleport Control
Catheter Working Length	135 cm (antegrade); 150 cm (retrograde)	
Radiopaque Tip Length and Material	6 mm, mixture of Tungsten (75%) and Pebax	
Catheter Exterior Coating	Hydrophilic (60 cm of distal catheter including tip)	
Catheter Inner Lumen Surface	PTFE Liner	
Catheter Inner Lumen ID	0.0180"	0.0180"
Tip Inner Lumen ID	0.0157"	
Tip Entry Profile	0.0190"	
Catheter Inner Body Construction	Hybrid braiding (14 flat wires + 2 round wires) + 1 Coil	
Catheter Outer Jacket	Nylon (proximal) and Pebax (distal)	
Pebax (gradual flexibility towards the distal)	31 cm	32.5 cm
Proximal Shaft OD	2.6F	2.7F
Distal Shaft OD	2.0F	2.1F
Guiding Catheter Compatibility	5F	

HIDROFILINĖ
DANGA

SPINDŽIO DYDIS

VIDINIS DIAMETRAS

Specifications

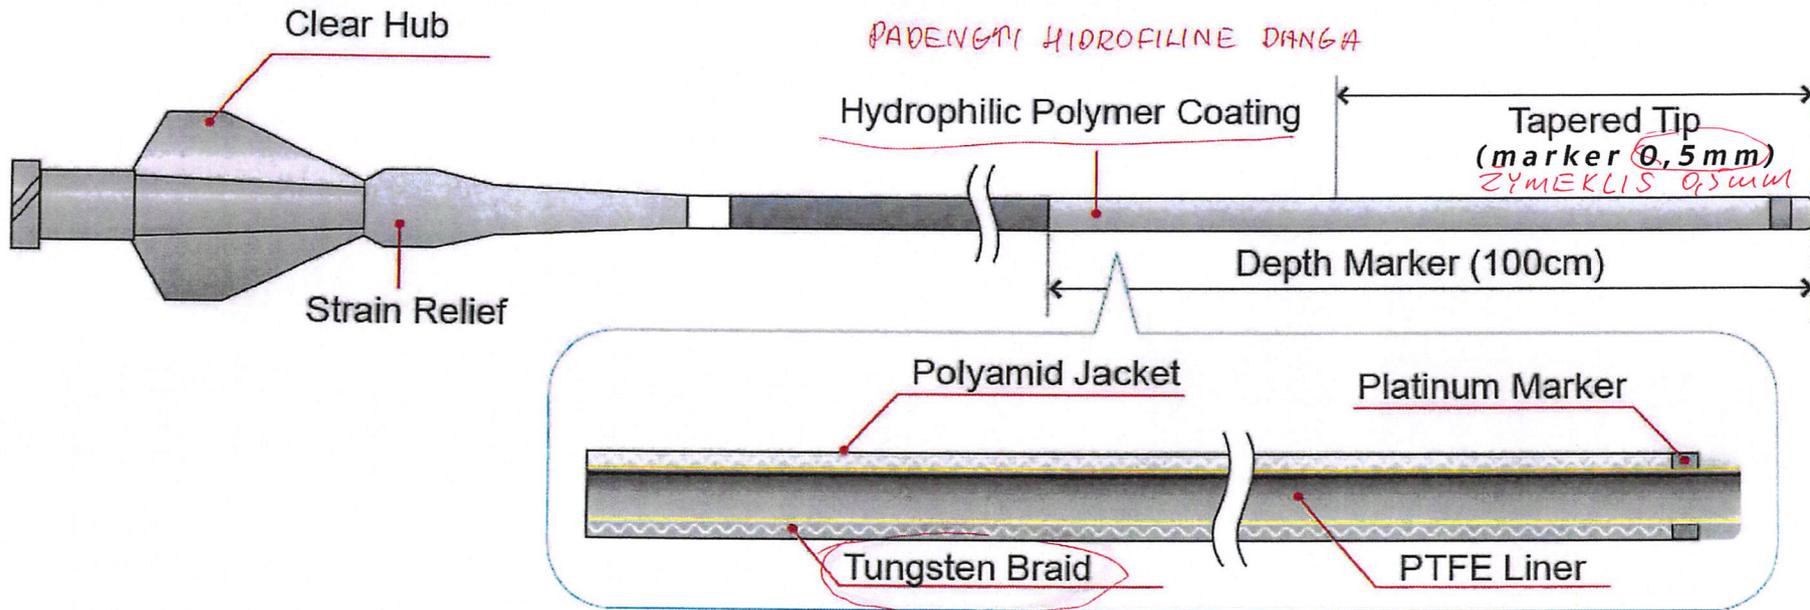


MIKROKATETERIO SIENELĖJE, PLYTAS VOLFRAMO KARKASAS

Maximum Injection Pressure

4140 kPa (600 psi)

ATLAIKO 600 PSI SLĖGI



Specifications

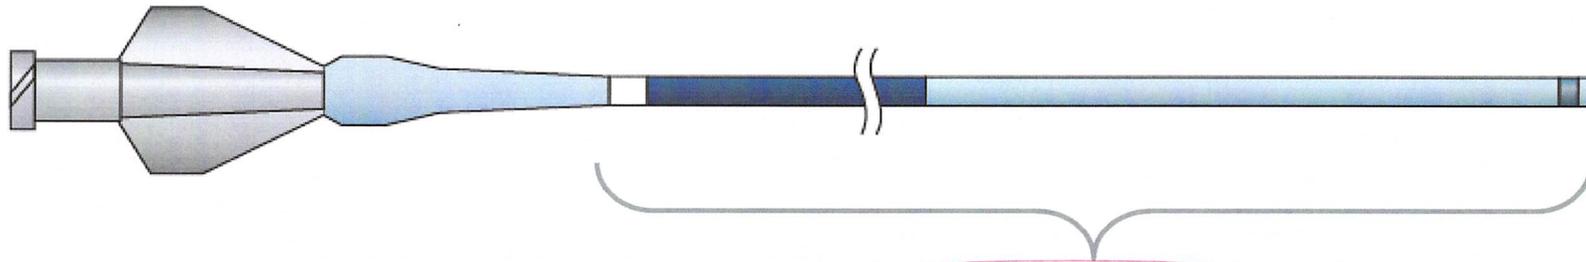

Shaft is composed of 7 to 10 different segments depends on model.

MIKROKATETERIO SIENELĖ IŠ 7-10 SKIRTINGO KIETUMO ZONŲ

Flat Tungsten Braiding

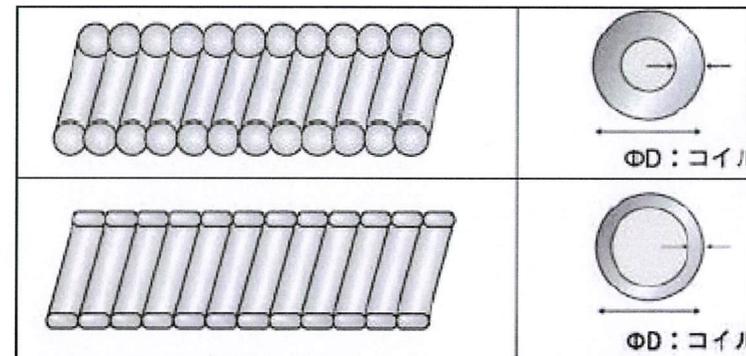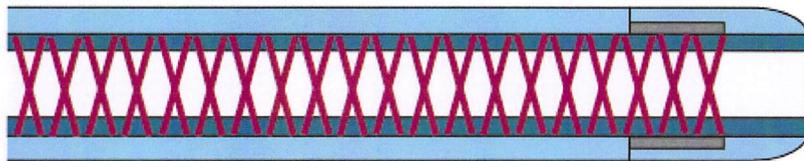

HYBRACOIL Catheter Construction

