



## ENT CHAIRS

Supplied with  
head-rest

27546

Foot switch for up  
and down movementsCHAIRS AVAILABLE  
IN 24 COLOURSTrendelenburg  
position +5°

27550-1

The seat is adjustable  
(42 cm vertical  
excursion)Optional footrest  
on request

27551


Seat base in heavy metal painted in epoxydic  
powders, with support of pantograph arm - 90°  
left and right rotation - lever locking deviceBackrest synchronized  
to the leg-rest move-  
ment can be adjusted  
at 90° and inclined  
until 190°Revol-  
ving and  
removable  
arm-rests in  
light grey  
expanded  
polyurethane

1220 mm

- 27545 OTO/PV ENT CHAIR with head support - colour on request
  - 27546 OTO/PV ENT CHAIR with head support - green Marbella
  - 27547 OTO/PV ENT CHAIR with head support - sky blue Parigi
- Patient chair with Peltex-lined seat and backrest.  
Electric up and down movements by silent engine controlled  
through foot switch.  
Back-rest can be adjusted up to 180° by a gas spring. Chair rotates  
360° and is provided with a rotation locking device placed at the  
bottom. Power: 230 V - 50 Hz (Available 110 V - 60 Hz). Made in Italy.

- 27550 OTOPEX ENT CHAIR with head support - colour on request
  - 27551 OTOPEX ENT CHAIR with head support - blue Chicago
  - 27552 OTOPEX ENT CHAIR with head support - green Vancouver
- ENT chair designed also for ambulatory operations.  
Moved by very silent electrical engines operated by joystick foot-  
control. Also provided with button to re-set to previously selected  
working position. Upholstery made of simulated leather, high  
density undeformable foam padding (50 kg/cm³).  
Seat and leg-rest are joined in a single piece.  
Power: 230 V - 50 Hz (Available 110 V - 60 Hz). Made in Italy.

## ENT CABINETS

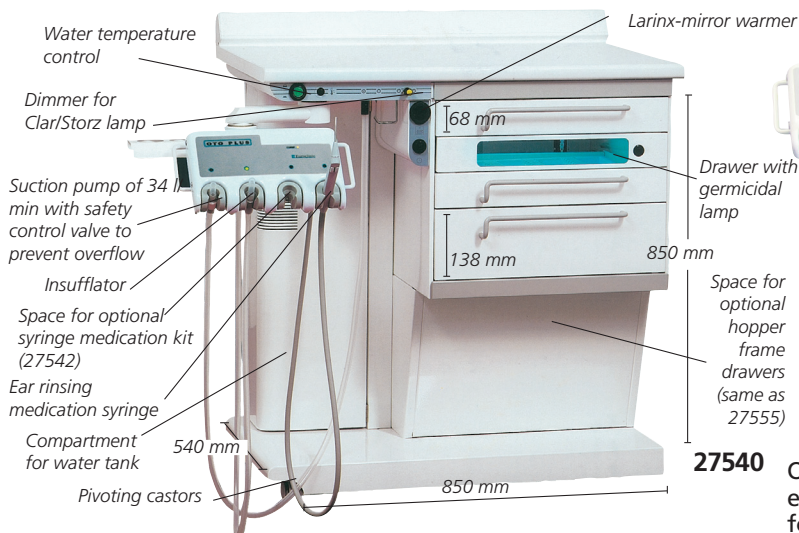

27540


## • 27540 OTOPLUS - ENT UNIT

The E.N.T. unit has rubber pivoting castors, a working surface made of scratch-proof rolled sections, 2 small and one large drawers provided of removable internal partitions, one drawer with inside germicidal lamps to keep instrument sterilization. Otoplus is provided with a silent suction pump of 34 l/min, with power supply complete with dim adjustment device for Clar/Storz lamp, larynx-mirror warmer, twin-cylinder dry compressor for tubal insufflation, 2-litres distilled water tank with acoustic signal for reserve level. The articulated arm with instrument holding tray is complete with terminal suction cannula and terminal insufflation cannula, ear rinsing syringe with automatic water temperature control, (a microprocessor keeps temperature at a constant level of 37 °C). Power 230 V - 50 Hz (Available 110 V - 60 Hz). Made in Italy.

## • 27539 OTOPLUS COMPLETE

Same as code 27540 with included vasister drawers (code 27541) and endoscope support (code 27543).

## • 27554 OTOPLUS DC ENT UNIT

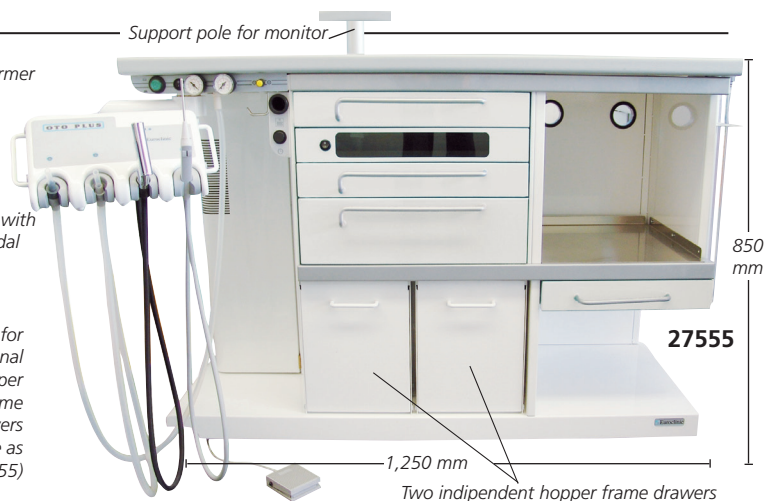

27555

Otoplus unit with additional column, to be used for diagnostic equipment (light source, camera or printer) and a support pole for monitor.

## • 27555 OTOPLUS DC ENT UNIT - complete

Same as code 27554 with included hopper frame drawers (code 27541) and endoscope support (code 27543)

- 27541 HOPPER FRAME DRAWERS - 2 independent drawers
- 27543 ENDOSCOPE SUPPORT - 2 transparent plastic tubes 1 tube 50 cm long and 1 tube 25 cm long both closed at the bottom.

- 27542 SYRINGE MEDICATION KIT composed of 1 syringe, 2 atomizers (1 for liquid and 1 for powder) and 3 ampoules in dark glass. To be ordered with ENT unit.

## • 27544 LED LIGHT SOURCE

Makes cold white light (5500 °K, 180 lumen) for endoscopy use. It can be connected to endoscopes without necessity of F.O. cable.

27544

