




CROSSWAY



CROSSWAY LOW ENTRY CITY ELEC – 12/13 m

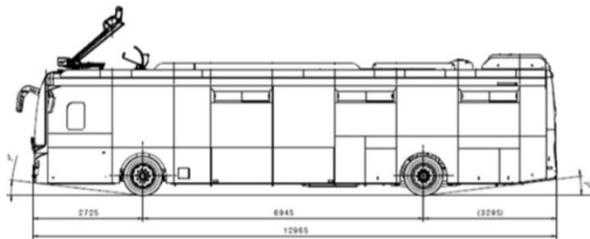

13m - 36 seats + 1 UFR



13m - 40 seats + 1 UFR



LENGTH	12,050 mm	12,950 mm
WIDTH	2,550 mm	
HEIGHT (with pantograph up)	3,432 mm	
WHEELBASE	6,030 mm	6,945 mm
FRONT / REAR OVERHANG	2,725 / 3,295 mm	
FRONT / MIDDLE DOOR ACCESS HEIGHT	320 / 330 mm	
FRONT / MIDDLE DOOR WIDTH (STD)	1,200 mm	
WALL-TO-WALL TURNING RADIUS		
KERB-TO-KERB TURNING RADIUS		
APPROACH / DEPARTURE ANGLES		
GVW CITY (MAX PERMITTED WEIGHT DEPENDS ON LOCAL LEGISLATION)	19,500 kg	
MAX. WEIGHT FRONT / REAR AXLE (CITY)		
Engine		
Voltage Range		
Max Power	240 kW	
Max Current		
Max Torque		
Max 30min Power	210 kW @ 1500 rpm	
Rated Torque		
Rated Current		

IVECO BUS

Your partner for sustainable transport

CROSSWAY LOW ENTRY CITY ELEC – 12/13 m

BODY AND EXTERIOR EQUIPMENT

- .
- .
- .

INTERIOR EQUIPEMENT

- .
- .
- .
- .
- .
- .
- .

ELECTRICAL EQUIPMENT

- .
- .
- .
- .
- .

WINDOWS/ THERMAL COMFORT

- .
- .
- .

DRIVER'S COMPARTMENT

- .
- .
- .
- .
- .
- .
- .

OPTIONAL

- .
- .
- .

OPTIONAL

- .
- .

OPTIONAL

- .
- .

OPTIONAL

- .
- .
- .
- .
- .

OPTIONAL

- .
- .
- .
- .
- .
- .
- .
- .
- .

MOTOR

- Siemens central motor 240 kW

CHARGING

- Overnight charging thru plug CCS c2

BATTERY PACS

- .

REAR AXLE

- .
- .

FRONT AXLE/ STEERING

- .
- .

SUSPENSION

- .
- .
- .

COMPRESSED AIR

- .

BRAKES

- .
- .
- .
- .

TYRES AND WHEELS

- .

OPTIONAL

OPTIONAL

6 packs / 416 kWh

OPTIONAL



Your partner for sustainable transport