


95, 96, 97 posiciones

Radifocus® Guide wire M

Standard type

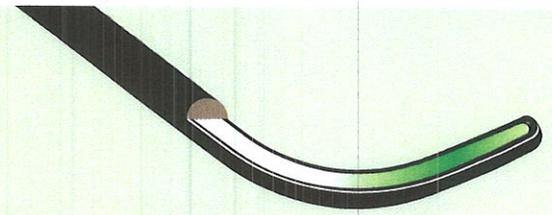

Guide wires

Length < 180 cm

Nitinol hydrophilic guide wires covered with polyurethane and hydrophilic coating for an absolute maneuverability and absence of friction.

- Extra flexible and non traumatic tapered tip
- Extra hydrophilic thanks to the exclusive "M" polymer coating
- Super elastic alloy core in Nitinol
- One-piece construction for a better push and torque transmission

Specifications

Code number	Diameter	Length	Flexible length	Distal curve
RF-GS18153M	0.018" / 0.46 mm	150 cm	30 mm	Straight
RF-GA18153M	0.018" / 0.46 mm	150 cm	30 mm	Angled
RF-GS18183M	0.018" / 0.46 mm	180 cm	30 mm	Straight
RF-GA18183M	0.018" / 0.46 mm	180 cm	30 mm	Angled
RF-GS25123M	0.025" / 0.64 mm	120 cm	30 mm	Straight
RF-GA25123M	0.025" / 0.64 mm	120 cm	30 mm	Angled
RF-GS25153M	0.025" / 0.64 mm	150 cm	30 mm	Straight
RF-GA25153M	0.025" / 0.64 mm	150 cm	30 mm	Angled
RF-GS25183M	0.025" / 0.64 mm	180 cm	30 mm	Straight
RF-GA25183M	0.025" / 0.64 mm	180 cm	30 mm	Angled
RF-GS32123M	0.032" / 0.81 mm	120 cm	30 mm	Straight
RF-GA32123M	0.032" / 0.81 mm	120 cm	30 mm	Angled
RF-GS32153M	0.032" / 0.81 mm	150 cm	30 mm	Straight
RF-GA32153M	0.032" / 0.81 mm	150 cm	30 mm	Angled
RF-GS32183M	0.032" / 0.81 mm	180 cm	30 mm	Straight
RF-GA32183M	0.032" / 0.81 mm	180 cm	30 mm	Angled
RF-GA35053M	0.035" / 0.89 mm	50 cm	30 mm	Angled
RF-GA35083M	0.035" / 0.89 mm	80 cm	30 mm	Angled
RF-GS35123M	0.035" / 0.89 mm	120 cm	30 mm	Straight
RF-GA35123M	0.035" / 0.89 mm	120 cm	30 mm	Angled
RF-GS35151M	0.035" / 0.89 mm	150 cm	10 mm	Straight
RF*GS35153M	0.035" / 0.89 mm	150 cm	30 mm	Straight
RF-GS35155M	0.035" / 0.89 mm	150 cm	50 mm	Straight
RF-GS35158M	0.035" / 0.89 mm	150 cm	80 mm	Straight
RF-GA35151M	0.035" / 0.89 mm	150 cm	10 mm	Angled
RF*GA35153M	0.035" / 0.89 mm	150 cm	30 mm	Angled
RF-GA35155M	0.035" / 0.89 mm	150 cm	50 mm	Angled
RF-GA35158M	0.035" / 0.89 mm	150 cm	80 mm	Angled
RF*GR35183M	0.035" / 0.89 mm	180 cm	30 mm	J Angled (1.5 mm)
RF*GB35153M	0.035" / 0.89 mm	150 cm	30 mm	J Angled (3 mm)
RF-GS35181M	0.035" / 0.89 mm	180 cm	10 mm	Straight
RF-GS35183M	0.035" / 0.89 mm	180 cm	30 mm	Straight
RF-GA35181M	0.035" / 0.89 mm	180 cm	10 mm	Angled
RF*GA35183M	0.035" / 0.89 mm	180 cm	30 mm	Angled
RF*GE35185M	0.035" / 0.89 mm	180 cm	50 mm	Double Angulation (Bolia)
RF*GE35188M	0.035" / 0.89 mm	180 cm	80 mm	Double Angulation (Bolia)
RF-GS38151M	0.038" / 0.97 mm	150 cm	10 mm	Straight
RF-GS38153M	0.038" / 0.97 mm	150 cm	30 mm	Straight
RF-GA38151M	0.038" / 0.97 mm	150 cm	10 mm	Angled
RF*GA38153M	0.038" / 0.97 mm	150 cm	30 mm	Angled
RF-GS38183M	0.038" / 0.97 mm	180 cm	30 mm	Straight
RF-GA38183M	0.038" / 0.97 mm	180 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Units per box: 5