


Radifocus® Guide wire M

Standard type (For catheter exchange)

Guide wires

51,52,55 pirkimo days

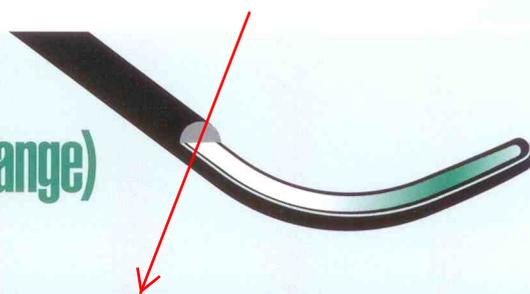

Length > 220 cm

Nitinol hydrophilic guide wires covered with polyurethane and hydrophilic coating for an absolute maneuverability and absence of friction.

- Extra flexible and non traumatic tapered tip
- Extra hydrophilic thanks to the exclusive "M" polymer coating
- Super elastic alloy core in Nitinol
- One-piece construction for a better push and torque transmission

Specifications

Code number	Outer diameter	Length	Flexible length	Distal curve
RF-GA18223M	0.018" / 0.46 mm	220 cm	30 mm	Angled
RF-GA18263M	0.018" / 0.46 mm	260 cm	30 mm	Angled
RF-GS18263M	0.018" / 0.46 mm	260 cm	30 mm	Straight
RF-GS25263M	0.025" / 0.64mm	260 cm	30 mm	Straight
RF-GA25263M	0.025" / 0.64mm	260 cm	30 mm	Angled
RF-GS32263M	0.032" / 0.81 mm	260 cm	30 mm	Straight
RF-GA32263M	0.032" / 0.81 mm	260 cm	30 mm	Angled
RF-GS35223M	0.035" / 0.89 mm	220 cm	30 mm	Straight
RF-GA35223M	0.035" / 0.89 mm	220 cm	30 mm	Angled
RF-GS35261M	0.035" / 0.89 mm	260 cm	10 mm	Straight
RF-GS35263M	0.035" / 0.89 mm	260 cm	30 mm	Straight
RF-GA35261M	0.035" / 0.89 mm	260 cm	10 mm	Angled
RF*GA35263M	0.035" / 0.89 mm	260 cm	30 mm	Angled
RF-GA35303M	0.035" / 0.89 mm	300 cm	30 mm	Angled
RF-GA38223M	0.038" / 0.97 mm	220 cm	30 mm	Angled
RF-GS38263M	0.038" / 0.97 mm	260 cm	30 mm	Straight
RF-GA38263M	0.038" / 0.97 mm	260 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Units per box: 5

Nuoroda internete:

<http://www.terumo-europe.com/en-emea/interventional-cardiology/access-diagnostic-products/guidewire/radifocus%C2%AE-guidewire-m-standard-type-guidewire>