

02 C € 0082      **ction Manual**  
 00                      **PROTEK<sup>®</sup>**  
                          **Safety Harness**  
                          **P-60/60E**

02 C € 0082  
00 Ref. AB 160 01 - P-60  
00 Ref. AB 160 02 - P-60E

ss is basic of fall arrest equipment and complies with EN 358.

**ON** thickness P60 is made of pieces of polyamide webbing worn and connected by metal buckles.

## JIPMENT

- climbing buckle - for attaching fall arrest system;
- climbing loops - for attaching fall arrest system;
- connecting and adjusting buckles - for comfort wearing and  
arrest;
- conditioning belt;

P-60 is manufactured in two sizes:  
1-XL  
XXL

## LE TIME OF USE

ss can be used for 5 years counting from a date of  
harness into operation. After this period the harness must  
from use to carry out manufacturer's detailed


Manufacturer's inspection can be carried out by:



- a competent person recommended by manufacturer
- a competent person recommended by manufacturer.

Inspection will be established admissible time of harness manufacturer's inspection.

Inspection must be withdrawn from use immediately and destroyed when used to arrest a fall.

### T OF HARNESS IDENTITY LABEL

the device	<b>P-60</b>
the device	<b>SAFETY HARNESS</b>
the	Ref. AB 160 01
Size:	<input type="checkbox"/> M-XL <input type="checkbox"/> XXL
the device manufacture	Date of manufacture: 03/2003
manufacturing series	Serial number: 0000001
of the European standards conform	EN 361:2002 EN 358:2000
number of a rolled body packing of the equipment (art. II)	<b>C € 0082</b>
the manual	
manufacturer	<b>PROTEKT®</b>

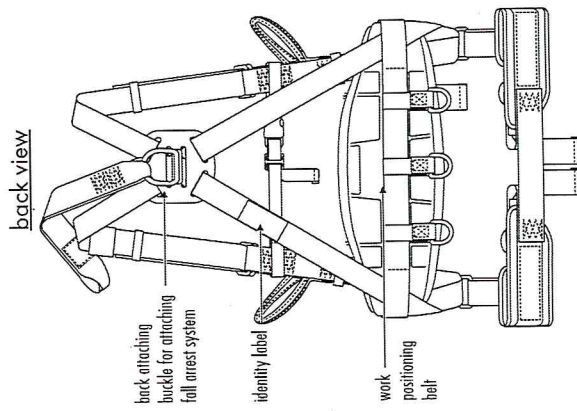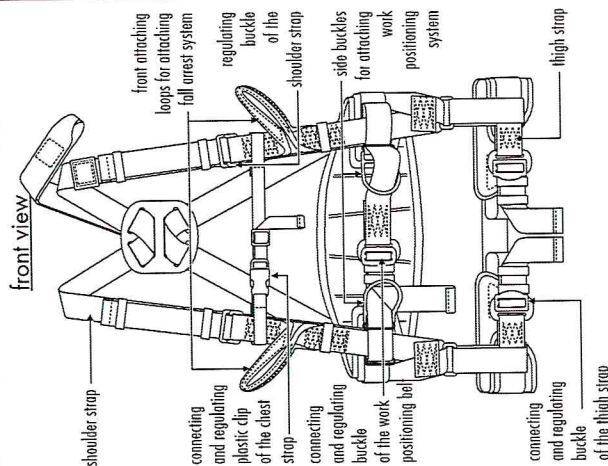

 **Instruction Manual**  
READ CAREFULLY BEFORE USE  
THE EQUIPMENT



**PROTEK**  
WORK  
POSITIONING  
DEVICE  
**PROT-11**

CEN 0082

The work positioning device PROT-11 is the component of the personal protective equipment for work positioning and prevention of falls from a height. It complies with EN 358.


The device PROT-11 complies with EN 358.

## BASIC EQUIPMENT

**BASIC EQUIPMENT**

- polyamide kernmantle rope of diameter  $\varnothing 12$  mm (length of the rope from 1 m to 20 m)
- steel adjuster of the rope length.
- rope protecting tube.

**ATTENTION!** The work positioning device PROT-11 can be equipped only with certified (according to EN 362) snap hooks.

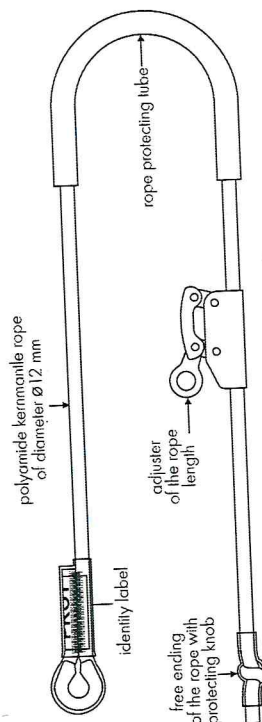


Using the work positioning device PROT-2 in connection with connectors must be compatible with their instructions and obligatory standard EN 362.

## ADMISSIBLE TIME OF USE

**ADMISSIBLE TIME OF USE**  
Work positioning device can be used for 5 years. After this period the device must be withdrawn from use to carry out manufacturer's detailed inspection by:

- manufacturer
  - or person recommended by manufacturer
  - or company recommended by manufacturer.
- During this inspection the rope will be changed and will be established admissible time of device use till next manufacturer's inspection.

**CONTENT OF THE DEVICE IDENTITY LABEL**

<b>PROT-11</b> WORK POSITIONING DEVICE A F 1 0 1 x LENGTH: x.x m	Serial number: 00003	Date of manufacture: 02/2001	CE 0082		EN 358:2000
	monthly/year of the device manufacture (€ marking and number of a notified body controlling manufacturing of the equipment (art. 11) caution: read the manual	number / year of the European standard the equipment conform notation of the manufacturer or distributor	name of the device type of the device reference number of the device *	*) xx - code of length for example: xx=02 - length 2 m xx=10 - length 10 m	