


Dräger C-C440 Communication unit

Control unit with large Push-to-Talk button for easy handling of the radio transmitter. Tough and robust design according to IP67 / MIL-STD-810G standards. Specially designed for deployments using chemical protective suits. ATEX versions available.

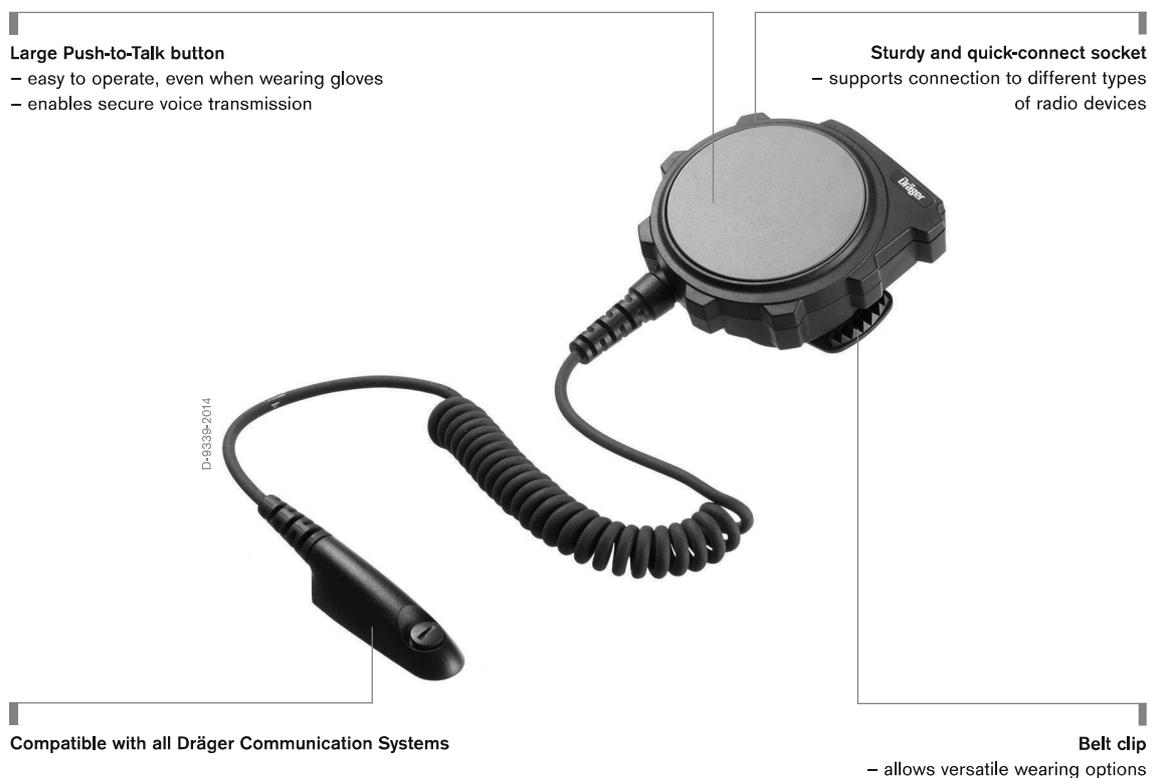

Benefits

Push-to-Talk button

The large pressure area enables secure voice transmission in any situation, even when the C-C440 is operated via the equipment or worn under protective clothing.

Sturdy connection socket

As a sturdy and robust quick-connect socket, the C-C440 can be combined with any of the upper units allowing connection to different types of radio devices.

Robust and water-repellant

The C-C440 has been designed to be particularly sturdy and robust for many different applications as well as being watertight, complying with IP67 / MIL-STD-810G requirements.

ATEX approved

Should the system need to be used in environments where there is a potential explosion hazard, the C-C440 is designed in such a way that it meets ATEX requirements and has ATEX approval.

System Components



Dräger FPS®-COM 5000

Because there is no time for misunderstandings in an emergency: The Dräger FPS®-COM 5000 communication unit has been specifically developed for the full-face mask Dräger FPS® 7000 and ensures clear communication through a voice amplifier unit or radio device – even under extreme conditions.

System Components



D-28805-2015

Dräger FPS®-COM 7000

The Dräger FPS®-COM 7000 provides hands-free communication for all wearers of respiratory protection devices during a mission. Excellent voice quality is achieved by removing interfering noises.



D-31794-2015

Dräger MS-COM

The Dräger MS-COM, alternatively with swan neck microphone or with microphone positioned under the cap, can be combined with the C-C440 via stereo jack and adapted to radio units.



ST-5785-2004

Dräger HC-COM

Clear, reliable, hands-free communication – even when wearing a helmet and breathing gear. The audio/speech headsets in the Dräger HC-COM series can be incorporated into a wide range of systems to increase safety and improve work efficiency.

Technical Data

Weight	140 g (without cable connection)
Size	66 mm (diameter PTT button)
Cable	4 pole Nexus PUR, flame-resistant: ø 4 mm / 270 mm, spiral
Operating temperature	-40 °C to + 85 °C
Protection class	IP67, MIL 810G
Intrinsic safety	depending on radio

Ordering Information

Dräger C-C440	depending on radio
---------------	--------------------

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS
Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

REGION DACH
Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION EUROPE
Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION MIDDLE EAST, AFRICA
Dräger Safety AG & Co. KGaA
Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
Tel +971 4 4294 600
Fax +971 4 4294 699
contactuae@draeger.com

REGION ASIA PACIFIC
Dräger Singapore Pte. Ltd.
25 International Business Park
#04-20/21 German Centre
Singapore 609916
Tel +65 6308 9400
Fax +65 6308 9401
asia.pacific@draeger.com

**REGION CENTRAL
AND SOUTH AMERICA**
Dräger Panama S. de R.L.
59 East Street, Nuevo Paitilla,
House 30, San Francisco Town
Panama City, Panama
Tel +507 377 9100
Fax +507 377 9130
servicioalcliente@draeger.com

Locate your Regional Sales
Representative at:
www.draeger.com/contact



„Dräger C-C440“ ryšio įrenginys

Valdymo blokas su dideliu „Push-to-Talk“ (*spausk ir kalbėk*) mygtuku, leidžiančiu lengvai valdyti radijo siųstuvą. Tvirta ir patvari konstrukcija, atitinkanti IP67 / MIL-STD-810G standartus. Specialiai sukurta naudoti su apsauginiais kostiumais nuo chemikalų. Galimos ATEX versijos.

Didelis „Push-To-Talk“ mygtukas

- lengvai valdomas, net ir su pirštinėmis
- užtikrina saugų balso perdavimą

Tvirtas ir greitai prijungiamas lizdas

- palaiko ryšį su įvairių tipų radijo prietaisais

D-9839-2014

Suderinamas su visomis „Dräger“ ryšio sistemomis

Diržo fiksatorius

- leidžia universalias dėvėjimo parinktis

Privalumai

„Push-To-Talk“ (spausk ir kalbėk) mygtukas

Didelis slėgio plotas užtikrina saugų balso perdavimą bet kokiomis aplinkybėmis, netgi kai C-C440 yra valdomas per įrangą arba nešiojamas po apsauginiais drabužiais.

Tvirtas prijungimo lizdas

C-C440 yra tvirtas ir patvarus greito prijungimo lizdas, kurį galima derinti su bet kuriuo iš viršutinių įrenginių, leidžiančių prijungti įvairių tipų radijo prietaisus.

Patikimas ir atsparus vandeniui

C-C440 buvo suprojektuotas taip, kad būtų ypač tvirtas ir patvarus daugeliui skirtingų pritaikymų, taip pat būtų atsparus vandeniui ir atitiktų IP67 / MIL-STD-810G reikalavimus.

Patvirtintas ATEX

Jei sistemą reikia naudoti aplinkoje, kurioje kyla potencialus sprogo pavojus, C-C440 suprojektuotas taip, kad atitiktų ATEX reikalavimus ir būtų patvirtintas ATEX.

<...>

Techniniai duomenys

Svoris	140 g (be laido jungties)
Dydis	66 mm (PTT mygtuko skersmuo)
Laidas	4 polių „Nexus“ PUR, atsparus ugniai: \varnothing 4 mm / 270 mm, spiralinis
Darbinė temperatūra	nuo -40 °C iki + 85 °C
Apsaugos klasė	IP67, MIL 810G
Savoji sauga	priklausomai nuo radijo

Užsakymo informacija

„Dräger C-C440“	priklausomai nuo radijo
-----------------	-------------------------

<...>

Lietuvos Respublikos Baudžiamojo kodekso 235 str. turinys
dėl baudžiamosios atsakomybės man žinomas
Dokumentą išvertė UAB „Klaipėdos vertimai“
vertėja [redacted]
Vertimas visiškai atitinka originalą

.....
UAB „Klaipėdos vertimai“, įmonės kodas 186235413,
Daukanto g. 4-16, Klaipėda, Lietuva
Tel. +37061028435,
El. paštas info@klaipedosvertimai.lt
www.klaipedosvertimai.lt

