



3. Apskritimo formos saga išgaubta vidine dalimi, su dviem kiaurymėmis siūliui arba juostai praveriti;

2. Sagoje dvi skylės;

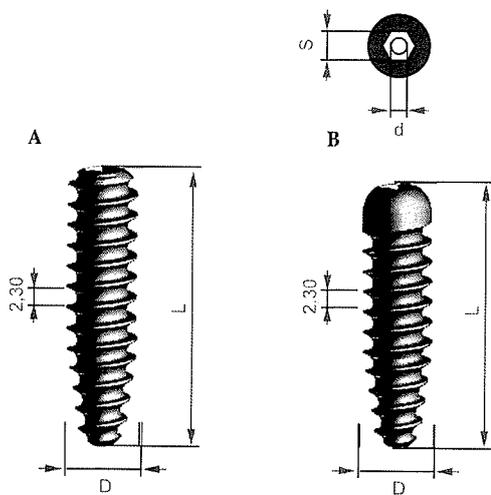

**WKREŢ KOLANOWY INTERFERENCYJNY
INTERFERENCE KNEE SCREW**

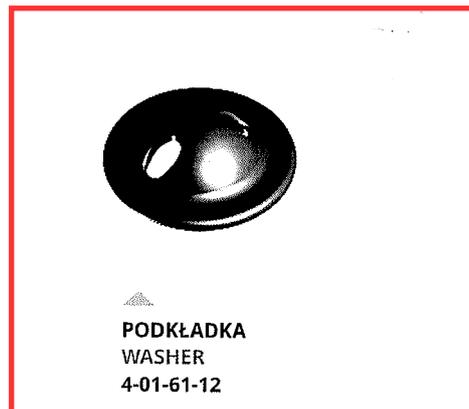

**PODKŁADKA
WASHER
4-01-61-12**




**PLYTKA ENDOBUTTON
ENDOBUTTON PLATE
4 x 12
4-01-61-11**

D (mm)	L (mm)	Ø drutu prowadzącego d (mm)	S (mm)	TWARDE / HARD		MIĘKIE / SOFT	
				A	B	A	B
6	20	1,2	2,5	X-01-61-01/20	X-01-64-01/20	X-01-62-01/20	X-01-63-01/20
6	25	1,2	2,5	X-01-61-01/25	X-01-64-01/25	X-01-62-01/25	X-01-63-01/25
6	30	1,2	2,5	X-01-61-01/30	X-01-64-01/30	X-01-62-01/30	X-01-63-01/30
6	35	1,2	2,5	X-01-61-01/35	X-01-64-01/35	X-01-62-01/35	X-01-63-01/35
6	40	1,2	2,5	X-01-61-01/40	X-01-64-01/40	X-01-62-01/40	X-01-63-01/40
6	45	1,2	2,5	X-01-61-01/45	X-01-64-01/45	X-01-62-01/45	X-01-63-01/45
6	50	1,2	2,5	X-01-61-01/50	X-01-64-01/50	X-01-62-01/50	X-01-63-01/50
7	20	2,0	3,5	X-01-61-02/20	X-01-64-02/20	X-01-62-02/20	X-01-63-02/20
7	25	2,0	3,5	X-01-61-02/25	X-01-64-02/25	X-01-62-02/25	X-01-63-02/25
7	30	2,0	3,5	X-01-61-02/30	X-01-64-02/30	X-01-62-02/30	X-01-63-02/30
7	35	2,0	3,5	X-01-61-02/35	X-01-64-02/35	X-01-62-02/35	X-01-63-02/35
7	40	2,0	3,5	X-01-61-02/40	X-01-64-02/40	X-01-62-02/40	X-01-63-02/40
7	45	2,0	3,5	X-01-61-02/45	X-01-64-02/45	X-01-62-02/45	X-01-63-02/45
7	50	2,0	3,5	X-01-61-02/50	X-01-64-02/50	X-01-62-02/50	X-01-63-02/50
8	20	2,0	3,5	X-01-61-03/20	X-01-64-03/20	X-01-62-03/20	X-01-63-03/20
8	25	2,0	3,5	X-01-61-03/25	X-01-64-03/25	X-01-62-03/25	X-01-63-03/25
8	30	2,0	3,5	X-01-61-03/30	X-01-64-03/30	X-01-62-03/30	X-01-63-03/30
8	35	2,0	3,5	X-01-61-03/35	X-01-64-03/35	X-01-62-03/35	X-01-63-03/35
8	40	2,0	3,5	X-01-61-03/40	X-01-64-03/40	X-01-62-03/40	X-01-63-03/40
8	45	2,0	3,5	X-01-61-03/45	X-01-64-03/45	X-01-62-03/45	X-01-63-03/45
8	50	2,0	3,5	X-01-61-03/50	X-01-64-03/50	X-01-62-03/50	X-01-63-03/50
9	20	2,0	3,5	X-01-61-04/20	X-01-64-04/20	X-01-62-04/20	X-01-63-04/20
9	25	2,0	3,5	X-01-61-04/25	X-01-64-04/25	X-01-62-04/25	X-01-63-04/25
9	30	2,0	3,5	X-01-61-04/30	X-01-64-04/30	X-01-62-04/30	X-01-63-04/30
9	35	2,0	3,5	X-01-61-04/35	X-01-64-04/35	X-01-62-04/35	X-01-63-04/35
9	40	2,0	3,5	X-01-61-04/40	X-01-64-04/40	X-01-62-04/40	X-01-63-04/40
9	45	2,0	3,5	X-01-61-04/45	X-01-64-04/45	X-01-62-04/45	X-01-63-04/45
9	50	2,0	3,5	X-01-61-04/50	X-01-64-04/50	X-01-62-04/50	X-01-63-04/50
10	20	2,0	3,5	X-01-61-05/20	X-01-64-05/20	X-01-62-05/20	X-01-63-05/20
10	25	2,0	3,5	X-01-61-05/25	X-01-64-05/25	X-01-62-05/25	X-01-63-05/25
10	30	2,0	3,5	X-01-61-05/30	X-01-64-05/30	X-01-62-05/30	X-01-63-05/30
10	35	2,0	3,5	X-01-61-05/35	X-01-64-05/35	X-01-62-05/35	X-01-63-05/35
10	40	2,0	3,5	X-01-61-05/40	X-01-64-05/40	X-01-62-05/40	X-01-63-05/40
10	45	2,0	3,5	X-01-61-05/45	X-01-64-05/45	X-01-62-05/45	X-01-63-05/45
10	50	2,0	3,5	X-01-61-05/50	X-01-64-05/50	X-01-62-05/50	X-01-63-05/50

3. Apskritimo formos saga išgaubta vidine dalimi, su dviem kiaurymėmis siūlui arba juostai praverti;

2. Sagoje dvi skylės;



WASHER
1-01-61-12

4. Endo sagos matmenys:
4.1. skersmuo 10 mm.
4.2. aukštis 3,5 mm;
kiaurymės skersmuo 2,5 mm.

Skersmuo	Aukštis	Kiaurymės skersmuo
Width (L)	Height (H)	Hole Ø
10 mm	3,5 mm	2,5 mm

