



NOTICE: PROPRIETARY INFORMATION

THIS DOCUMENT AND THE INFORMATION DISCLOSED HEREIN IS CONFIDENTIAL AND PROPRIETARY TO BROOKS AUTOMATION, INC. IT MAY NOT BE REPRODUCED IN WHOLE OR IN PART; OR DISCLOSED TO ANY THIRD PARTY, OR USED WITHOUT THE PRIOR WRITTEN CONSENT OF BROOKS AUTOMATION, INC. © 2013

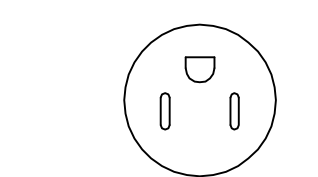




MALE
END

POWER CORD
125 VOLT



MALE
END

POWER CORD
250 VOLT

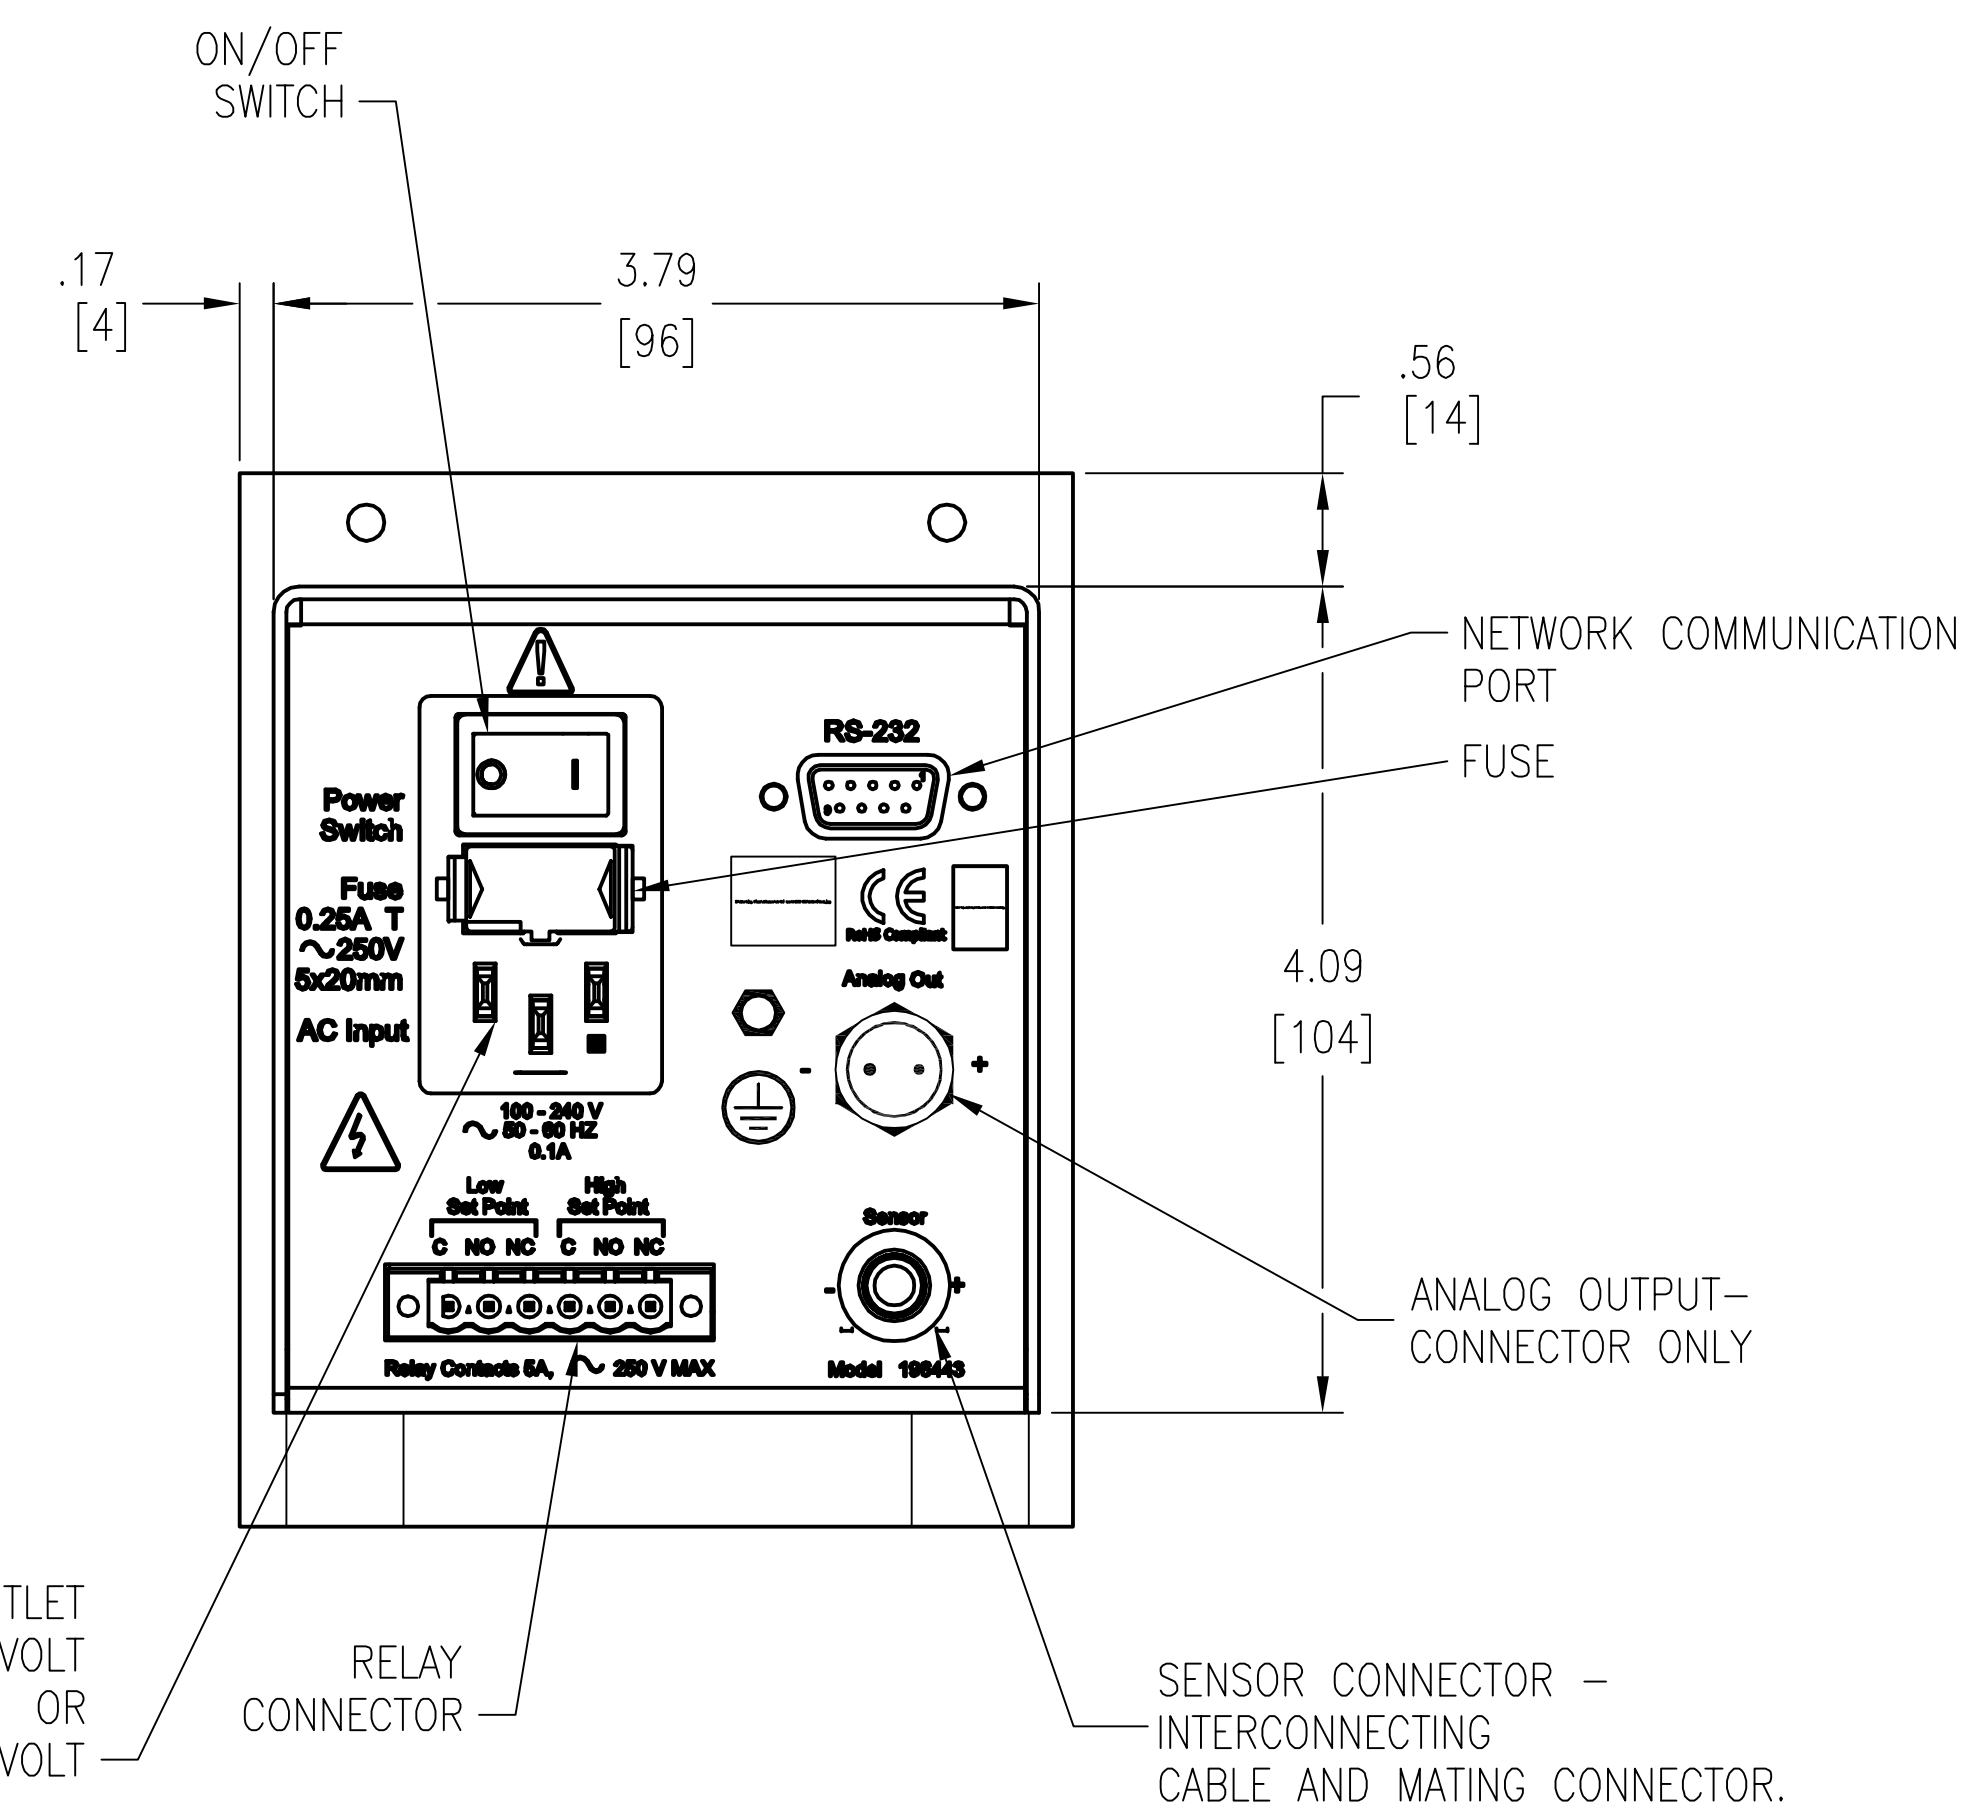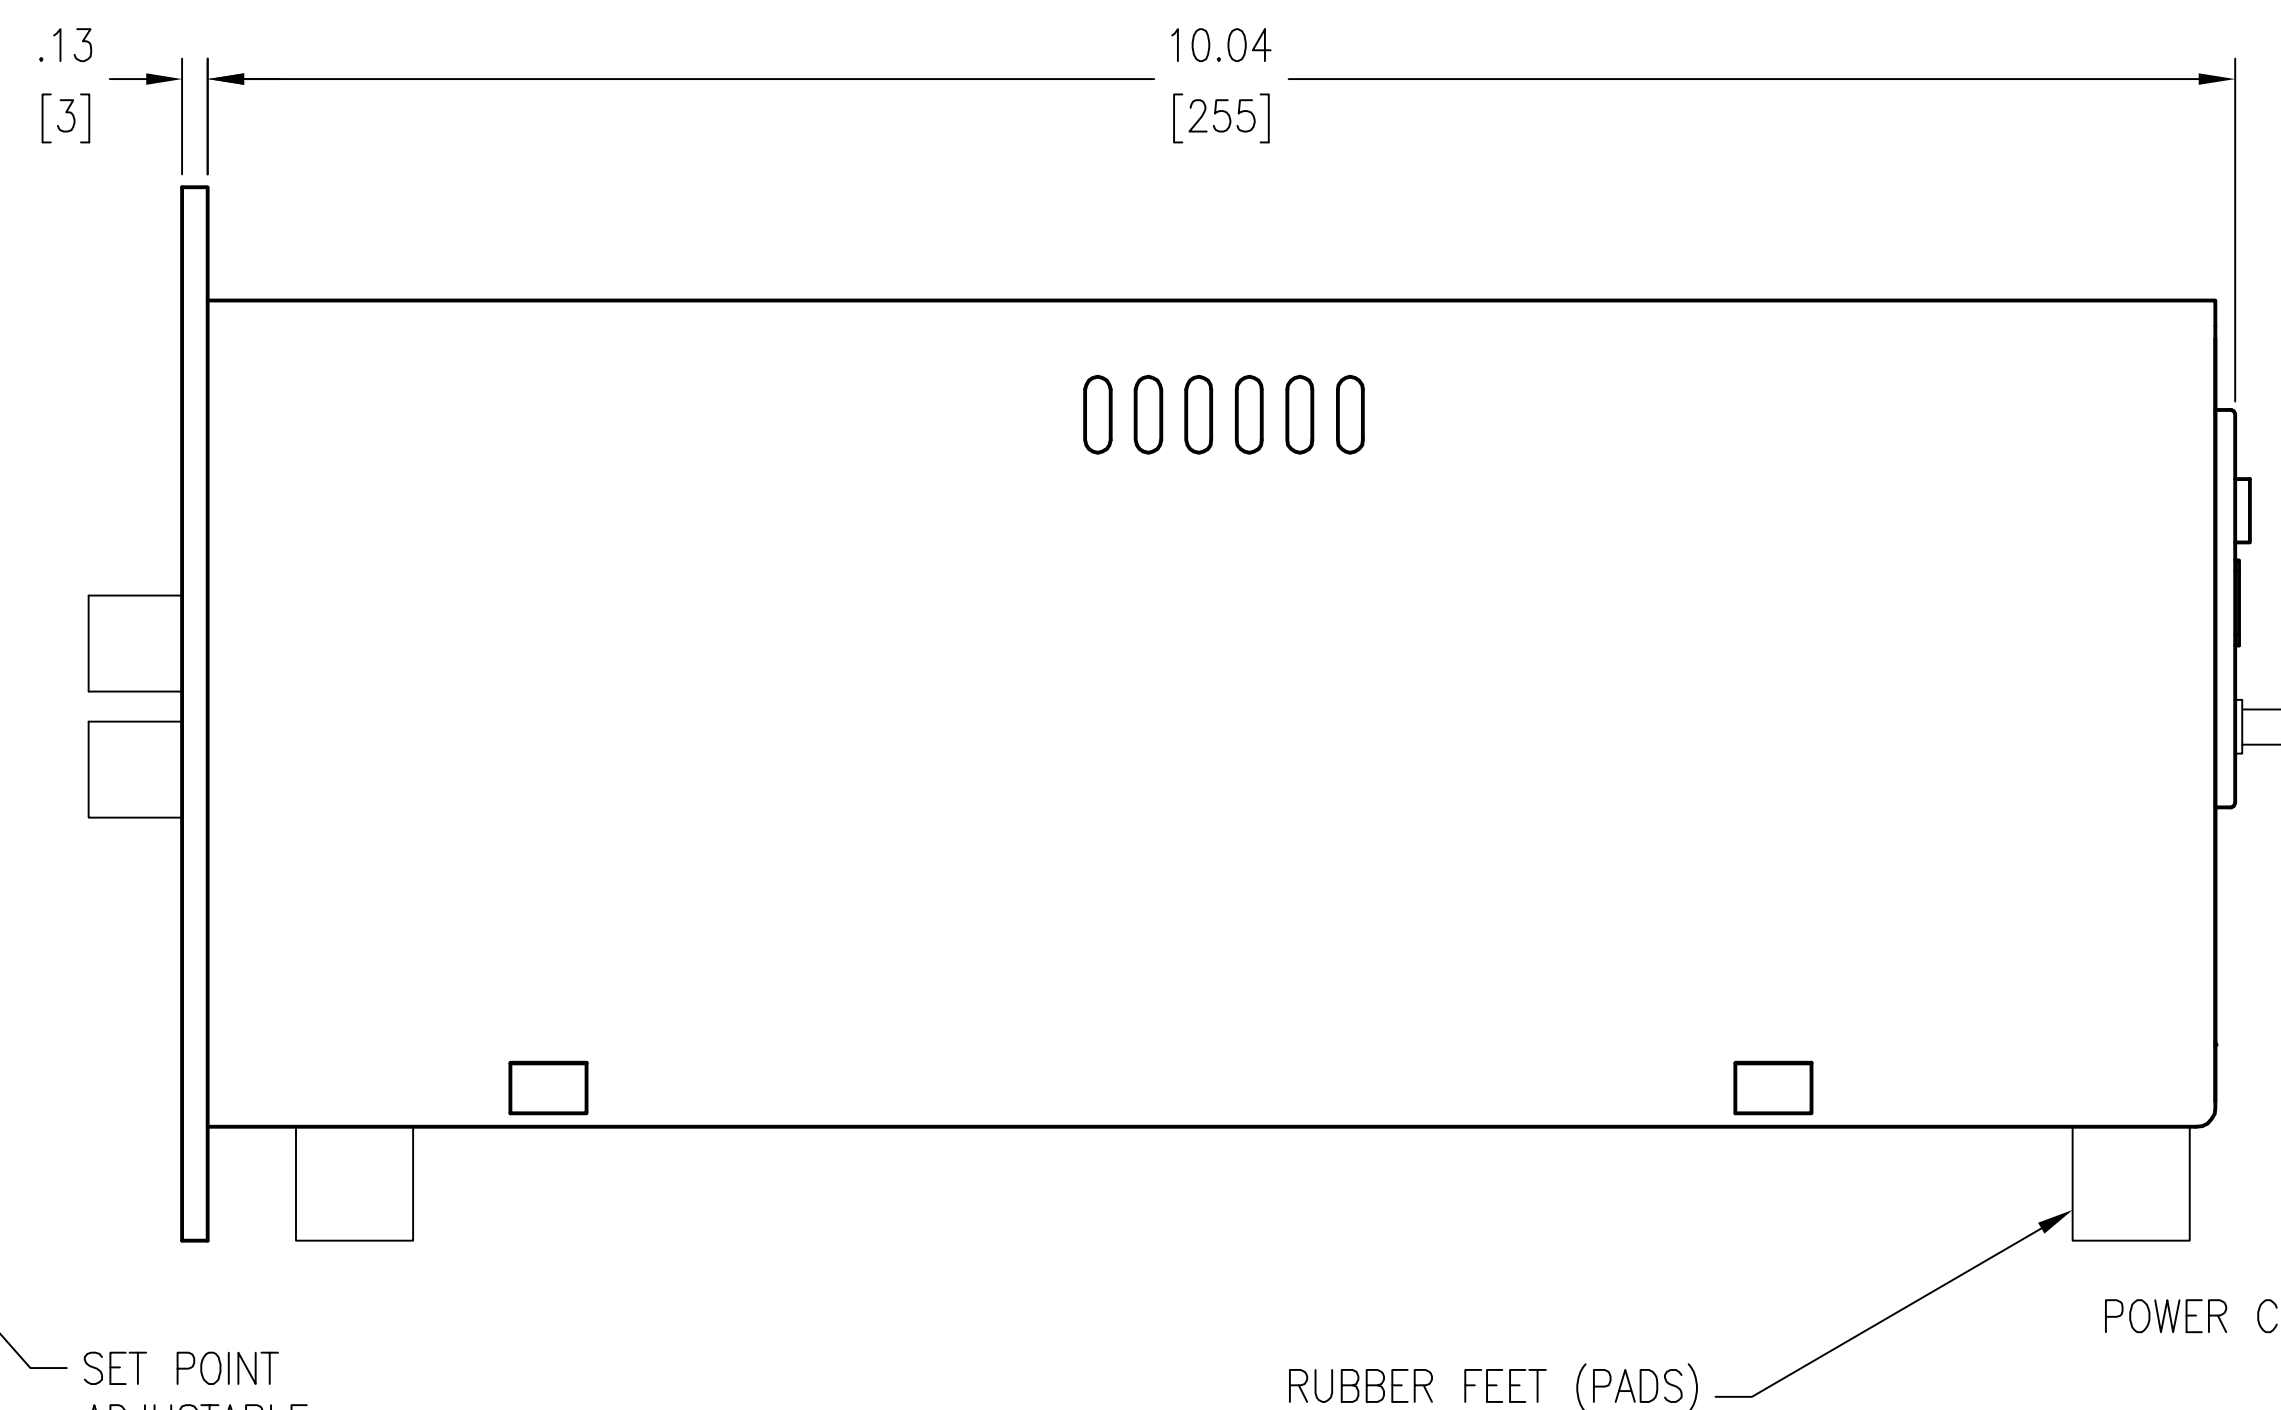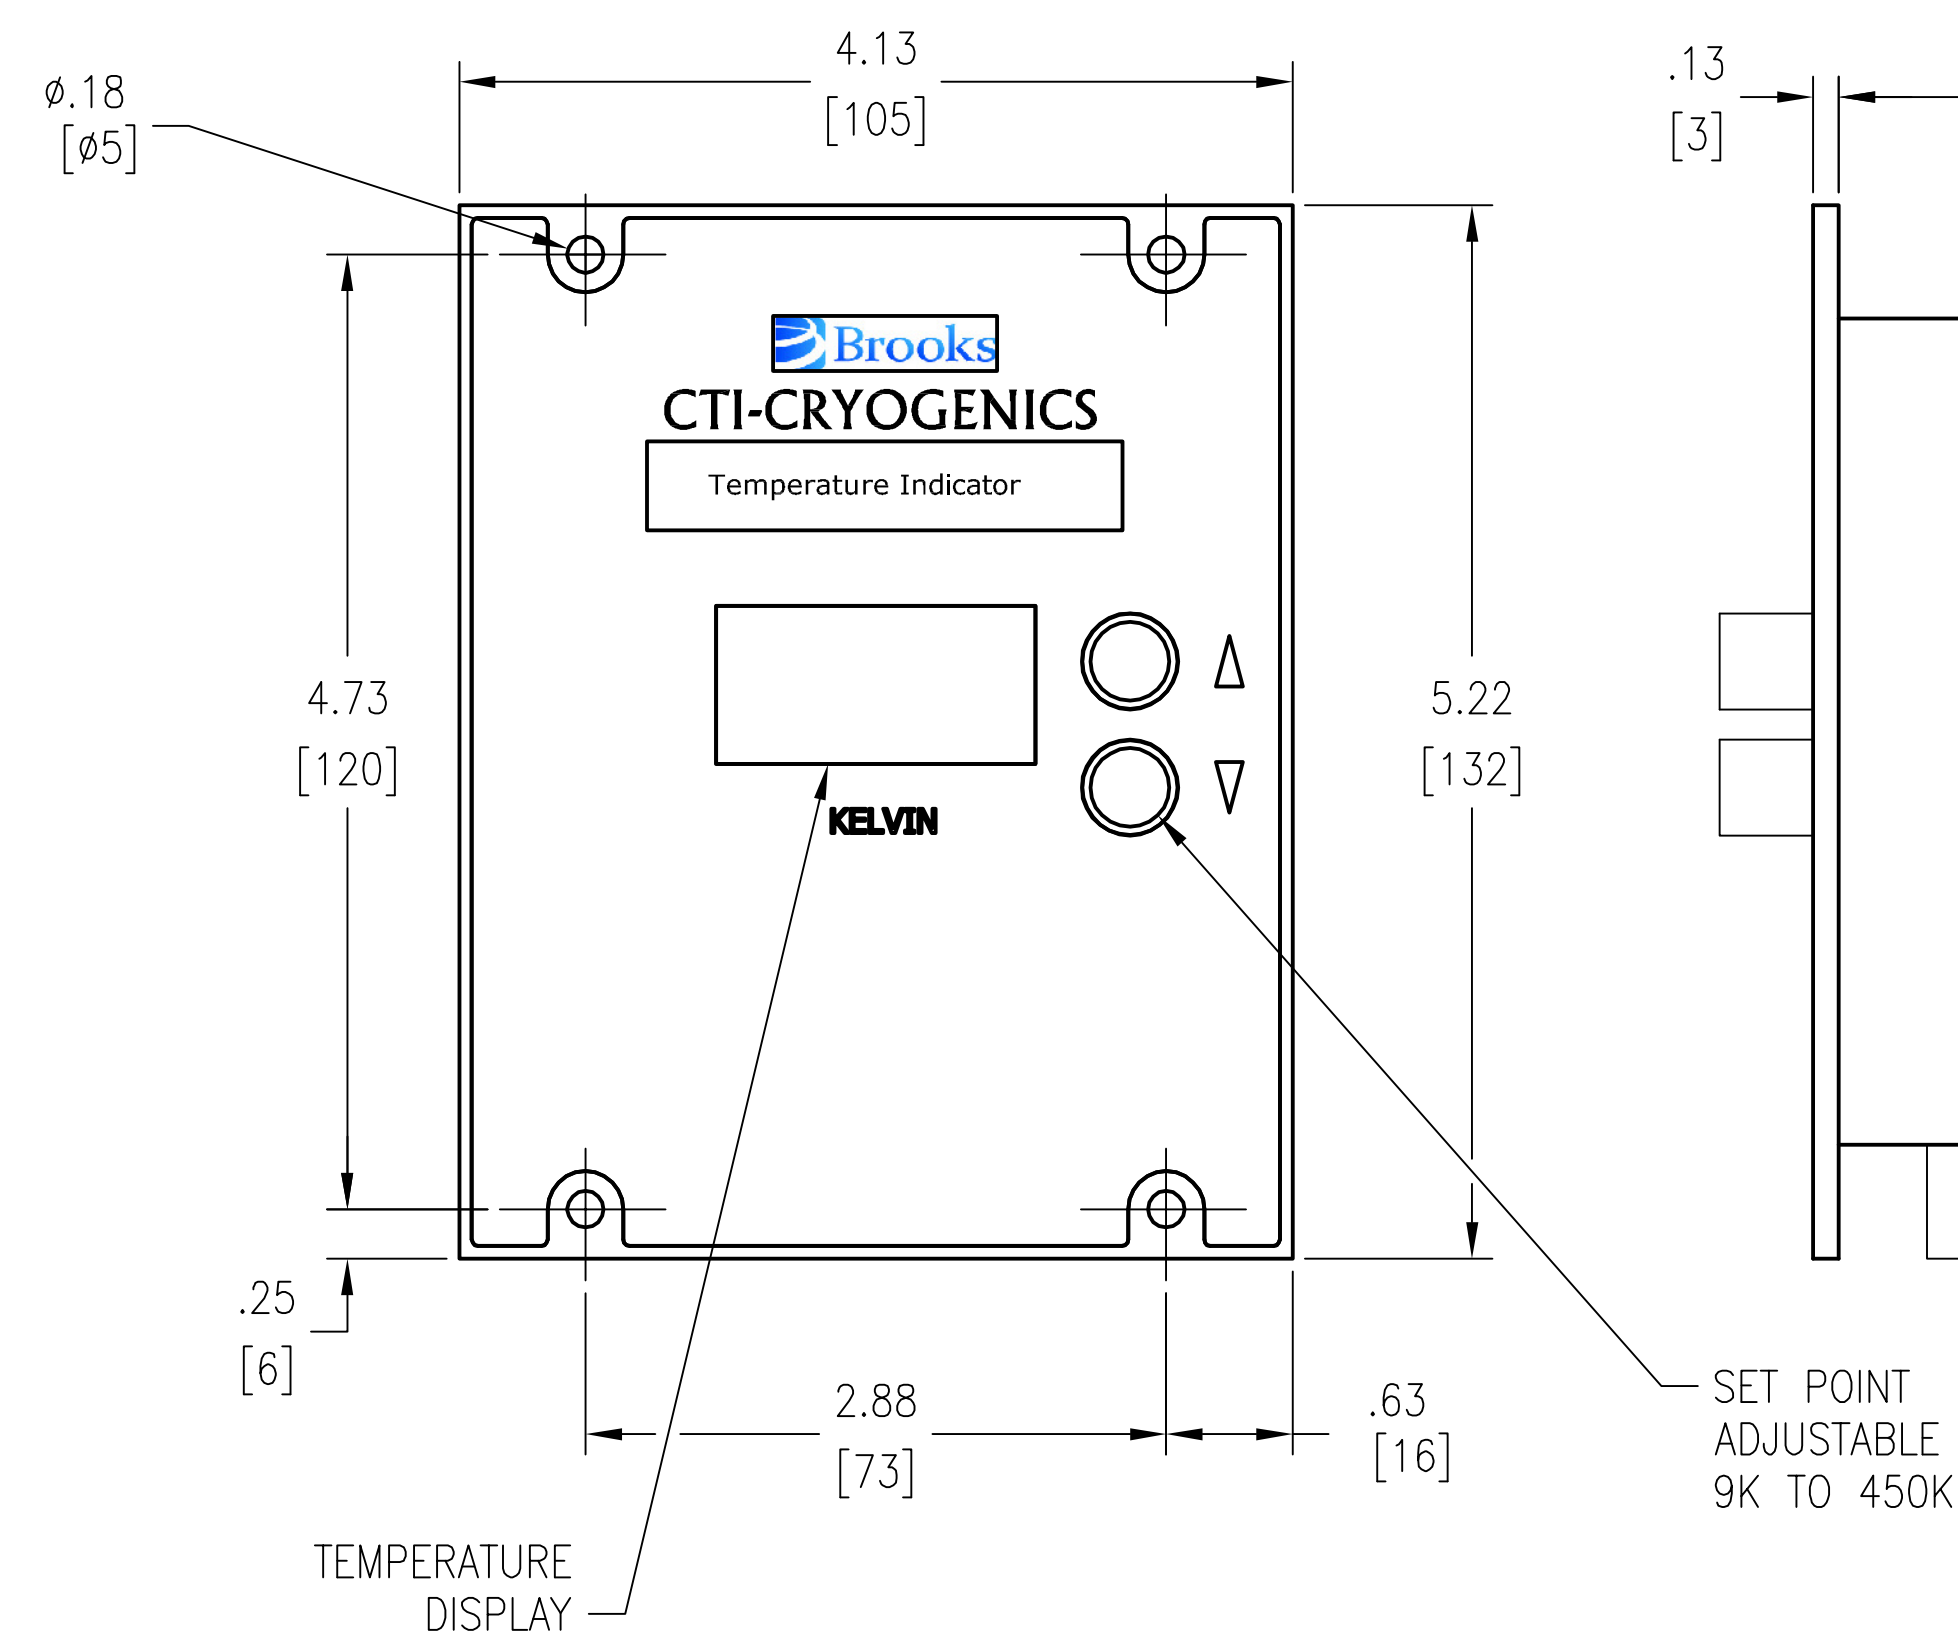



| RELAY CONNECTOR PINOUT | | | |
|------------------------|----------------------|---------------|----------------------|
| PIN NUMBER | LOW SETPOINT | PIN NUMBER | HIGH SETPOINT |
| 1 | COMMON | 4 | COMMON |
| 2 | NORMALLY OPEN (ON) | 5 | NORMALLY OPEN (ON) |
| 3 | NORMALLY CLOSED (NC) | 6 | NORMALLY CLOSED (NC) |

| CONFIGURATION TABLE | |
|---------------------|---------------------------|
| DASH NO. | DESCRIPTION |
| -0001 | WITH 10 FEET SENSOR CABLE |
| -0002 | WITH 35 FEET SENSOR CABLE |

- SPECIFICATIONS:

1. SET POINTS: TWO TEMPERATURE SET POINTS ADJUSTABLE OVER A 1.5K TO 450 K RANGE.
2. ACCURACY TO BE: $\pm 0.1K$ FROM 9 TO 99.9K
 $\pm 1.0K$ FROM 100 TO 450K.
3. TO INSTALL IN ELECTRONICS RACK REMOVE RUBBER FEET USING A PHILLIPS SCREWDRIVER.
4. POWER REQUIREMENTS: 85 TO 265 VAC, 250 mA, 50/60Hz, SINGLE PHASE.
5. RESOLUTION: 0.1K FROM 9 TO 99.9K
1.0K FROM 100 TO 450K.
6. WEIGHT: 2 LBS
7. AMBIENT TEMPERATURE 40°F TO 120°F
8. DIMENSIONS ARE NOMINAL IN INCHES [MM]
9. RS-232 CONNECTOR MATES WITH DB-9 MALE CONNECTOR.

| | | | |
|--|--|--|--|
| CTI-CRYOGENICS® MODEL NAME: 211998 TYPE: ASSY ECO NO: EC 70330 THIRD ANGLE PROJECTION  AUTOCAD | |  Brooks DWG TITLE: 1/1 TEMPERATURE INDICATOR SIZE: D DWG NO: 211998-TX SCALE: 1:1 SHT: 1 OF 1 REV: A | |
|--|--|--|--|