


### PUNTALE ROTONDO - ROUND PIN





Articolo Type	Sezione mm <sup>2</sup> Section mm <sup>2</sup> (AWG)	B	E	A	L	d	D	Utensile art. Tool	Conf/Imballo pz Pack/Carton pcs
BM 00150	0,25 ÷ 1,5 (22-16)	1,8	12	10,4	22,4	1,95	4,20	536 1661 534 5341	100/1000
BM 00151		1,8	9	10,4	20	1,95	4,20		100/1000
BM 00250	1,5 ÷ 2,5 (16-14)	1,8	12	11	23	2,45	4,80		100/1000
BM 00251		1,8	9	11	20	2,45	4,80		100/1000
BM 00350	4 ÷ 6 (12-10)	2,6	14	14	28	3,50	6,60		50/500

IMQ - c.s. E-B170 (0,5-1,5 mm<sup>2</sup>)  
E-B171 (1,5-2,5 mm<sup>2</sup>)  
E-B172 (4-6 mm<sup>2</sup>)


file n° E 137735

### PUNTALE PIATTO - BLADE PIN

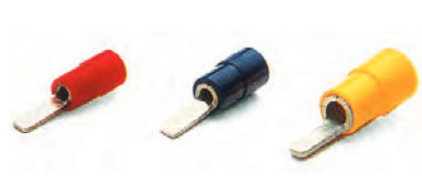

Articolo Type	Sezione mm <sup>2</sup> Section mm <sup>2</sup> (AWG)	B	E	A	L	d	D	Utensile art. Tool	Conf/Imballo pz Pack/Carton pcs
BM 00152	0,25 ÷ 1,5 (22-16)	2,8	9	9,5	18,5	1,9	4	536 1661 534 5341	100/1000
BM 00153		3	14,5	9,5	24	1,9	4		100/1000
BM 00252	1,5 ÷ 2,5 (16-14)	2,8	9	9,5	18,5	2,5	4,5		100/1000
BM 00253		2,8	16	9,5	25,5	2,5	4,5		100/1000
BM 00352	4 ÷ 6 (12-10)	2,8	10,4	14	24	3,5	6,6		50/500
BM 00353		4,5	18	14	32	3,5	6,6		50/500

### CONNETTORE RAPIDO - RAPID CONNECTOR



Materiale involucro isolante: (PP) polipropilene  
Tensione nominale: 300 V  
Temperatura d'esercizio: T 90°C



Housing material: (PP) polypropylen  
Voltage rating: 300 V  
Maximum temperature of exercise: T 90°C

Articolo Type	Sezione mm <sup>2</sup> Section mm <sup>2</sup> (AWG)	A	B	L	Conf/Imballo pz Pack/Carton pcs
BM 00110	0,25 ÷ 1 (22-18)	15,3	10	20	500/500
BM 00210	1,25 ÷ 2,5 (18-14)	15,9	10	20	500/500
BM 00310	4 ÷ 6 (12-10)	17,5	12	21	250/250