


Technical data sheet

Product: Centrifugal Pump;
 Manufacturer: EBARA;
 Type: DWO 150;

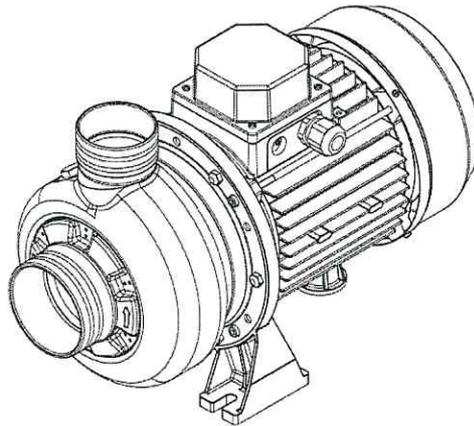

PUMP		
Liquid Handled	Type of liquid	Clean water
	Temperature [°C]	min. -5 max. +90 (Standard mechanical seal) max. +110 (Optional and Q1AVGG mechanical seal) max. +120 (VAEGG, Q1U3EGG, U3BEGG mechanical seal)
Maximum working pressure [MPa]		0,8
Construction	Impeller	Open centrifugal type
	Shaft seal type	Mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction	G 2
	Discharge	G 2
Material	Casing	AISI 304
	Impeller	AISI 304
	Casing cover	AISI 304
	Shaft seal	Ceramic/Carbon/NBR
	Casing cover	AISI 304
	Shaft	AISI 304 (Wet extension)
Bracket	Aluminium	
Applicable standard of test		ISO 9906:2012 - Grade 3B


Gospodarstwo rybne FALKO
 Andrzej Falkowski
 Boksze Osada 10A
 16-515 Puńsk



TAX: 8461036804
 www.falko-ryby.eu
 e-mail: falko@falko-ryby.eu
 phone: +48 605 888 466

	Power		Q=Capacity									
	[kW]	[HP]	l/min	0	100	200	300	400	550	750	950	1100
			m ³ /h	0	6	12	18	24	33	42	57	66
DWO 150	1,1	1,5		9,8	9,5	8,9	7,9	6,9	5,1	-	-	-

DWO 150 (1.1 kW) - Impeller diameter = 88 mm

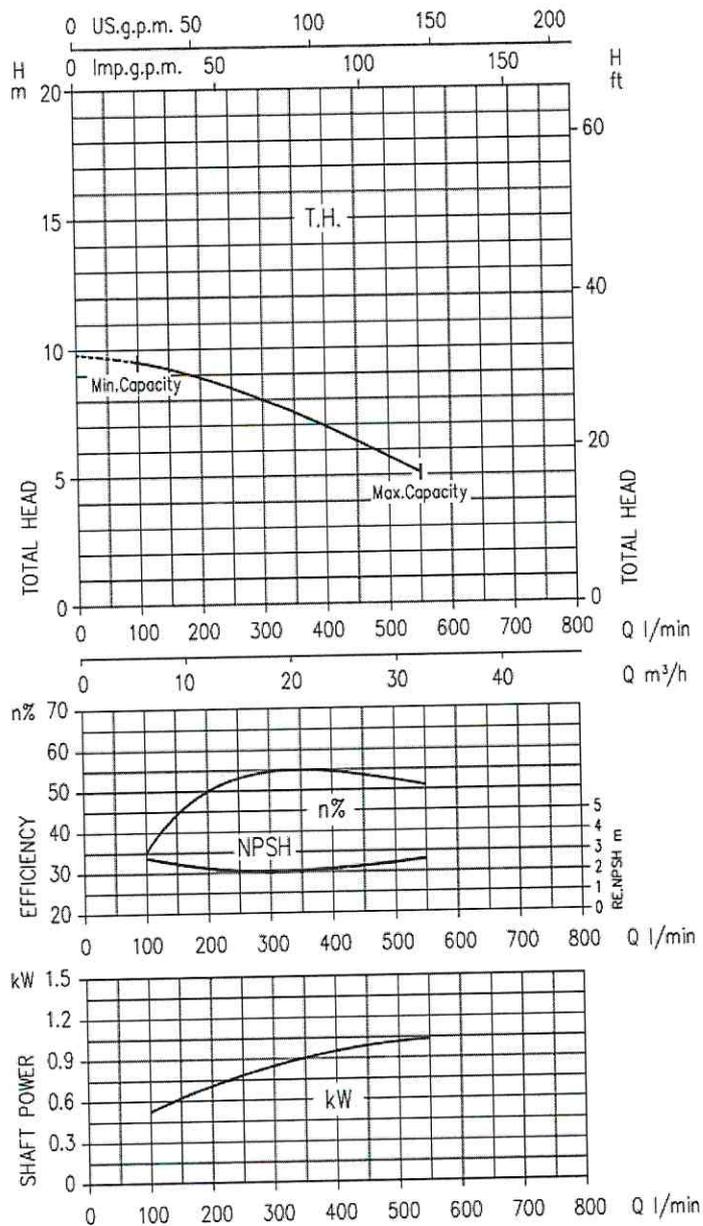

Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906:2012 - Grade 3B

Gospodarstwo rybackie FALKO
 Andrzej Falkowski
 Boksze Osada 10A
 16-515 Puńsk



TAX: 8461036804
 www.falko-ryby.eu
 e-mail: falko@falko-ryby.eu
 phone: +48 605 888 466